



CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner, Section 36, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

November 20, 1998; Northern Lights Surveying and Mapping, Inc. set a brass capped Steel pipe in County Road 4 as a perpetuation of the original General Land Office corner

SKETCH OF REFERENCE TIES & EVIDENCE

T.143N., R.27W.

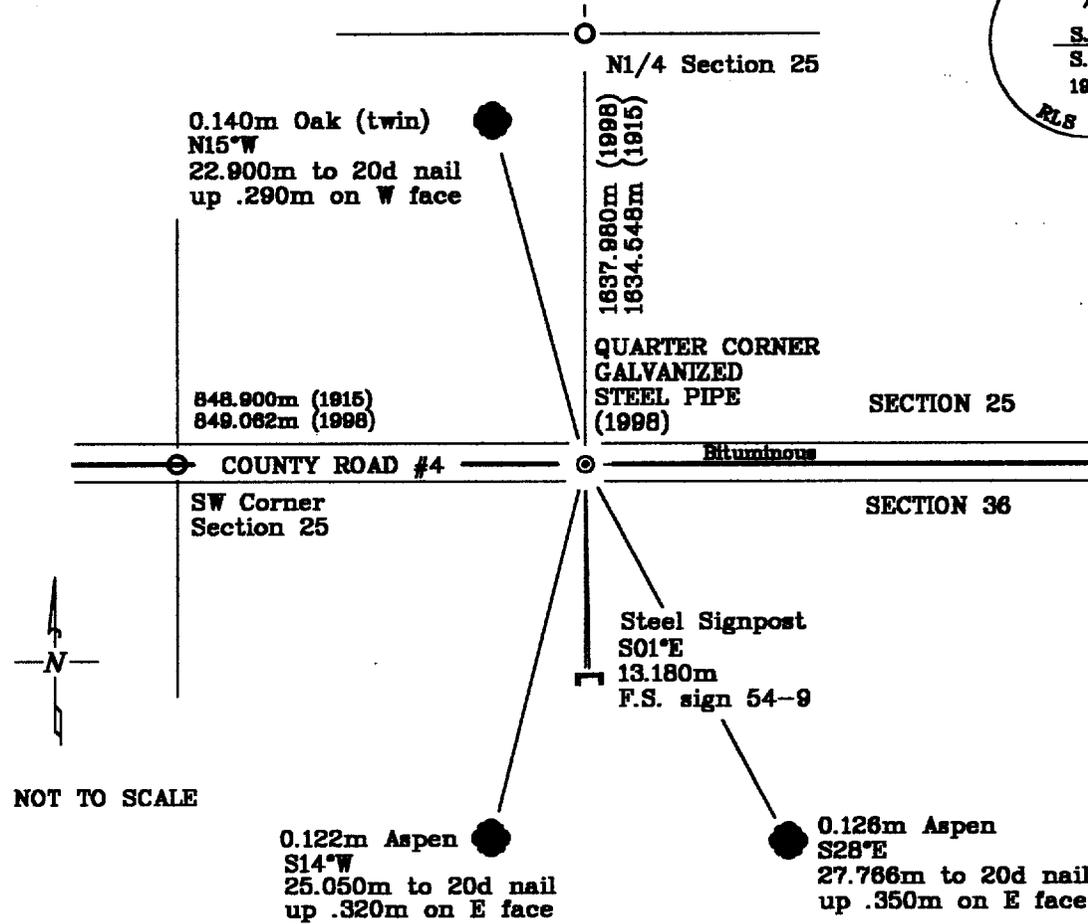

NOT TO SCALE

Bearings are Grid
North, Minnesota
Central Zone, measured
with a hand compass
adjusted to 3° East
declination.

New bearing trees were
blazed, scribed & painted
red. A tag stating the
bearing & distance was
affixed to the tree. A
nail was placed in the base
of the tree and the distance
was measured from the
monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling 5-13-99
LaVerne Leuelling Date
Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412865
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 1:00 P.M. Date: May 17, 1999
Recorder Claudine Taylor
By K.F. Deputy
DOCUMENT NO. 412865

Statement of Evidence

North Quarter Corner, Section 36, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post and referenced it with the following:

10" (0.254m) Elm	6" (0.152m) Birch
N8°W	S66°W
14 Links (2.816m)	13 Links (2.615m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

February, 1915; Cass County Survey Record #328, Book "B", pp.456-462; Curro and Donner found the G.L.O. birch down with a scribe visible; they set a 60d spike for the corner and referenced it with the following:

8" (0.203m) Birch	16" (0.406m) Birch	10" (0.254m) White Pine Stump
N89°35'W	S50°15'E	N51°E
15.80 Feet (5.816m)	55.05 feet (16.780m)	52.35 Feet (15.958m)

Their distance to the N1/4 of Section 25 was 5362.68 feet (1634.548m) and their distance to the Southwest corner of Section 25 was 2785.10 feet (848.900m).

October, 1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) Field Book #1, p. 5; Curt Krause searched for a half hour, but found no evidence of the corner or its witnesses.

August, 1997; U.S.D.A.-F.S. Field Book #1, p. 5; Rob Main and Curt Krause occupied a pin at the intersection of the centerline of County Road #4 and an old fence line running north, and used it as a resource grade GPS position.

September 1998: Northern Lights Surveying & Mapping, Inc. crew of Heinle & Carlson occupied the 1997 USDA-FS pin with GPS and defined it's position.

November, 1998; Northern Lights Surveying and Mapping, Inc., and Cass County crews excavated a 4'x 20' search area 1 1/2' down to natural soil. Nothing was found.

November 20, 1998; NLSM crew of Heinle and Carlson returned to site and set a 0.015m diameter galvanized steel pipe 0.610m long, with a brass cap, below the bituminous for the quarter corner. The following references were then established:

0.126m Aspen	0.122m Aspen	0.140m Oak (twin)
S28°E	S14°W	N15°W
27.766m to 20d nail	25.050m to 20d nail	22.900m to 20d nail
up .350m on E face	up .320m on E face	up .290m on W face

Steel Signpost
S01°E
13.180m
F.S. sign 54-9

The corner was set to reproduce the position tied into by Donner & Curro in the 1915 Cass County road survey. The resultant corner was 849.062 meters east of the SW of Section 25 and 1637.920 meters south of the N1/4 of Section 25.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p. 20.

Coordinates:

Cass County North

Northing = 70943.630 meters
Easting = 165803.167 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340934.951 meters
Easting = 815929.739 meters

Latitude = 47°10'02.74197" North
Longitude = 94°02'23.64306" West