


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner, Section 2, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

January 5, 1999; Northern Lights Surveying and Mapping, Inc., (NLSM) set an aluminum capped, aluminum rod at the quarter corner based on a "Lost" calculated position. A GLO feature call is compatible with this position.

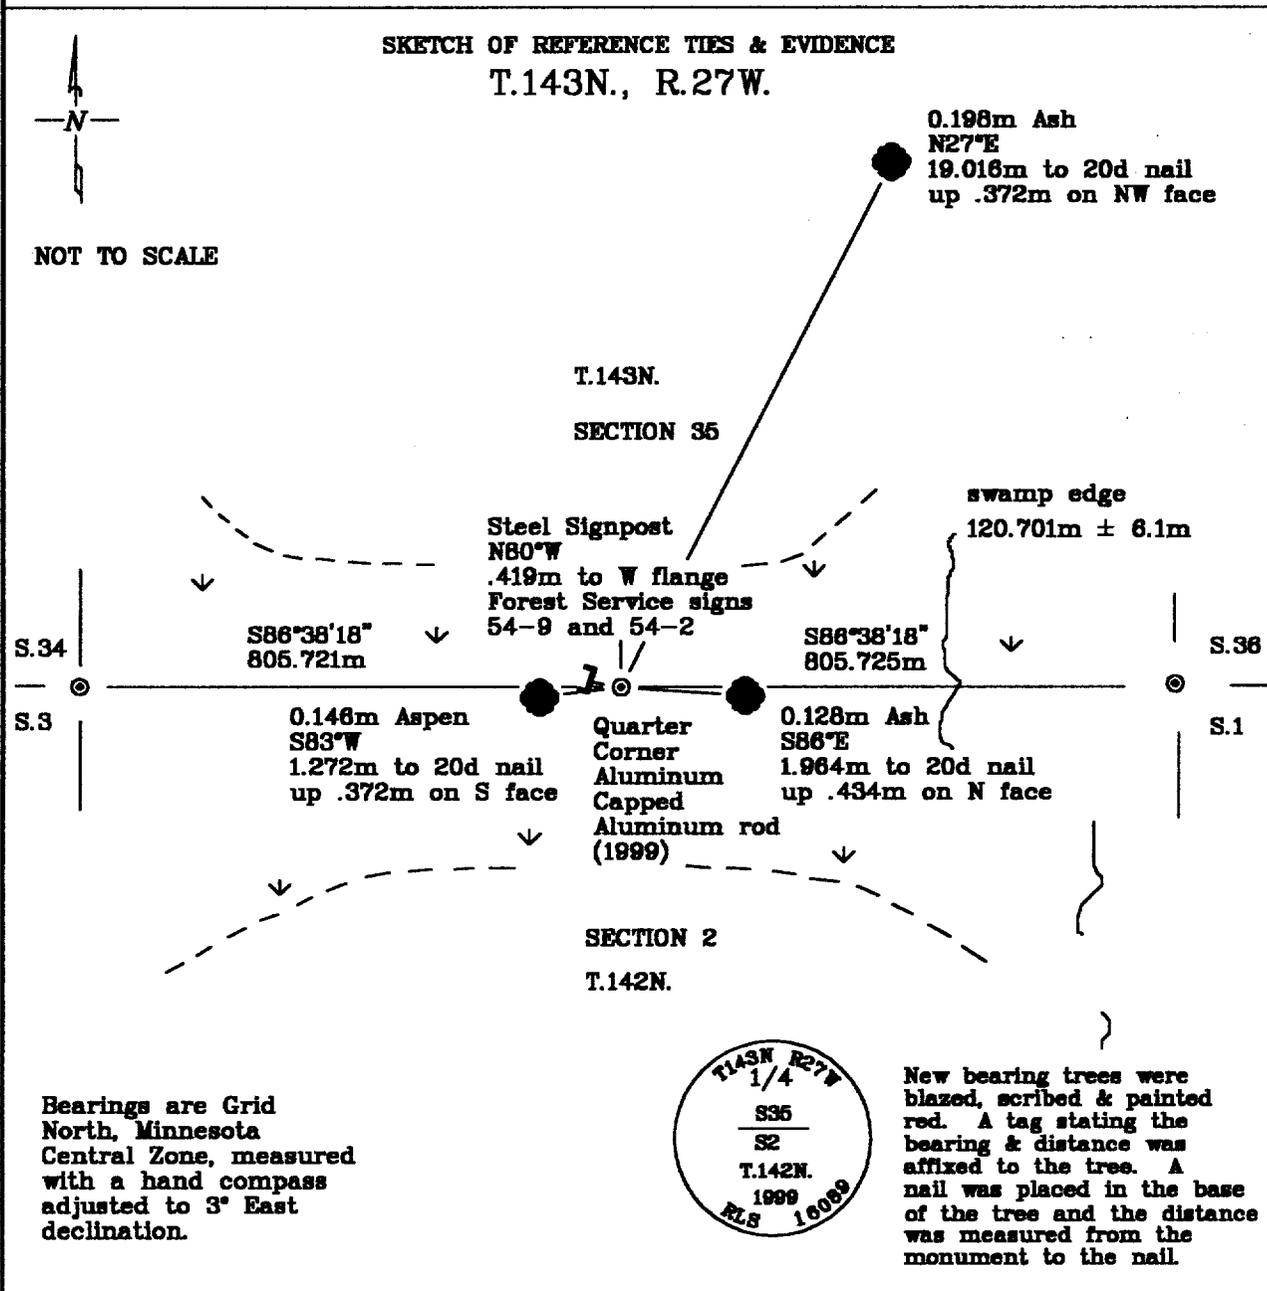

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling

Date

5-20-99

Licensed Land Surveyor No. 18089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413182
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 4:15 P.M. Date: May 25, 1999
Recorder Claudine Taylor

By K.F. Deputy

DOCUMENT NO. 413182

Statement of Evidence

Page 2 of 2

North Quarter Corner, Section 2, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor P.H. Conger set a wooden post for the quarter corner and established the following references:

8"(.203m) Spruce	7"(.178m) Spruce
S52°E	N62°W
22 Links (4.426m)	15 Links (3.018m)

The corner fell in a large swamp. The eastern edge lay 6 chains east of this corner.

Said records are on file with the Secretary of State, St. Paul, Minnesota; Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

January 5, 1999; Northern Lights Surveying and Mapping, Inc., set a 0.019m diameter aluminum rod, 1.829m long, with a stamped 0.083m diameter aluminum cap, that measured .232m above the ground. The corner was set as a "Lost" position, and there were swamp calls that were checked. The following references were then established:

0.198m Ash	0.128m Ash	0.148m Aspen
N27°E	S86°E	S83°W
19.018m to 20d nail	1.984m to 20d nail	1.272m to 20d nail
up .372m on NW face	up .434m on N face	up .372m on S face
Steel Signpost		
N80°W		
.419m to W flange		
Forest Service signs		
54-9 and 54-2		

G.L.O survey call: Swamp edge at 6.00 chains (120.701m)

NLSM survey finds the swamp edge to be within 20'±(6.1m) of the original GLO survey.

The corner also falls in a restricted drainage which is 20m wide in the north-south direction. Any appreciable movement in latitude would have made the GLO spruce Bearing Trees unlikely.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p. 74.

Coordinates:

Cass County North

Northing = 69274.969 meters
Easting = 164151.646 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 339,265.700 meters
Easting = 814,278.934 meters

Latitude = 47°09'08.82481" North
Longitude = 94°03'42.21270" West