


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner, Section 34, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

January 14, 1999, Northern Lights Surveying and Mapping, Inc. monumented the quarter corner midway & on line between the northeast & southeast corners of section 34.

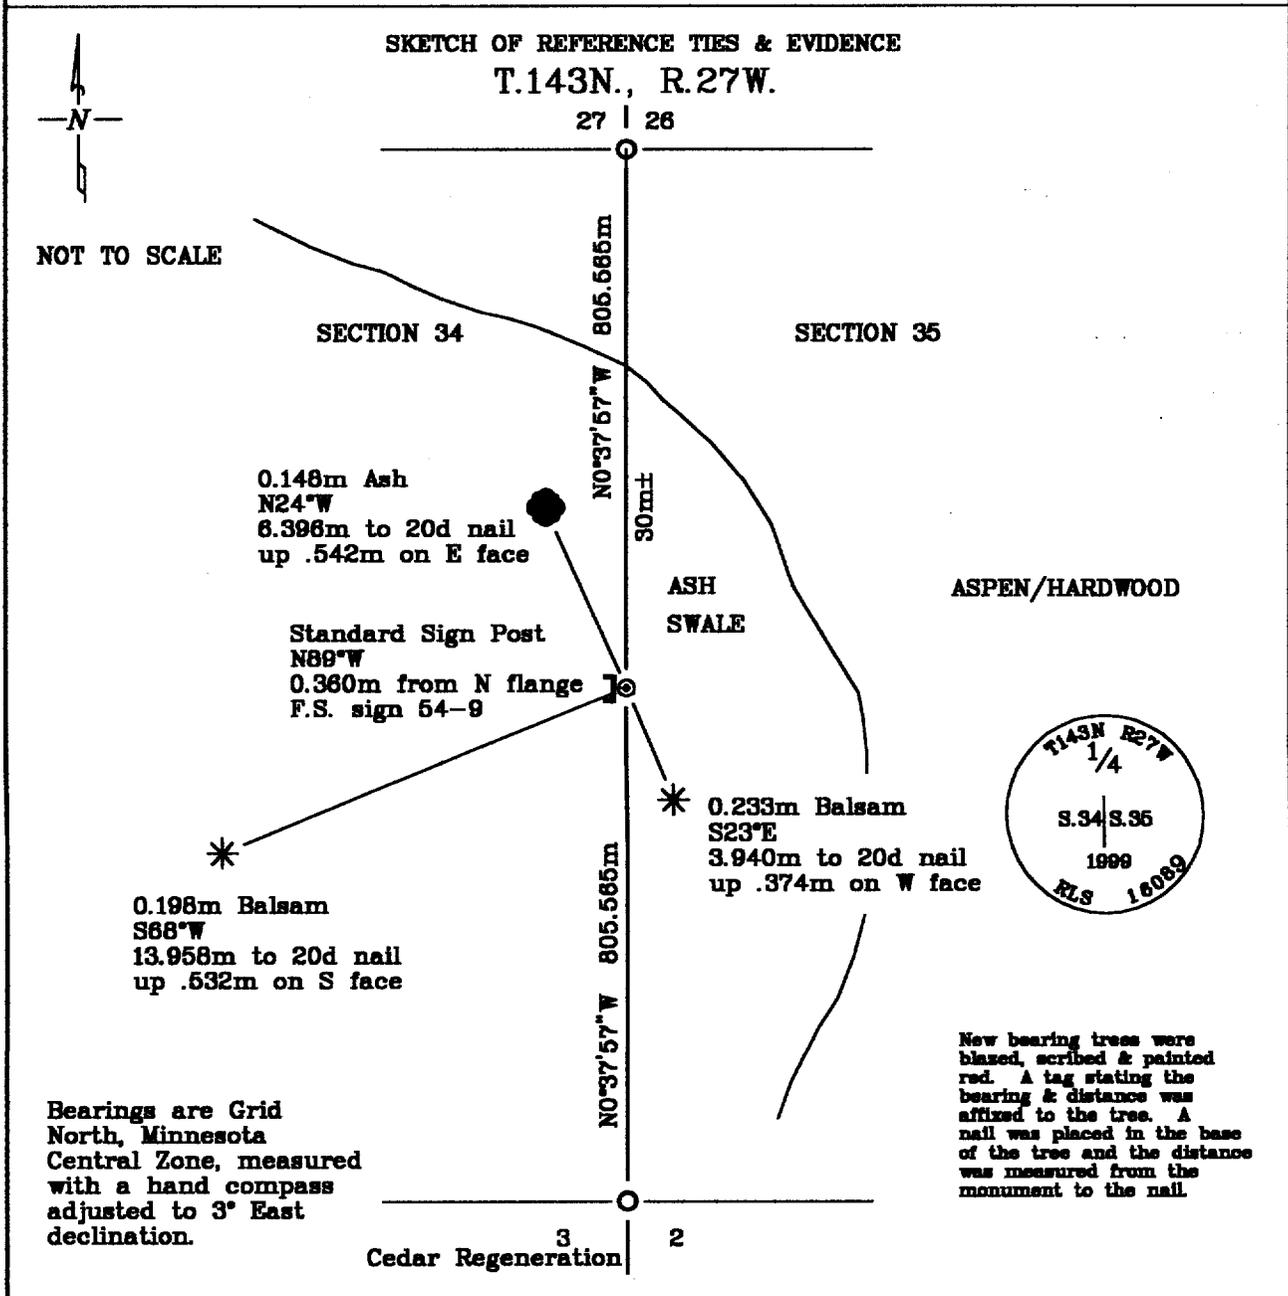

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Wayne Leuelling*                      5-20-99  
Wayne Leuelling                      Date  
Licensed Land Surveyor No. 16089  
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413184  
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 4:25 P.M. Date: May 25, 1999  
Recorder Claudine Kaylor  
By K.F. Deputy  
DOCUMENT NO. 413184

## Statement of Evidence

East Quarter Corner, Section 34, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

6" (0.152m) Cedar	5" (0.127m) Cedar
S85°W	S32°E
12 Links (2.414m)	9 Links (1.811m)

The corner fell 2 chains south of the edge of a swamp.

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

November, 1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N. R.27W. Book #1, p. 19; Curt Krause cruised to the position from an approximate section corner to the north. No evidence of the corner or references were found.

October 21, 1998; Northern Lights Surveying and Mapping, Inc. crew of Foster and Brunner cruised to and found Krause's 1969 location poster on a 0.150m diameter ash snag. The crew established two GPS control points and searched the area for any conclusive G.L.O. evidence; none was found at this time.

January 14, 1999; Northern Lights Surveying and Mapping, Inc., crew of Heinle and Carlson returned and searched area. Finding no evidence they set a 0.019m diameter aluminum rod with a 0.083m diameter aluminum stamped cap, 2.900m long, standing .174m above the ground at the "lost" position and established the following references:

0.233m Balsam  
S23°E  
3.940m to 20d nail  
up .374m on W face

0.198m Balsam  
S68°W  
13.958m to 20d nail  
up .532m on S face

0.148m Ash  
N24°W  
6.396m to 20d nail  
up .542m on e face

Standard Sign Post  
N89°W  
0.360m from N flange  
F.S. sign 54-9

## Coordinates:

## Cass County North

Northing = 70033.630 meters  
Easting = 163338.762 meters

State Plane Coordinate System  
Minnesota Central Zone  
NAD 83

Northing = 340,024.010 meters  
Easting = 813,465.779 meters

Latitude = 47°09'33.44031" North  
Longitude = 94°04'20.73042" West