


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness to Meander Corner #17, common to Sections 31 and 32, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota, on the north shore of Boy River.

January, 1999; Northern Lights Surveying and Mapping, Inc., set an aluminum capped aluminum rod as the WC to the MC on the N. bank of Boy River 50m north of the proportioned position, and on the section line.

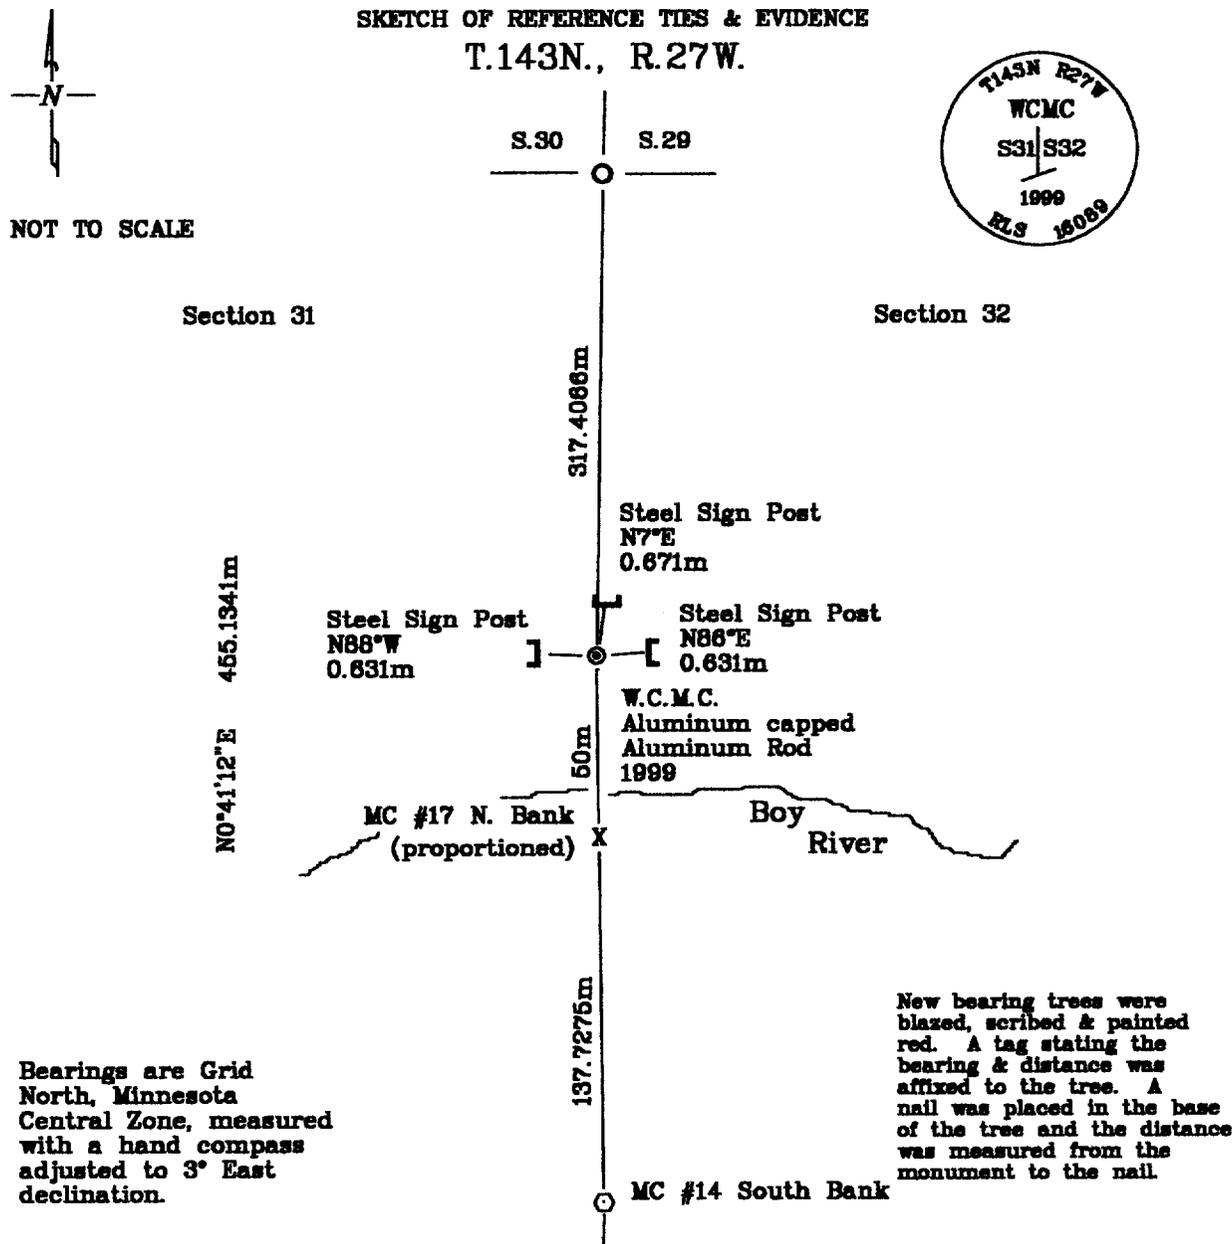

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling
LaVerne Leuelling Date 5-30-1999
Licensed Land Surveyor No. 18089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413417
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 10:00 A.M. Date: 6-3-99
Recorder Claudine Kaylor
By K.F. Deputy
DOCUMENT NO. 413417

Statement of Evidence

Page 2 of 2

Witness to Meander Corner #17, common to Sections 31 and 32, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota, on the north shore of Boy River.

1873; General Land Office (G.L.O.) survey records; William Allen, deputy surveyor, set a post 83.96 chains north of the SE corner of section 31 on the north bank of the Little Boy River. The south bank meander corner was 57 chains from the same section corner. The bearing trees were listed as:

6" (.152m) Tamarack	5" (.127m) Tamarack
N13°W	N2°E
465 Links (93.543m)	500 Links (100.584m)

1928; G.L.O. survey records; Wesson Cook, transitman, rediscovered the meander corner on the south bank of Boy River, but did not find this corner, nor did he find the NE corner of section 31 (which was restored by double proportionment). This meander corner was not restored at this time.

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1999; Northern Lights Surveying and Mapping, Inc., crew of Heinle and Miro attempted to set this meander corner proportionally between the NE corner of section 31 and the south shore meander corner. The position is located in the river and a witness corner was set 50m to the north of the proportioned position and on the section line. A 0.019m diameter aluminum rod, 5.032m long, with a stamped 0.083m diameter aluminum cap was set 0.250m above the ground, and the following references were established:

Steel Sign Post	Steel Sign Post	Steel Sign Post
N86°E	N7°E	N88°W
0.631m	0.671m	0.631m

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p.24

Coordinates:

Cass County North

Northing = 70663.534 meters
Easting = 158463.979 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340,651.930 meters
Easting = 808,590.915 meters

Latitude = 47°08'54.08289" North
Longitude = 94°08'12.11492" West