


### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner, Section 26, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

January 11, 1999; Northern lights Surveying and Mapping Inc. set a brass capped pipe at a "lost" position, midway and on line, between sections 23 and 26.

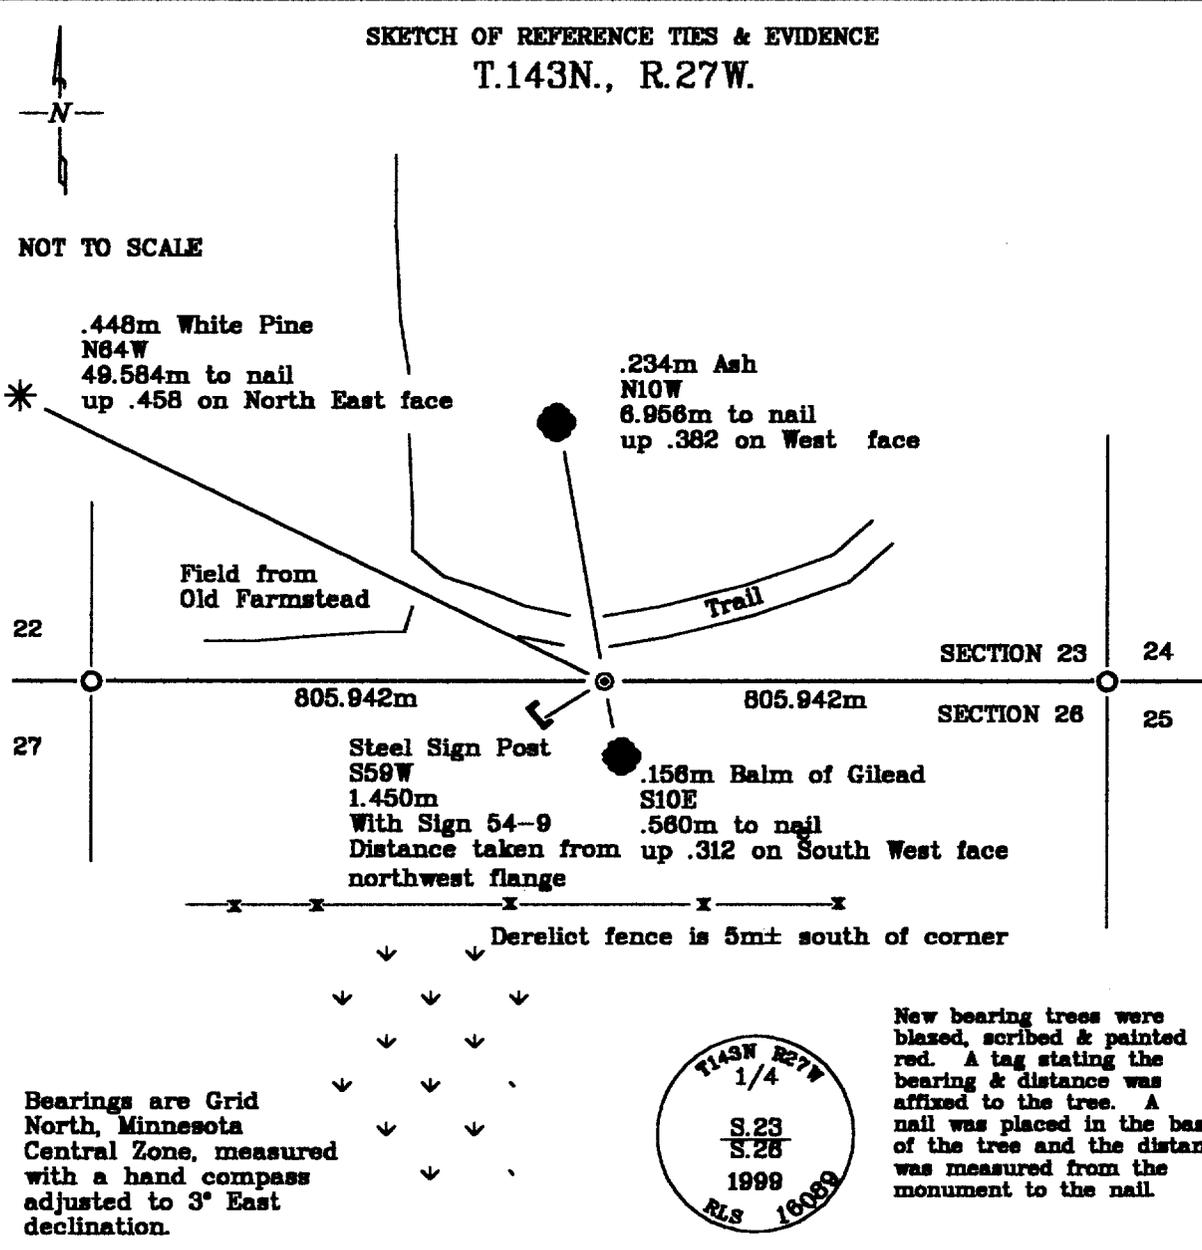

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

*LaVerne Leuelling* 5-30-1999  
 LaVerne Leuelling Date

Licensed Land Surveyor No. 16089  
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413419  
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 10:10 A.M. Date: 6-3-99

Recorder Claudine Kaylor

By K.F. Deputy

DOCUMENT NO. 413419

## Statement of Evidence

North Quarter Corner, Section 26, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

8" (0.203m) Fir	8" (0.203m) Cedar
N12°W	S39°W
18 Links (3.621m)	16 Links (3.219m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N. R.27W. Field Book #1, p. 24; Curt Krause noted that the corner fell at the edge of an old homestead clearing with heavy burn; no large trees were in the area. A large White Pine stood on a knoll in the clearing. He found a squared Aspen along a fence, but the blazing on it was not very old.

December 3, 1998; Northern Lights Surveying and Mapping Inc. crew of Foster and Heinle searched the position based upon a proportioned Northwest of 26 and Northeast 26 recreated by parole evidence. Guy Robbins, who established the fence, said he did so without knowing the location of the Quarter Corner. He indicated that 2 cousins of his died in the house fire that destroyed the woods nearby.

January 11, 1999; Northern Lights Surveying and Mapping crew of Leuelling and Hienle set a brass capped galvanized steel monument at the "lost" position. A small pothole swamp lay 15± meters to the southwest, which would be compatible with the cedar bearing tree. The monument was set .196m above the ground and the following references were established:

.156m Balm of Gilead	.234m Ash
S10E	N10W
.560m to spike	6.956m to spike
up .312 on South West face	up .382 on West face
.448m White Pine	Steel Sign Post
N64W	S59W
49.584m to Spike	1.450m
up .458 on North East face	With Sign 54-9
	Distance taken from northwest Flange

## Coordinates:

State Plane Coordinate System  
Minnesota Central Zone  
NAD 83

## Cass County North

Northing = 72498.547 meters  
Easting = 184135.416 meters

Northing = 342,489.181 meters  
Easting = 814,261.430 meters

Latitude = 47°10'53.20393" North  
Longitude = 94°03'42.68011" West