


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner, Section 27, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December, 1998, Northern Lights Surveying and Mapping, Inc. set an aluminum capped aluminum rod at the double proportioned position between the North Quarter Corner of Section 27, the Northeast Corner of Section 26, the Southeast Corner of Section 23, and the East Quarter Corner of Section 27 after a wet and exhaustive search for evidence of the original General Land Office (G.L.O.) corner.

SKETCH OF REFERENCE TIES & EVIDENCE

T.143N., R.27W.

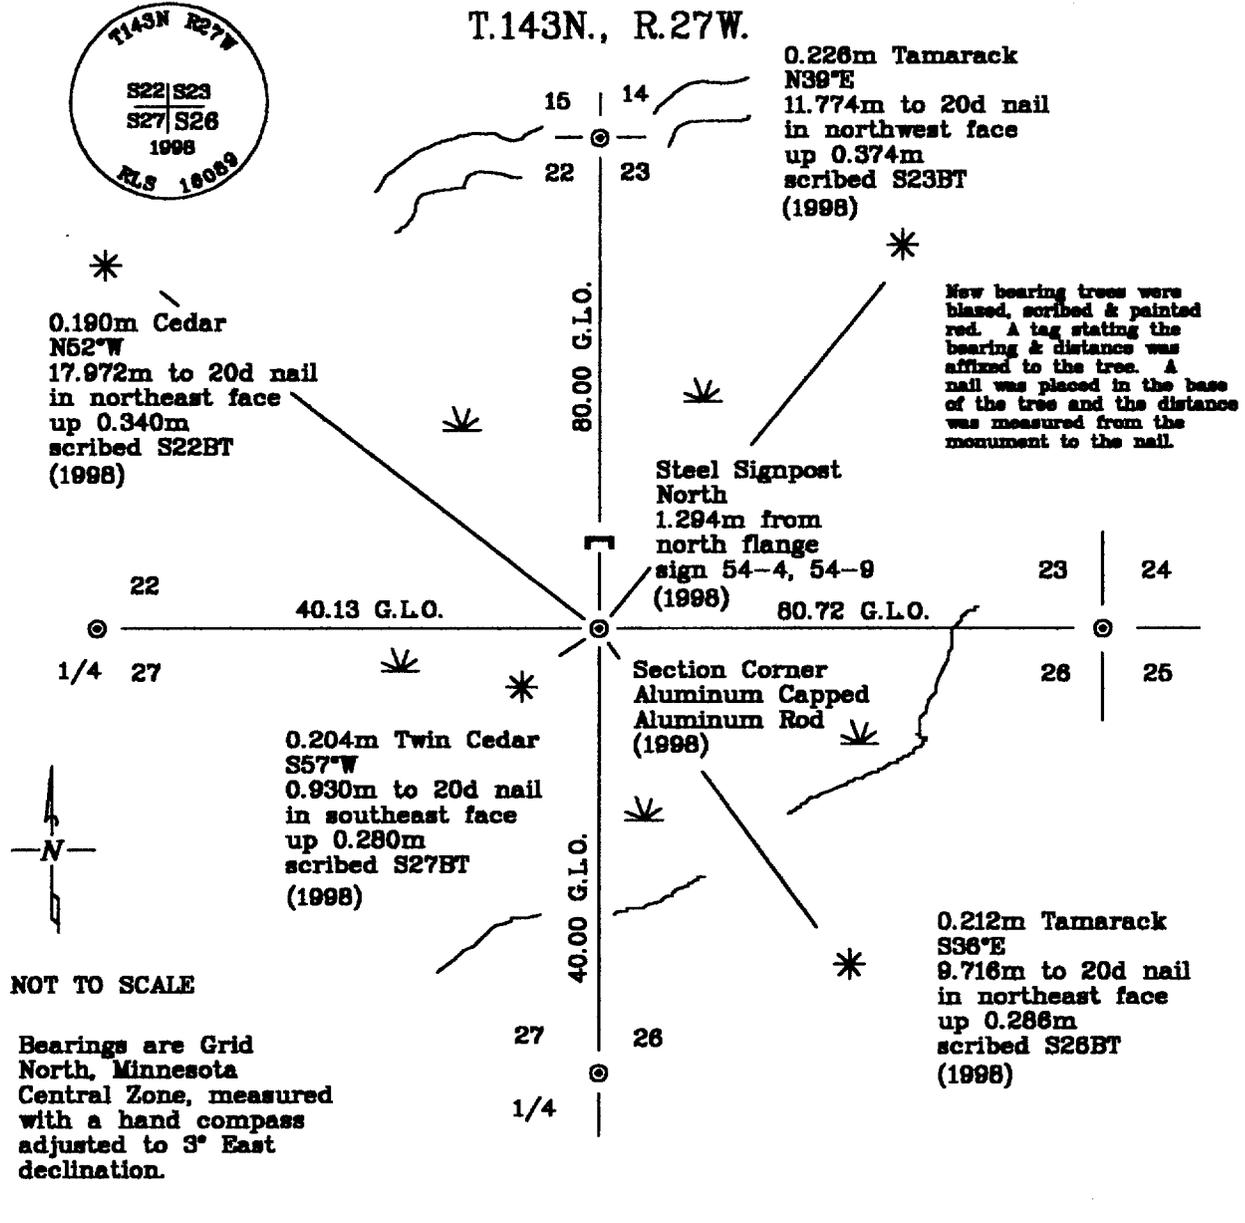

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota

Laverne Leuelling
 Laverne Leuelling Date 5-30-1999
 Licensed Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413420
 County of Cass

I hereby certify that this document was filed in the Recorder's office.
 Time: 10:15 A.M. Date: 6-3-99
 Recorder Claudine Kaylor
 By K.F. Deputy
 DOCUMENT NO. 413420

Statement of Evidence

Northeast Corner, Section 27, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the section corner and referenced it with the following:

5" (0.127m) Tamarack N50°W	5" (0.127m) Tamarack S40°W	8" (0.203m) Tamarack S28°E	5" (0.127m) Tamarack N45°E
15 Links (3.018m)	16 Links (3.219m)	13 Links (2.615m)	11 Links (2.213m)

The corner fell in a tamarack and cedar marsh. The corner fell 8 chains (160.935m) west of its east edge and 18.5 chains (372.162m) north of its south edge.

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1969-1970; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N. R.27W. Field Book #1, p. 23; unsigned note; chained to corner from section corner to south; chaining falls in road bearing northeast to southwest; could not find evidence. Put location poster on 10" (0.254m) Cedar N44°W 20 feet (6.096m) of picket in road.

October 23, 1998; Northern Lights Surveying and Mapping, Inc. crew of Leuelling and Heinle cruised to the corner location and established 2 GPS control points.

October 27, 1998; Northern Lights Surveying and Mapping, Inc. crew of Foster and Brunner returned to point established by Leuelling and Heinle on October 23, 1998, and made a secondary search for G.L.O. evidence with no success.

December, 1998; Northern Lights Surveying and Mapping, Inc. crew of Foster and Heinle returned to the area and after making a final search, set a 1.524m long, 0.019m diameter aluminum rod with a 0.083m diameter aluminum stamped cap, at the double proportioned position controlled by the northeast corner of Section 22, the southeast corner of Section 23, the west quarter of Section 26, and the north quarter of Section 27, respectively. The crew established the following references:

0.204m Twin Cedar S57°W	0.190m Cedar N52°W	0.226m Tamarack N39°E	0.212m Tamarack S36°E
0.930m to 20d nail in southeast face up 0.280m scribed S27BT	17.972m to 20d nail in northeast face up 0.340m scribed S22BT	11.774m to 20d nail in northwest face up 0.374m scribed S23BT	9.716m to 20d nail in northeast face up 0.286m scribed S26BT

Steel Signpost
North
1.294m from
north flange
sign 54-4, 54-9

The corner fell 8.5 chains (170.5 m) West of the East edge of Alder/Aspen interface and 6.2 chains (125m) West of Cedar/Alder interface

The monument was measured up 0.151m.

Northern Lights Surveying and Mapping, Inc. Boy River Township Field Book #3, p. 13.

Coordinates:

Cass County North

Northing = 72469.985 meters
Easting = 163329.956 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 342460.281 meters
Easting = 813456.006 meters

Latitude = 47°10'52.32899" North
Longitude = 94°04'20.93616" West