


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner #14 on the south bank of the Boy River, east line of Section 31, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.


In September, 1998, North Lights Surveying and Mapping, Inc. found, re-monumented, and accepted the 1928 General Land Office (G.L.O.) survey meander corner position as a perpetuation of the original G.L.O. meander corner.

SKETCH OF REFERENCE TIES & EVIDENCE T.143N., R.27W.



NOT TO SCALE

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

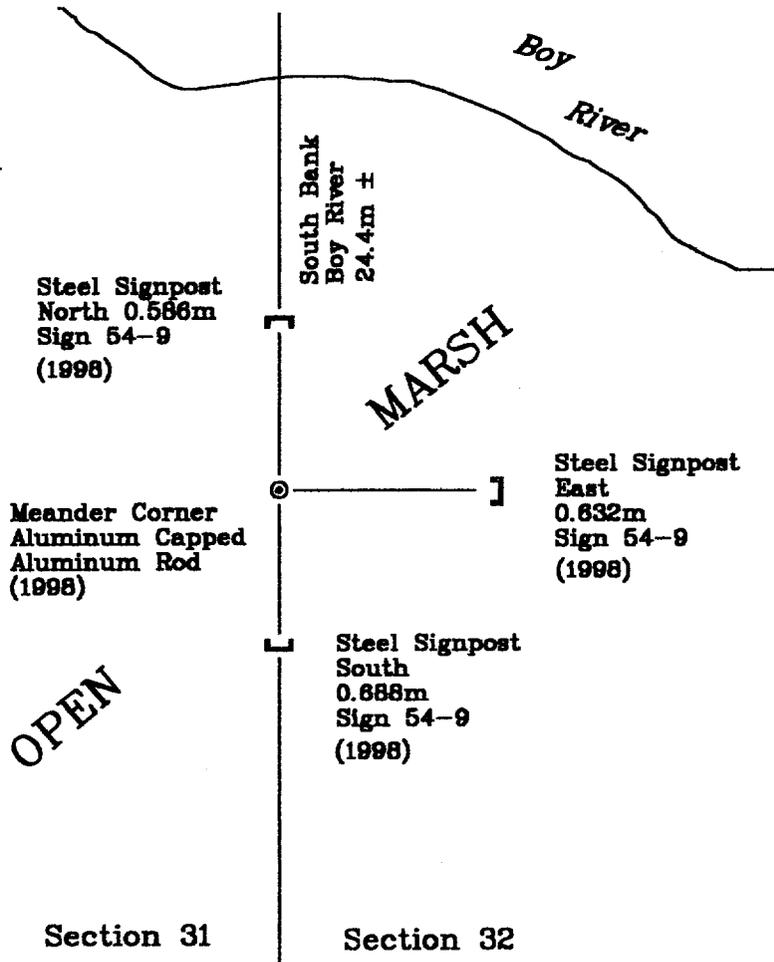

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Joseph Foster 6-2-99
Joseph Foster Date
Licensed Land Surveyor No. 25342
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413582
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 9:50 A.M. Date: 6-8-99
Recorder Claudine Kaylor
By K.J. Deputy
DOCUMENT NO. 413582

Statement of Evidence

Meander Corner #14 on the south bank of the Boy River, east line of Section 31, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the meander corner and referenced it with the following:

7" (0.178m) Tamarack	5" (0.127m) Tamarack
S5°E	S4°W
224 Links (45.062m)	232 Links (46.671m)

1928; G.L.O. resurvey notes; government crew set a 1"x36" (0.025mx0.914m) iron pipe with a brass cap at the proportionate distance, on the left bank of the Boy River. No references were established. A 3"x6" (0.076mx1.829m) cedar post was set alongside the pipe.

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

August 18, 1998, Northern Lights Surveying and Mapping, Inc. crew member Matt Brunner cruised to the meander corner location and conducted a search, but did not find the monument.

September 10, 1998; Northern Lights Surveying and Mapping, Inc. crew of Foster and Gerving returned to the corner location and found the 1928 monument bent, at the surface of a swamp. In the attempt to plumb the monument, the cap broke off; the crew then re-monumented the position with a 4.572m long, 0.019m diameter aluminum rod with a 0.083m diameter aluminum stamped cap, up 0.120m, and established the following references:

Steel Signpost	Steel Signpost	Steel Signpost
North	East	South
0.586m	0.632m	0.688m
Sign 54-9	Sign 54-9	Sign54-9

The distances were measured from the center of the signposts. The 1928 monument shaft was placed adjacent to the 1998 aluminum rod, south side, flush with the water.

The south side of the Boy River lay northerly approximately 24.4m±.

Northern Lights Surveying and Mapping, Inc. Boy River Township Field Book #4, pp.27-29.

Coordinates:**Cass County North**

Northing = 70475.819 meters
Easting = 158461.558 meters

**State Plane Coordinate System
Minnesota Central Zone
NAD 83**

Northing = 340484.220 meters
Easting = 808588.571 meters

Latitude = 47°09'47.98461" North
Longitude = 94°08'12.23896" West