


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness corner to the North Quarter Corner, Section 32, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

On August 17, 1998, Northern Lights Surveying and Mapping, Inc. found the 1970 United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) concrete monument and accepted it as the perpetuation of the original General Land Office (G.L.O.) witness to the Quarter Corner.

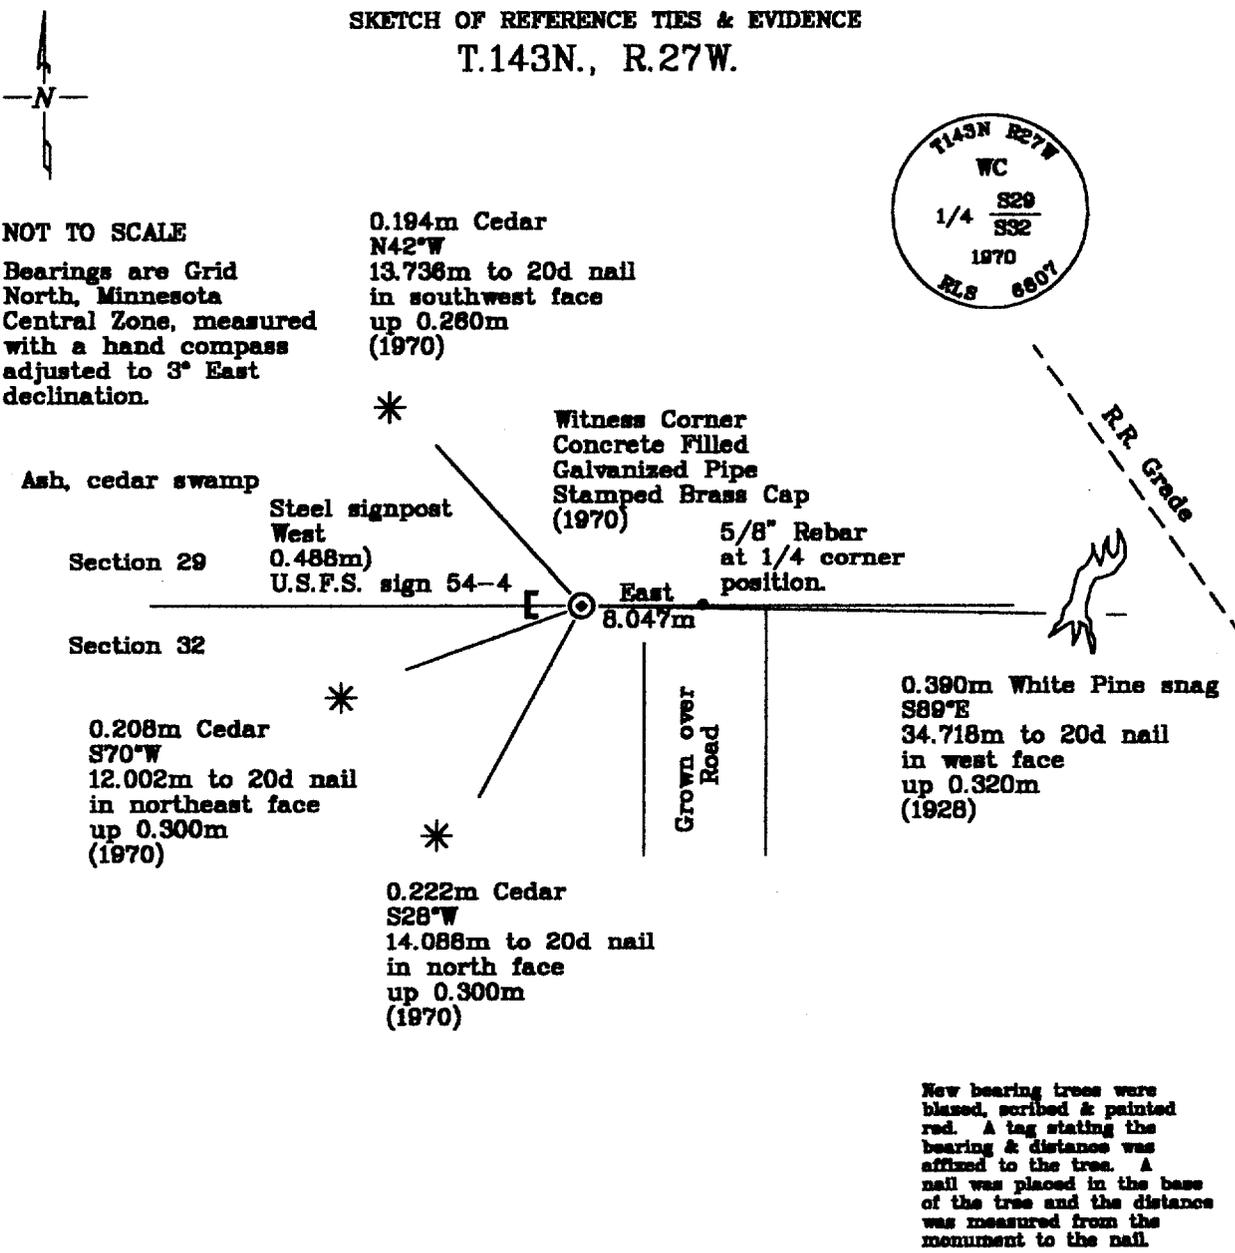

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

Joseph Foster 6-2-99
Joseph Foster Date

Licensed Land Surveyor No. 25342
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413583
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 9:55 A.M. Date: 6-8-99

Recorder Claudine Kaylor

By K.F., Deputy

DOCUMENT NO. 413583

Statement of Evidence

page 2 of 3

North Quarter Corner, Section 32, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

10" (0.254m) Birch	8" (0.203m) Birch
S30°E	N28°E
10 Links (2.012m)	13 Links (2.615m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

April, 1903; United States Army Corps of Engineers Survey Field Book #358, p.16, on file with National Archives Regional Office, Chicago, Illinois; B.E. Trask found the original G.L.O. wooden post standing with both Birch references dead, but also standing.

1928: G.L.O. resurvey notes: survey crew found nothing. They accepted testimony by local landowners that the corner lie under the CL of the road. They then witnessed the quarter corner 26.4 feet west of the true 1/4 corner position with an iron post 3 feet (0.914m) x 1" (0.025m) with a cap marked:



The following references were established:

14" (0.356m) White Pine	3" (0.076m) Tamarack
S89°E	N3°W
174 Links (34.991m)	31 Links (6.248m)

September, 1970; U.S.D.A.-F.S. T.143N., R.27W. Field Book #1, P.74; Curt Krause, under direction of William Okerman, R.L.S. No. 6807, searched and found the following:

21" (0.533m) White Pine	6" (0.152m) Tamarck stump
S89°E	N3°W
114.80 Feet (34.991m)	20.50 Feet (6.248m)
Scribe overgrown (1928)	Scribed BT (1928)

Krause could not find the iron pipe. He noted that the true quarter corner fell 26.4 feet (8.047m) east of the witness corner. He set a 2" (0.051m) diameter galvanized steel pipe 5 feet (1.524m) long filled with concrete and capped with a 3" (0.076m) brass stamped tablet, and referenced with:

7" (0.178m) Cedar	8" (0.203m) Cedar	7" (0.178m) Cedar	Steel Signpost West
N42°W	S70°W	S28°W	
45.0 Feet (13.716m)	39.4 Feet (12.009m)	46.6 Feet (14.204m)	1.6 Feet (0.488m)
Scribed WC 1/4 S29BT	Scribed WC1/4 S32BT	Scribed WC1/4 S32BT	U.S.F.S. sign 54-4

September, 1975; Certificate of Location of Government Corner (Document # 223549) filed by William Okerman, R.L.S. No. 6807, with Cass County Recorder's Office, Walker, for the above 1970 information.

August, 1997; U.S.D.A.-F.S. T.143N., R.27W. Field Book #1, p. 74; Rob Main and Curt Krause found the monument, bearing trees, and signpost in place. He noted the following:

7" Cedar now 11" (0.279m)
8" Cedar now 12" (0.305m)
7" Cedar now 10" (0.254m)

Statement of Evidence

page 3 of 3

North Quarter Corner, Section 32, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

Also, the 1928 White Pine was visible; no bearing or distance was noted. They noted that the corner fell in an ash and cedar swamp approximately 250 feet (76.200m) west of a woods trail.

August 17, 1998; Northern Lights Surveying and Mapping, Inc. found the 1970 concrete monument in place and maintained the corner, updating the following references:

0.390m White Pine snag S89°E 34.718m to 20d nail in west face up 0.320m (1928)	0.222m Cedar S28°W 14.088m to 20d nail in north face up 0.300m (1970)	0.208m Cedar S70°W 12.002m to 20d nail in northeast face up 0.300m (1970)	0.194m Cedar N42°W 13.736m to 20d nail in southwest face up 0.260m (1970)
---	--	--	--

Steel Signpost
West
1.8 Feet (0.488m)
U.S.F.S. sign 64-4

November, 1998; Northern Lights Surveying and Mapping, Inc. crew of Leuelling and Heinle placed 0.864m long 5/8" capped rebar at the location of the true 1/4 corner. The rebar is East 28.40' (8.047m) from the witness corner.

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #3, p.67.

Coordinates:

WC to Quarter Corner
Cass County North
Northing = 70919.872 meters
Easting = 159258.758 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340908.382 meters
Easting = 809385.563 meters
Latitude = 47°10'02.32828" North
Longitude = 94°07'34.36714" West

Quarter Corner
Cass County North
Northing = 70920.032 meters
Easting = 159266.805 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340908.746 meters
Easting = 809393.609 meters
Latitude = 47°10'02.33966" North
Longitude = 94°07'33.98508" West