

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 140, Range 28, 5TH P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 3/22/00 found a 1920 BEARING TREE
DATE

left monument as found, lowered monument, removed monument (explain)

On 3/22/00 Placed a 2" X 5' IRON PIPE, 62' NORTH OF CL
DATE
MOUTH OF OUTLET FROM LAKE

SKETCH OF REFERENCE TIES

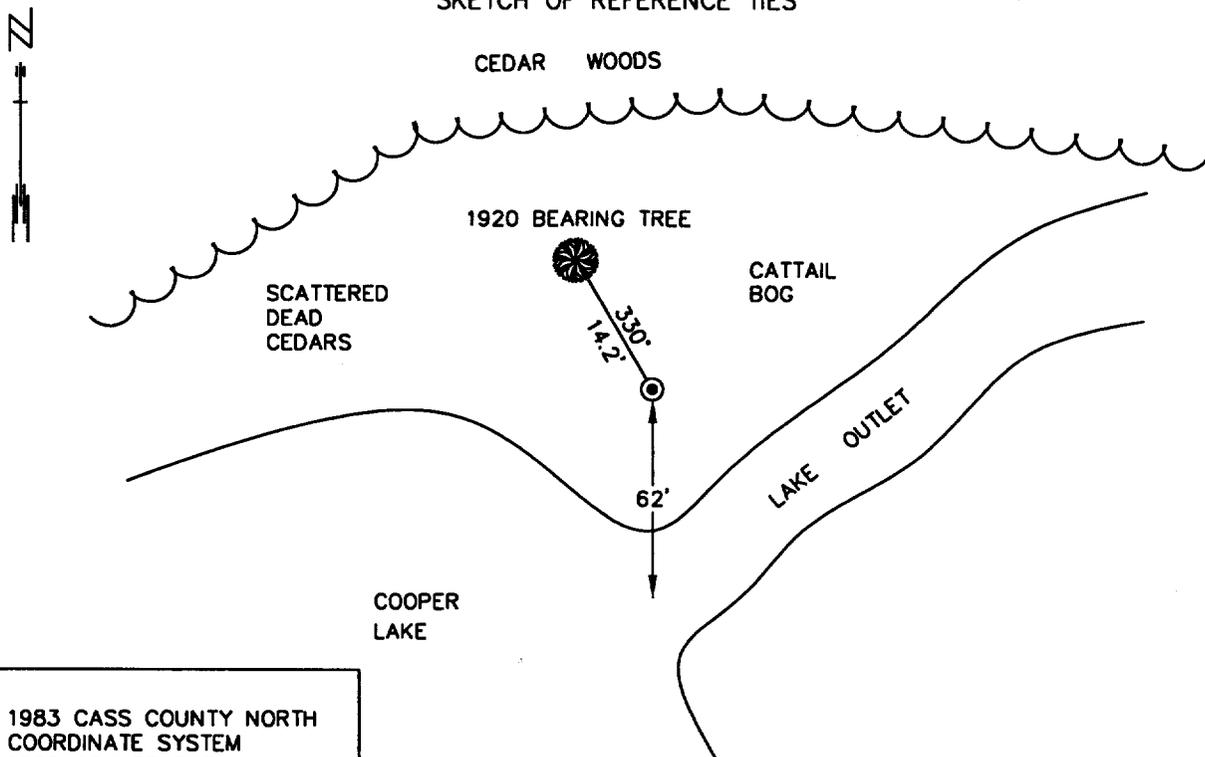

1983 CASS COUNTY NORTH
COORDINATE SYSTEM
1996 ADJUSTMENT
N = 160977.87
E = 505748.00

AZIMUTHS ARE OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

11/9/00
FOM 01869

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 11/22/00
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER # 430973
County of Cass

I hereby certify that this document was filed in the Co. Recorders Office at 2:40 P.M. on the 28th day of Nov. A.D., 2000

County Recorder Claudia Kaylar
By _____, Deputy

DOCUMENT NO. 430973

East Quarter Corner Section 3, Township 140 North, Range 28 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying
AMI Surveyors and Mappers

- 1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:
Cedar 9" N 30° W 17 links (11.22')
Cedar 5" S 80° E 26 links (17.16')
- 1917 Ben Clark found 3" post.
- 1920 Ben Clark found old Govt. post and bearing trees. Took another bearing tree: 6" Cedar N 30°W 14.2'. He set 3" x 30" iron pipe with cap.
- 1941 Civilian Conservation Corp. found an iron pipe and Cedar bearing tree N 30°W 17 links.
- 1977 Walt Curo surveyed some tracts in the northwest quarter of Section 2 for Averbeck. His field notes show a Cedar BT at the corner.
- 2000 In March, the DNR survey crew searched for the corner and bearing trees. Found a 12" Cedar tree with an open blaze and scribing and a 2 1/2" x 30" iron pipe laying down in the swamp. This tree was assumed to be the 1920 BT and a 2" inside diameter x 5' galvanized iron pipe was set at S 30°E 14.2' from the tree, 1' above surface of bog.
Northeast Corner Section 10 - S 01°02'22"W 2715.11'
Northeast Corner Section 3 - N 01°55'40"W 2633.77'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401