


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 21, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 5/3/00 Placed a 3/4" X 24" IRON ROD WITH DNR SURVEY MARKER CAP, DOWN
0.3' ON CL E-W GRAVEL RD & 4' W OF CL GRAVEL RD S.

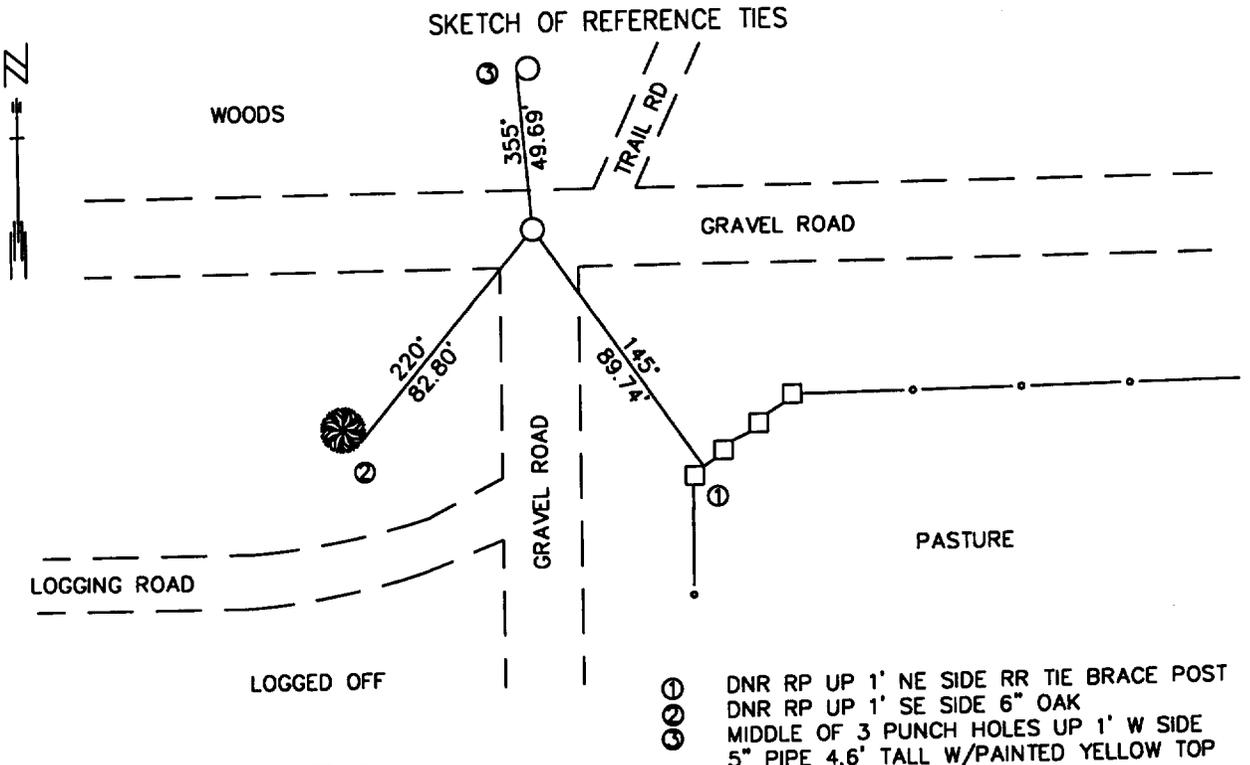

1983 CASS COUNTY SOUTH
 COORDINATE SYSTEM
 N= 225153.85
 E= 436736.37

AZIMUTHS OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page. JULY 2000
FOM01868

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James D. Walker 4/3/01
 SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER 434530
 County of Cass

I hereby certify that this document was filed in the Co. Recorders Office at 2:45 P .M. on the 11th day of April A.D., 2001

County Recorder Kathryn M. Norby
 By K.J. Deputy

DOCUMENT NO. 434530

Northeast Corner Section 21, Township 135 North, Range 32 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
 Cass County Surveyor
 Widseth, Smith and Nolting of Brainerd
 Landecker and Associates of Pequot Lakes
 Landecker and Associates of Walker
 Central Minnesota Surveying

- 1866 In October, the US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:
 Black Pine 8" N 59° E 136 links (89.76')
 Black Pine 8" N 4° W 149 links (98.34')
 Black Pine 6" S 29.5° W 195 links (128.7')
- 1915 R.E. Bryant set corner from Black Pine Bearing tree stump: 8" N 4° W 149 links.
- 1915 E.B. Horst set 1 ½" x 48" iron monument for corner set by Bryant. The following new bearing trees:
 Jack Pine 9" SW 36.6'
 Jack Pine 9" SE 61.1'
 Jack Pine 8" N 51° E 97'
 Jack Pine 9" N 39° W 82.8'
- 1920 E.B. Horst found iron monument from previous survey. He measured 2612.9' to the North Quarter Corner of Section 21 and 2673.1' to the North Quarter Corner of Section 22.
- 1985 Cass County Surveyors office found a 1 ½ " iron pipe and the stump of a 1915 bearing tree: Jack Pine 9" N 39° W 82.8'. Took three new bearing trees.
- 1987 Walter E. Curo, Cass County Surveyor, filed a Certificate of Location of Government Corner on the iron pipe found in 1985. The certificate states the iron pipe was replaced with a County cast iron monument down 8".
- 2000 In May, the DNR survey crew searched for the corner and ties from the 1987 certificate. The east-west road has been redone and the cast iron monument and ties are gone. The Quarter Corners east and west were found and a location for the corner was proportioned from the 1920 survey. From this position the center of a stump was found at N 38°43'06"W 83.52'. The 1915 distance was probably measured to the face of the tree making a distance of 83.2' to the center of the tree which agrees within 0.3' of our distance. Accepted this position as the obliterated location of the corner and set a 3/4" x 24" iron monument with a MN DNR SURVEY MARKER top, down .3'.
 North Quarter Corner Section 21 - S 89°16' 30"W 2612.09'
 North Quarter Corner Section 22 - N 89°46' 14"E 2672.28'
 East Quarter Corner Section 16 - N 00°18' 47"W 2647.19'
 East Quarter Corner Section 21 - S 00°44' 09"E 2662.82'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401