

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

[Signature]

Date: 9/6/01 License No: 21367

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 10:45 o'clock A.M. on the 10th day of Sept., 20 01 A.D.

County Recorder Kathryn M. Norby

By: John F. Mauden, Deputy  
DOCUMENT NO. 440135

NORTHEAST CORNER Corner of Section 32, Township 142 N, Range 31 W, 5TH P.M.

On 5/10/01 found a 2" IRON PIPE UP 2.9' IN COLLAR OF STONE

left monument as found,  lowered monument,  removed monument (explain)


On 7/27/01 placed a 2" STAMPED ALUMINUM CAP ON FOUND IRON PIPE

decl: 5° E (ASSUMED)

## SKETCH OF REFERENCE TIES

Not to Scale

LAT. 47° 05' 04.2566"  
LONG. 94° 37' 07.7226"

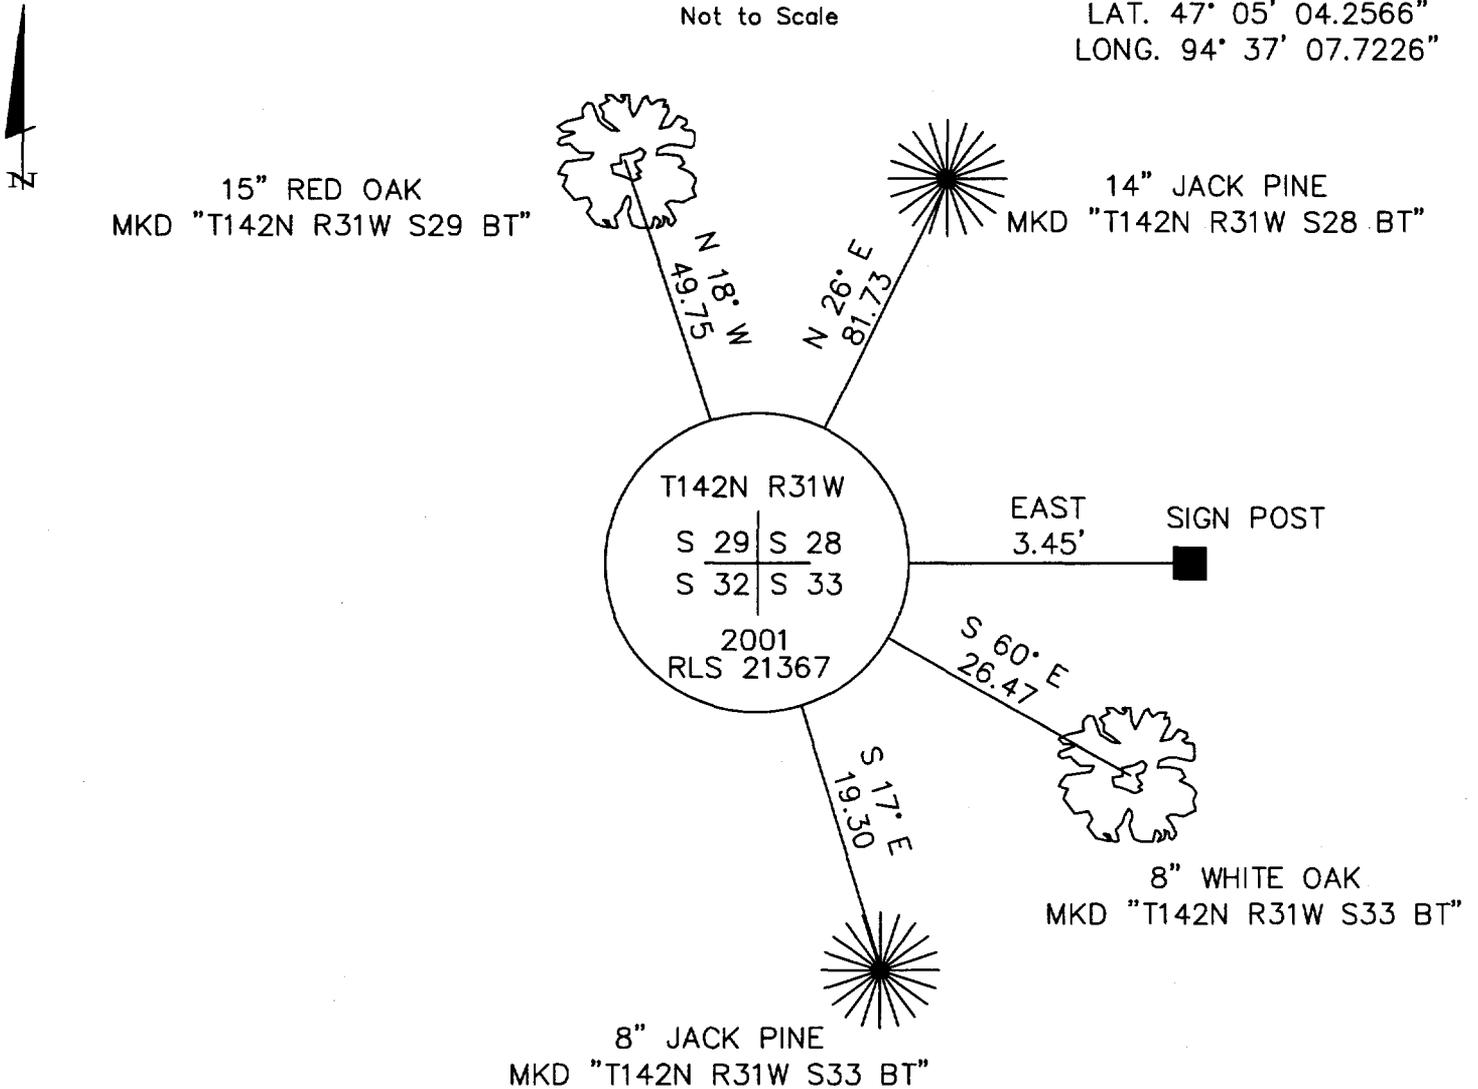

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. V - 9

Northeast corner, Section 32, Township 142 North, Range 31 West, Cass County, Minnesota

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 142 North, Range 31 West. A wood post was set to mark the corner position with the following witnesses: A 5" Poplar, North 80 degrees East, 15 links; a 3" Poplar, North 13 degrees West, 17 links; a 3" Poplar, South 25 degrees West, 8 links; a 36" White Pine, South 57 degrees East, 81 links.

1911 County Survey Record Book "A", p. 388 - 389, shows a survey by John Curo, Cass County Surveyor, he set a 2" x 48" capped galvanized iron pipe from old Government BT's.

1915 County Survey Record Book "C", p. 511, shows a survey by John Curo. He found iron monument and S.E. B.T.

1915 County Resurvey plat by John Curo, Cass County Surveyor, resurvey of Section 28.

1917 County Survey Record Book "C", p. 122, shows a survey by E. B. Horst. He found iron monument at corner.

1919 County Survey Record Book "C", p. 498, shows a survey by E. B. Horst. He found an iron monument.

1919 County Resurvey plat by E. B. Horst. Resurvey of Section 32.

1925 County Resurvey plat by John Greene. Resurvey of Section 32.

1988 C. Krause, R. Main, U.S. Forest Service, found 2" x 6" iron pipe set by Cass County. Monument is 2.9' above ground in mound of rock from which the following accessories: A 15" Red Oak, North 18 degrees West, 49.75 feet, MKD T142 N, R31 W, S29 BT; a 14" Jack Pine, North 26 degrees East, 81.73 feet, MKD T142 N, R31 W, S28 BT; a 8" White Oak, South 60 degrees East, 26.47 feet, MKD T142 N, R31 W, S33 BT; an 8" Jack Pine, South 17 degrees East, 19.30 feet, MKD T142 N, R31 W, S33 BT; an angle iron fence corner South 1 degree West, 20.0 feet; an 8' steel sign post, 3.45 feet East corner at south edge of old township road north and west.

2001, a Landecker & Associates, Inc. survey crew found a 2" iron pipe in collar of stone and accessories as noted by U.S. Forest Service recovery of 1988 and accepts the corner as a perpetuation of the original corner position. A stamped cap was attached.