

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 3, Township 134 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 12-1-98 found a Corner Fence Post with very old Barbed wire  
DATE  
North and Woven Wire South West
  - left monument as found,
  - lowered monument,
  - removed monument (explain)
- On 12-1-98 Placed a 3/4" x 24" Iron Rod with "MNDNR SURVEY  
DATE  
MARKER" cap at East Base C.F.P.

SKETCH OF REFERENCE TIES

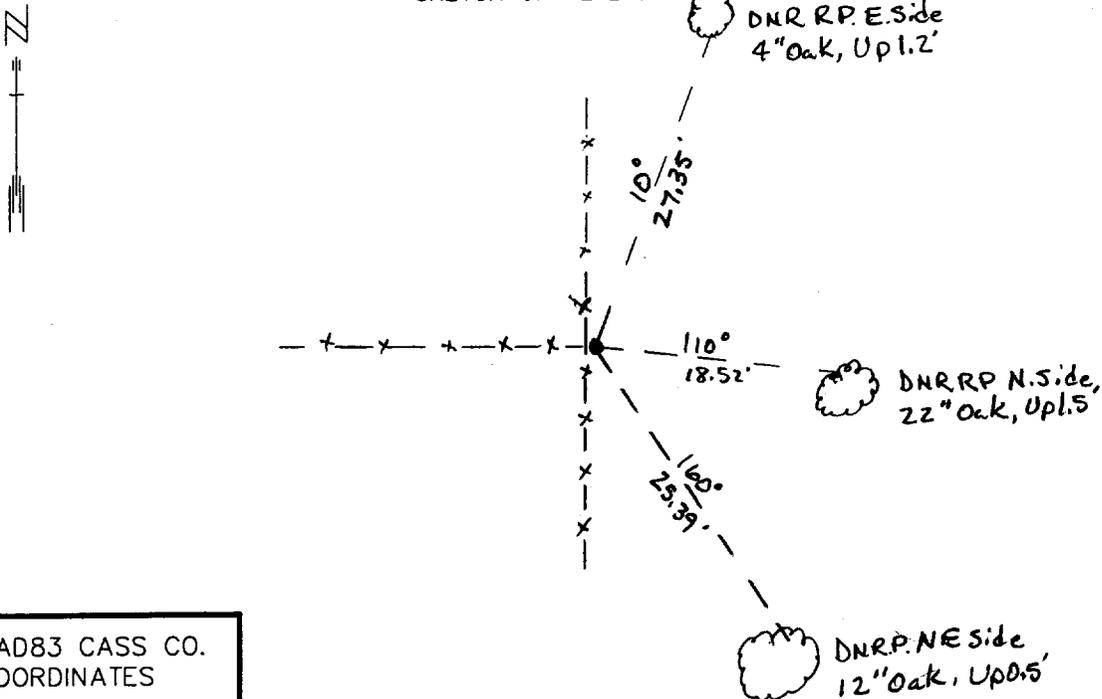

NAD83 CASS CO.  
COORDINATES

N 209,344.36

E 476,199.44

Abstract Document  
#441833

Statement of evidence relative to this corner location is on back of page.

DATE  
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Waller 5/31/01  
SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:06 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Norby  
By John F. Mader, Deputy  
DOCUMENT NO. 441833

**Northeast Corner Section 3, Township 134 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1858 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Birch 6" N 61° W 22 links  
Birch 8" S 60° E 36 links  
Birch 8" N 71° E 29 links  
Birch 8" S 28° W 37 links

1912 John Curo, Cass County Surveyor found a stake and the stump of the southeasterly bearing tree and the roots of the other three trees. He set new stake to mark the corner and marked the following new bearing trees:

Oak 8" S50°E 11.5 feet  
Birch 8" S15°W 27.72 feet

1998 The DNR survey crew found a corner fence post with fences running west, south and north. The fence was accepted as marking the best location for the corner. A MNDNR Survey Marker was set at the east base of the corner fence post to mark the corner.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425