

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 11, Township 135 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 7-8-98 found a 1 1/2" CAPPED IRON PIPE UP 2' IN WOODS.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ Placed a _____
DATE

SKETCH OF REFERENCE TIES

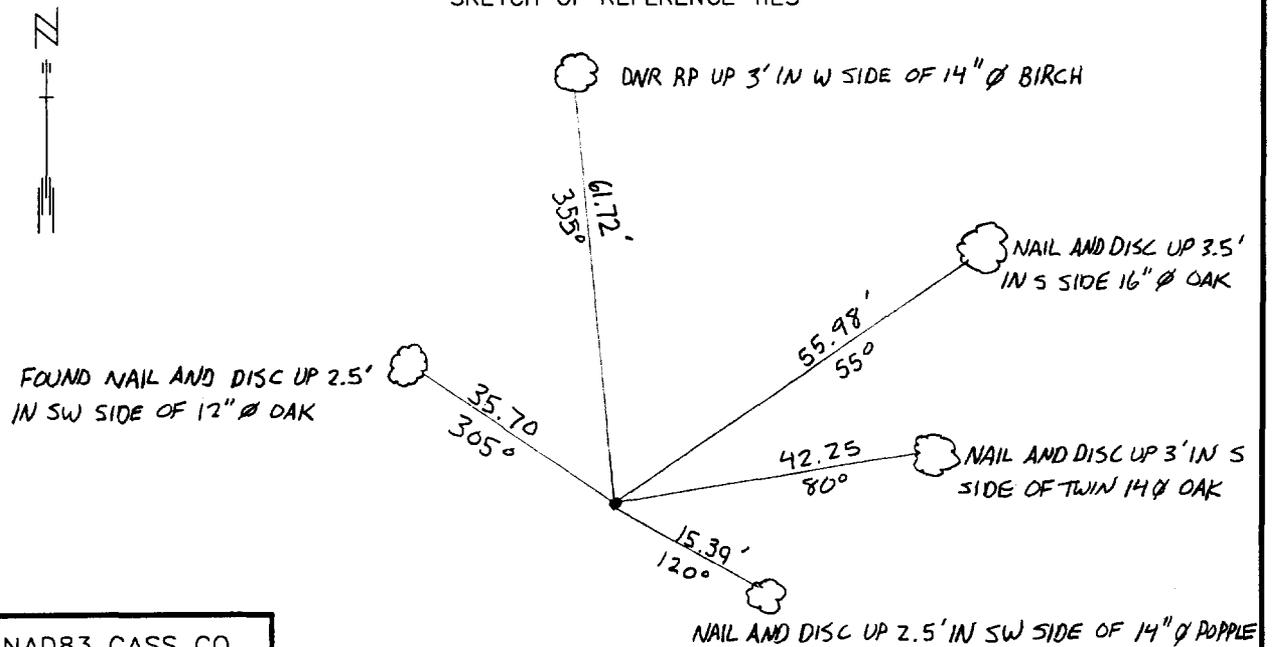

NAD83 CASS CO.
COORDINATES

N 235,904 ±
E 481,527 ±

Corner not Traversed to, only Computed from Donald Coulter's Survey.

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

DATE
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3/3/01
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:14 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Norley
By John F. Maeder, Deputy
DOCUMENT NO. 441837

Northeast Corner Section 11, Township 135 North, Range 31 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying

1858 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Aspen 11" S 11° W 14 links
Aspen 12" N 50° E 20 links
Aspen 6" S 63° E 30 links
Blk. Oak 10" N 54° W 9 links

1971 Donald Coulter worked on sections 10 - 15 for a plat of Wilderness Park. He set a 1 1/4" iron pipe to mark the corner. He took ties to three oaks, a poplar and a birch.

1998 The DNR survey crew found the 1 1/4" capped iron pipe, up 24", and the five tie trees taken by Coulter. This corner was not included in our traverse work or located by GPS. The coordinates for this corner was computed from Coulter's information.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425