

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 29, Township 135 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 2/12/98 Placed a spike at centline-centline old Roads North
- & West. 7/98 Replace spike with 3/4" x 24" Iron Rod with "MNDNR" cap

SKETCH OF REFERENCE TIES

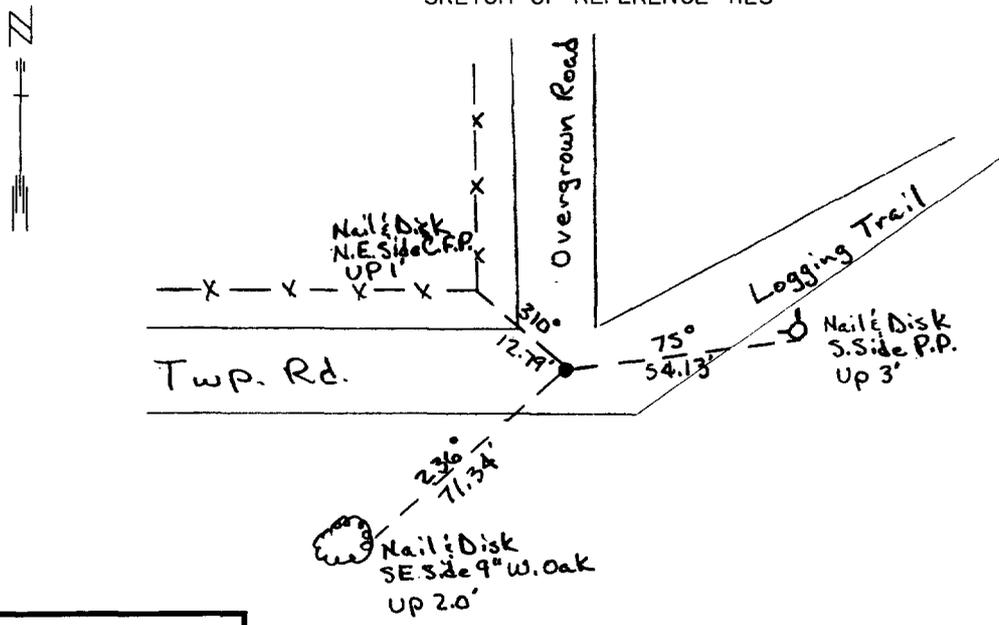

NAD83 CASS CO.  
COORDINATES

N 220084.16

E 465620.15

Abstract Document #441851

All Azimuths observed with Compass

Statement of evidence relative to this corner location is on back of page.

DATE 10/28/99  
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under

my direct supervision.

John D. Wilcox 5/31/01

SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:42 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Norby

By John E. Maeder, Deputy

DOCUMENT NO. 441851

**Northeast Corner Section 29, Township 135 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Elm 12" N 57° E 85 links  
Elm 8" S 84° W 57 links  
Elm 7" N 53° W 23 links  
Ash 6" S 64 ½° E 87 links

1998 The DNR survey crew searched for this corner at the intersection of old roads west and north. No monument was found. A MNDNR Survey Marker was set at the intersection and was accepted as the obliterated location of the corner.

Northeast Corner Section 28 bears S 89°47'35" E 5333.76'  
Northeast Corner Section 30 bears S 89°24'21" W 5346.17'  
Northeast Corner Section 20 bears N 00°39'15" W 5350.07'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425