

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 35, Township 135 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 6-15-98 Placed a DSM UP 0.2 IN WOODS WITH A RIB STICK  
DATE

### SKETCH OF REFERENCE TIES

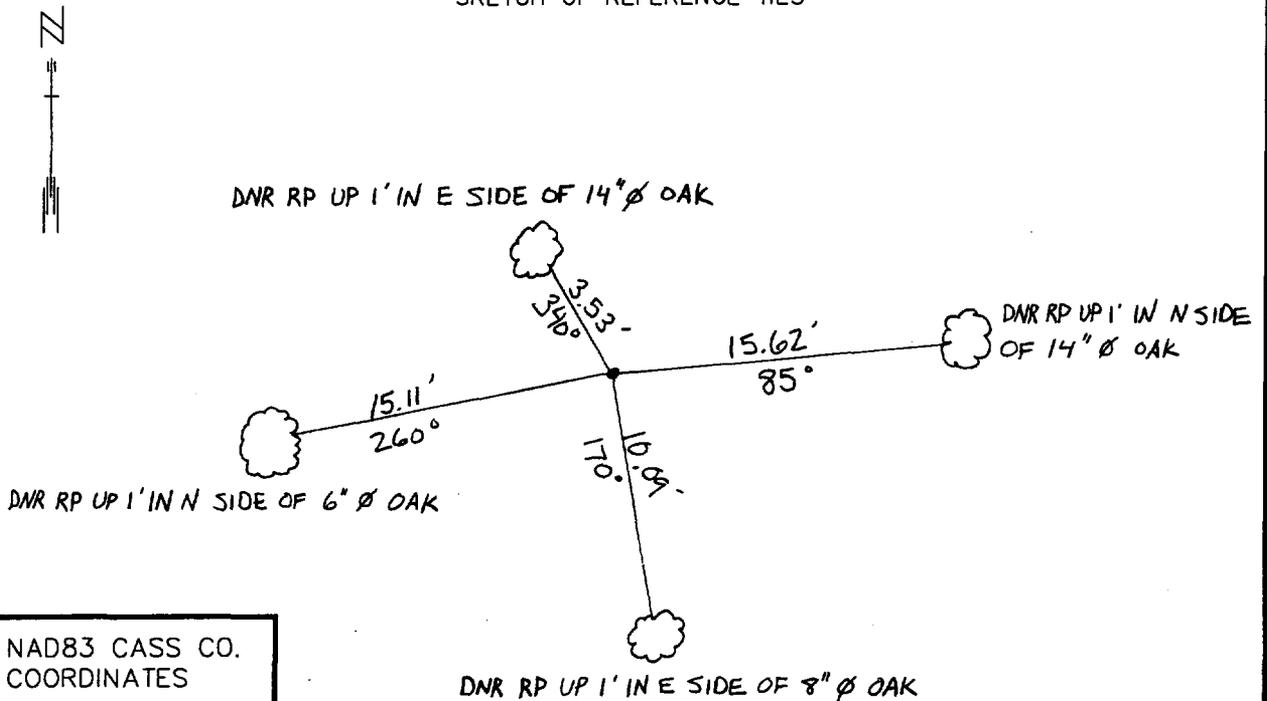

NAD83 CASS CO.  
COORDINATES

N 214,711.24  
E 481,528.37

Abstract Document  
#441861

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

DATE  
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under

my direct supervision.

John D. Walker 5/31/01  
SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. recorders office at 3:02 P.M. on the 16th day of Oct. A.D., 2001

County Recorder, Kathryn M. Norby  
By John F. Maeder, Deputy

DOCUMENT NO. 441861

**Northeast Corner Section 35, Township 135 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Aspen 14" N 74° E 31 links  
Aspen 10" S 34° E 53 links  
Blk. Oak 7" S 44 ½° W 49 links  
Maple 8" N 57 ½° W 65 links

1998 The DNR survey crew searched for evidence of the corner. Nothing was found. The section corners to the north, south, east and west were found and a double proportioned position was computed and searched without results. A MNDNR Survey Marker was set to mark the double proportioned location of the corner. The corners used for the double proportion are:

Northeast Corner Section 36 - S 89°44'42"E 5292.51'  
Southeast Corner Section 35 - S 00°06'47"E 5313.88'  
Northeast Corner Section 34 - N 89°53'17"W 5267.36'  
Northeast Corner Section 26 - N 00°35'19"W 5313.88'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425