


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.


TERRY L. FREEMAN

Date: 11/1/01 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 2:15 o'clock P.M. on the 1st day of Nov., 20 01 A.D.

County Recorder Kathryn M. Norby
By: John F. Maeder, Deputy
DOCUMENT NO. 442505

NORTH QUARTER Corner of Section 23, Township 141, Range 31, 5TH P.M.

On _____ found a _____

left monument as found, lowered monument, removed monument (explain)


On 8/22/01 placed a 2" X 48" IRON PIPE WITH STAMPED BRASS CAP UP 12"

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

LAT. 47° 01' 28.2092"
LONG. 94° 33' 58.3636"
NAD 83 (1996)

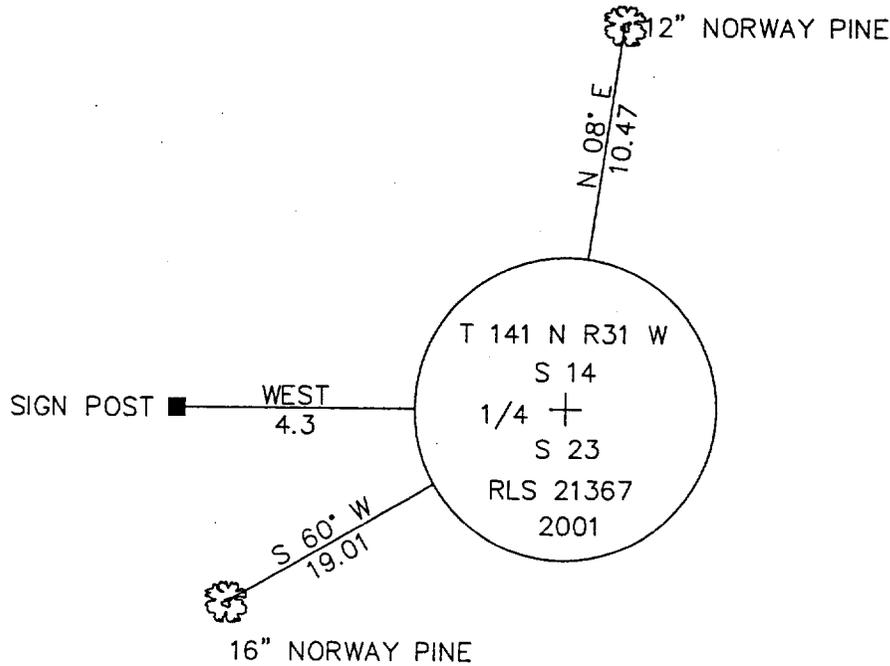

THE BEARING TREES ARE SCRIBED, PAINTED WITH RED ENAMEL AND MARKED WITH BT TAGS.

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. N - 19

North Quarter corner, Section 23, Township 141 North,
Range 31 West, Cass County, Minnesota

1873 P.H. Conger, U.S. Deputy Surveyor, originally set this corner position while subdividing Township 141 North, Range 31 West. A wood post was set to mark the corner position with the following witnesses: An 8" Yellow Pine, South 75 degrees West, 29 links; a 12" Jack Pine, North 3 degrees West, 38 links. Notes are filed in the Secretary of State's office with a copy in the County Surveyor's office.

1907 County Survey Record, Book B, Page 339, shows a survey by John Curo. He found the $\frac{1}{4}$ corner. This record refers to prior work by County Surveyor Canfield.

1962 Robert H. McDonald, U.S.F.S. Surveyor, found F.S. metal location poster on 16" Red Pine put up by Moore in 1936 saying Quarter corner is North 74 degrees East, 7 links. Notes are found in Book 1 of 5 of Township 141 North, Range 31 West, page 36 in the U.S.F.S. office in Cass Lake.

2001 August 22, a Landecker & Associates, Inc. survey crew searched for the corner. Corner falls in pine plantation. They found no evidence of corner or witnesses. A 2" x 48" galvanized iron pipe with stamped brass cap was set at the lost position, midpoint between the Northeast and Northwest corners with the witnesses as shown on front of this certificate.