

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Clayton J. [Signature]

Date: 1/29/03 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 9:15 o'clock A.M. on the 29th day of January, 2003 A.D.

County Recorder Kathryn M. Norby

By: John F. Maeder, Deputy
DOCUMENT NO. 461719

EAST QUARTER Corner of Section 32, Township 143, Range 25, 5TH P.M.

On 10/15/01 found a 6" CONCRETE CYLINDER WITH BRONZE CAP

left monument as found, lowered monument, removed monument (explain)


On _____ placed a _____

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

LAT. 47° 09' 27.4773"
LONG. 93° 51' 33.7291"

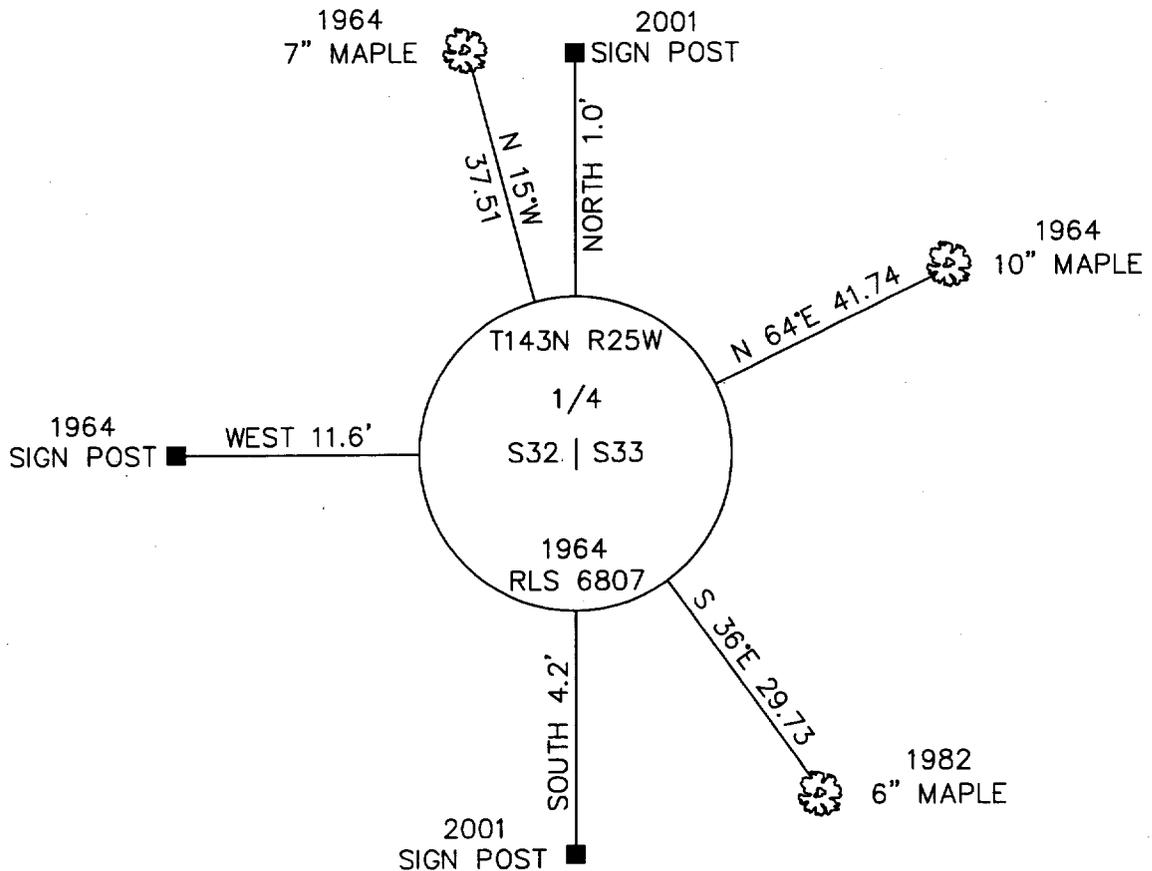

THE BEARING TREES ARE SCRIBED, PAINTED WITH RED ENAMEL AND MARKED WITH BT TAGS.

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. X-9

East Quarter Corner, Section 32,
Township 142 North, Range 25 West

1872 Hayward and Griffin, U.S. Deputy Surveyors, originally established this corner position while surveying the interior subdivision lines of Township 143 North, Range 25 West. A wood post was set to mark the corner position with the following witnesses: A 8 inch Birch, North 80 degrees East, 17 links; a 8 inch Birch, South 39 degrees West, 11 links.

1924 County Survey Record Book "D", p. 132, shows a survey by James Flynn. He found original bearing trees and set a post about 2 feet East of wagon rut with the following witnesses: A 6 inch post, West 33 feet; a 6 inch post East, 33 feet.

1936 U.S. Forest Service CCC records show, A. H. Jager found Cedar post in good condition. Found witnesses as described. Placed Forest Service Location tag on Cedar post to East.

1960 DNR Engineering found 2 wood posts about 66.5 feet apart. Appears that ¼ corner should be between them. Notes are on file at Cass County Surveyor's Office.

1964 William H. Okerman, RLS#6807, found remains of a survey by James Flynn. He set a 6 inch diameter concrete monument, capped with a 3 inch bronze tablet, with the following witnesses; a 5 inch Maple, North 15 degrees West, 37.7 feet; a 5 inch Oak, South 17 degrees West, 41.1 feet; a 8 inch Maple, North 64 degrees East, 41.8 feet; a steel sign post, West, 11.6 feet. Notes are on file with the U.S. Forest Service in Cass Lake, Minnesota and as Affidavit as to location of Government Corner #360 in the Cass County Recorder's Office.

1976 Dependent Resurvey of a portion of the subdivisional lines of Township 143 North, Range 25 West by Bureau of Land Management. They found a 6 inch cylindrical concrete post, with bronze cap and accepts as perpetuation of original corner position. Copies of this survey are on file in the Cass County Surveyor's Office.

1978 Gary H. Stevenson, RLS#12686 found 6 inch cylindrical concrete post with bronze tablet. Notes are on file at Landecker & Associates Inc. Walker Office.

1982 Ken Whitehorn RLS#14677 and U.S. Forest Service Survey Technician Glenn Kosenko found 6 inch concrete cylinder with 2 ½ inch cap and added the following witness: A 4 inch Red Maple, South 36 degrees East, 29.73 feet. Notes on file with the U.S. Forest Service in Cass Lake, Minnesota.

2001 October 15, a Landecker & Associates, Inc. survey crew found a 6 inch concrete cylinder with a 2 ½ inch bronze tablet marked as shown and accepts the corner as a perpetuation of the original corner from which the following accessories: A 7 inch Maple, North 15 degrees West, 37.51 feet; a 10 inch Maple, North 64 degrees East, 41.74 feet; a 6 inch Maple, South 36 degrees East, 29.73 feet; a steel sign post, West 11.6 feet; a steel sign post, South 4.2 feet; a steel sign post, North, 1.0 feet.