


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

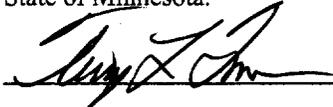

Date: 4/11/03 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:15 o'clock P.M. on the 17th day of April, 2003 A.D.

County Recorder Kathryn M. Morby

By: de, Deputy
DOCUMENT NO. 465199

EAST QUARTER Corner of Section 36, Township 139, Range 30, 5TH P.M.

On 2/18/03 found a 2 1/4" GALV. IRON PIPE WITH CAP UP 6"


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

decl: 5' EAST (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

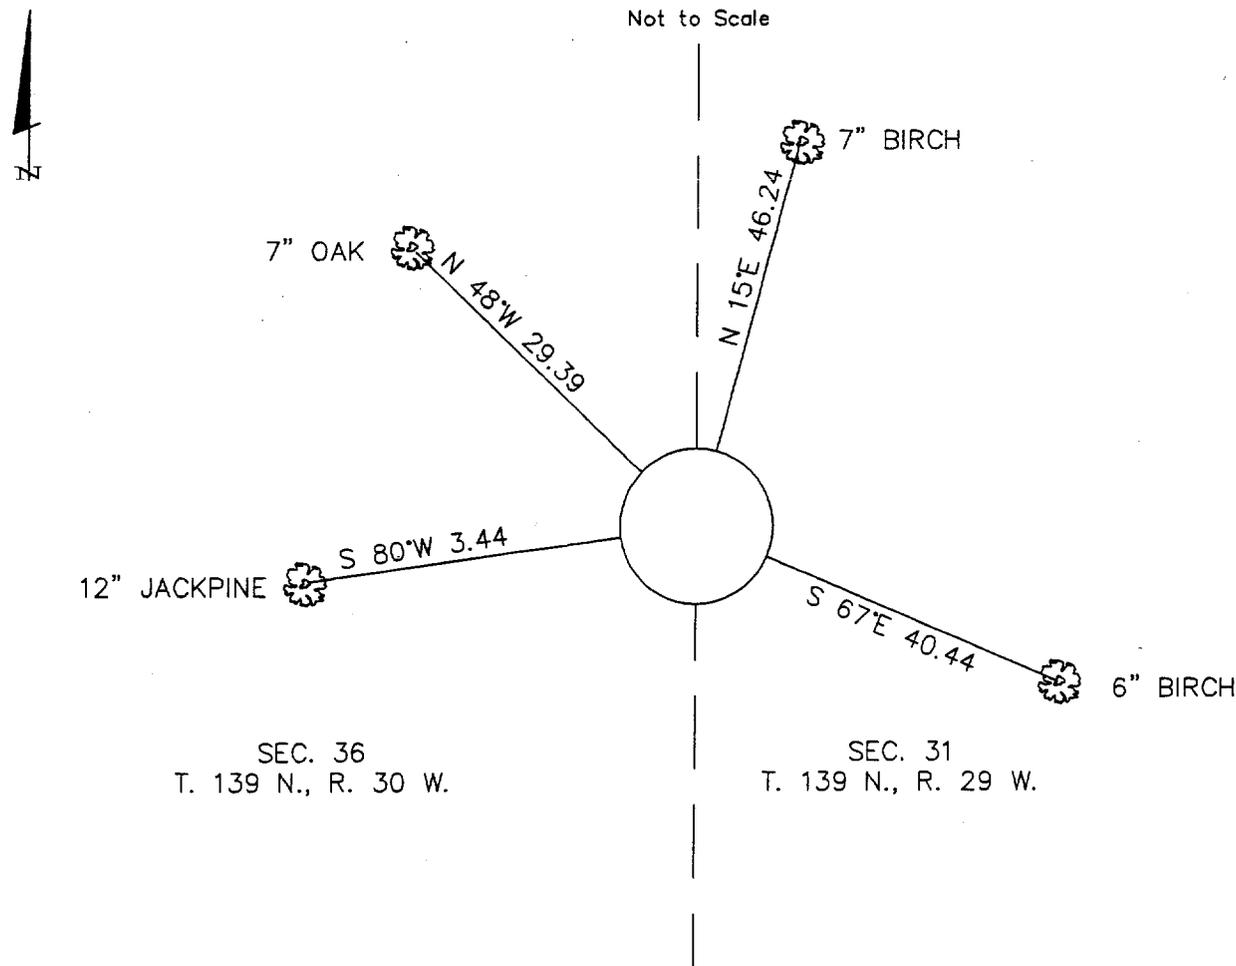

THE BEARING TREES WERE FOUND MARKED WITH BT TAGS AND NAILS AT BASE.

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

East Quarter Corner, Section 36 Township 139 North,
Range 30 West, Cass County, Minnesota

- 1865 Wright & Walker, U.S. Deputy Surveyors, originally established this corner position while surveying the East line of Township 139 North, Range 30 West. A wood post was set to mark the corner position with the following witnesses: A 5 inch Black Pine, North 42 degrees East, 47 links; A 5 inch Black Pine, North 57 degrees West, 13 links.
- 1913 County Survey Record Book "B", p. 301-304, shows a survey by M. A. Kemp. He found the original bearing trees and set a 30 inch x 38 inch Tamarack stake.
- 1915 County Survey Record Book "B", p. 354-360 shows a survey by H. F. Baldwin. He found the post and original bearing trees and set a 2 ¼ inch x 48 inch iron monument. Survey record also shows the East – West Quarter line of Section 31, Township 139 North, Range 29 West with the plat of CAMP BLANCHE lying north of said Quarter line.
- 2003 February 18, a Landecker & Associates, Inc. survey crew, while verifying the East – West Quarter line of Section 31, Township 139 North, Range 29 West, found a 2 ¼ inch galvanized iron pipe that fits the 1915 County Survey and accepts the corner as a perpetuation of the original corner from which the following accessories: A 7 inch Birch, North 15 degrees East, 46.24 feet; A 6 inch Birch, South 67 degrees East, 40.44 feet; A 12 inch Jack Pine, South 80 degrees West, 3.44 feet; A 7 inch Oak, North 48 degrees West, 29.39 feet.