


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 31, Township 139, Range 29  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 4/7/2003 found a CIM base 3.5' below surface  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On 4/7/2003 placed a 1/2' Iron pipe capped RLS 17253 at 0.2' below surface  
DATE

## SKETCH OF REFERENCE TIES

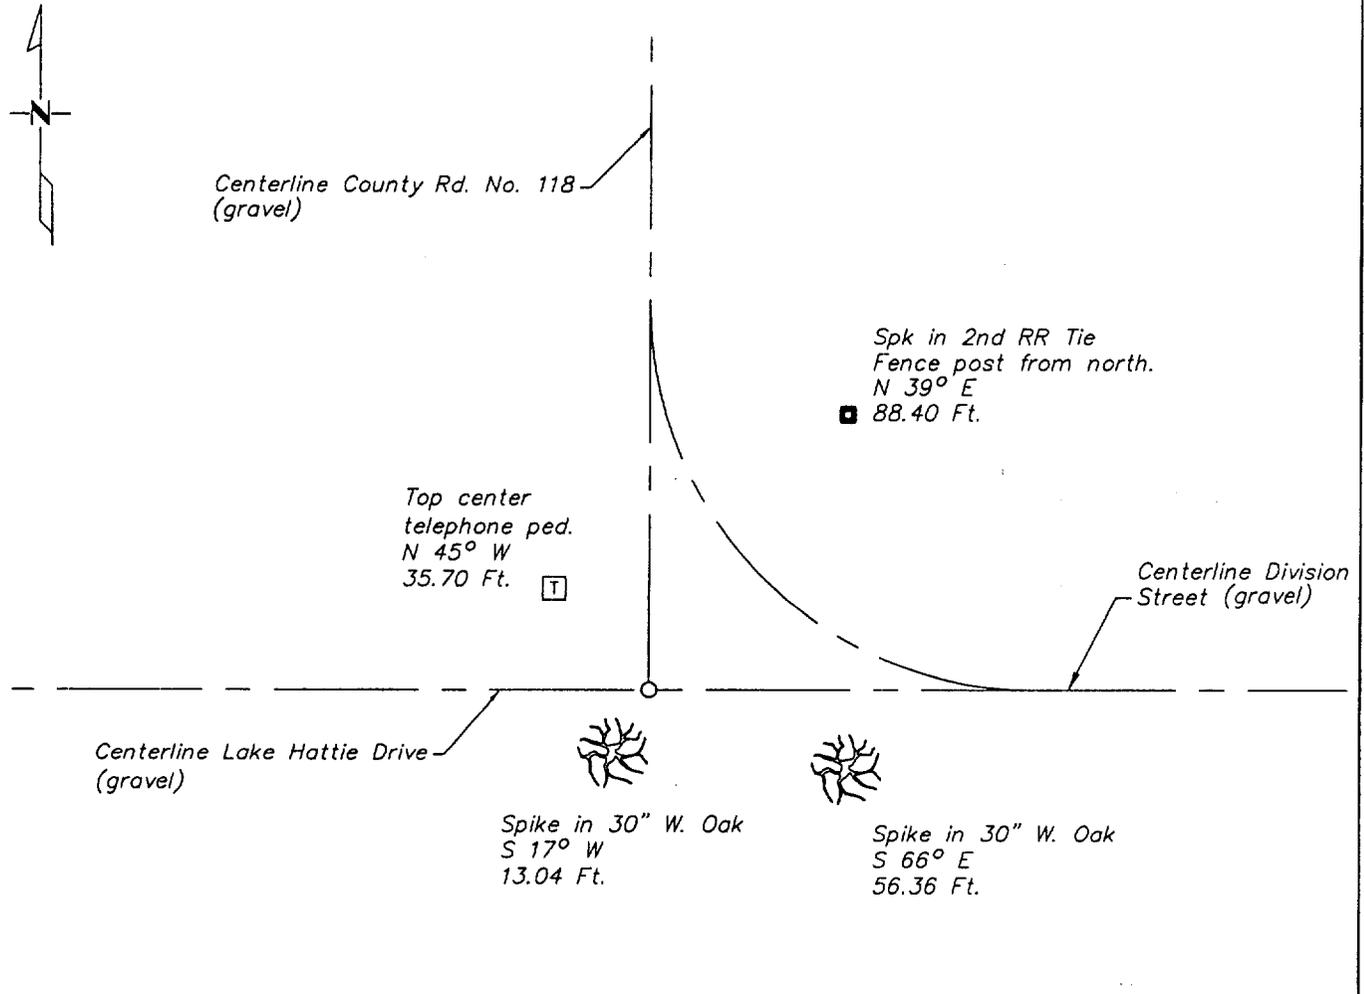

**Abstract Document**  
**#465425**

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce German 4/7/03  
SIGNATURE DATE  
Registration No. 17253

- Land Surveyor     Professional Engineer
- County Surveyor     County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:55 A.M. on the 22nd day of April A.D., 2003

County Recorder Kathryn M. Morby  
By Della Cadwell, Deputy  
DOCUMENT NO. 465425

Statement of Evidence:

Southeast corner Section 31, T. 139, R. 29.

- 1865 - Original Gov't Survey set post.
- 1910 - A.W. Moulster (County Book B p 1-3) finds old Gov't bearing trees and sets post.
- 1915 - H.F. Baldwin (County Book B p 354-360) pulls out oak post and sets 2 1/4" x 48" iron pipe.
- 1916 - A.W. Nowak (Book B p 608-610) finds 2" galvanized iron pipe with cap.
- 2003 - Westwood Professional Services, Inc. finds base of cast iron monument down 3.5' and sets 1/2" iron pipe capped RLS 17253 near surface and takes ties as shown on the face of this certificate.