


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.


Date: 4/28/03 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 9:25 o'clock A.M. on the 1st day of May, 2003 A.D.

County Recorder Kathryn M. Morby
By: Della Cadwell, Deputy
DOCUMENT NO. 465874

EAST QUARTER Corner of Section 4, Township 139, Range 30, 5TH P.M.

On 9/25/02 found a 1 3/4" IRON PIPE 7" ABOVE GROUND

left monument as found, lowered monument, removed monument (explain)


On _____ placed a _____

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. C-13

Not to Scale

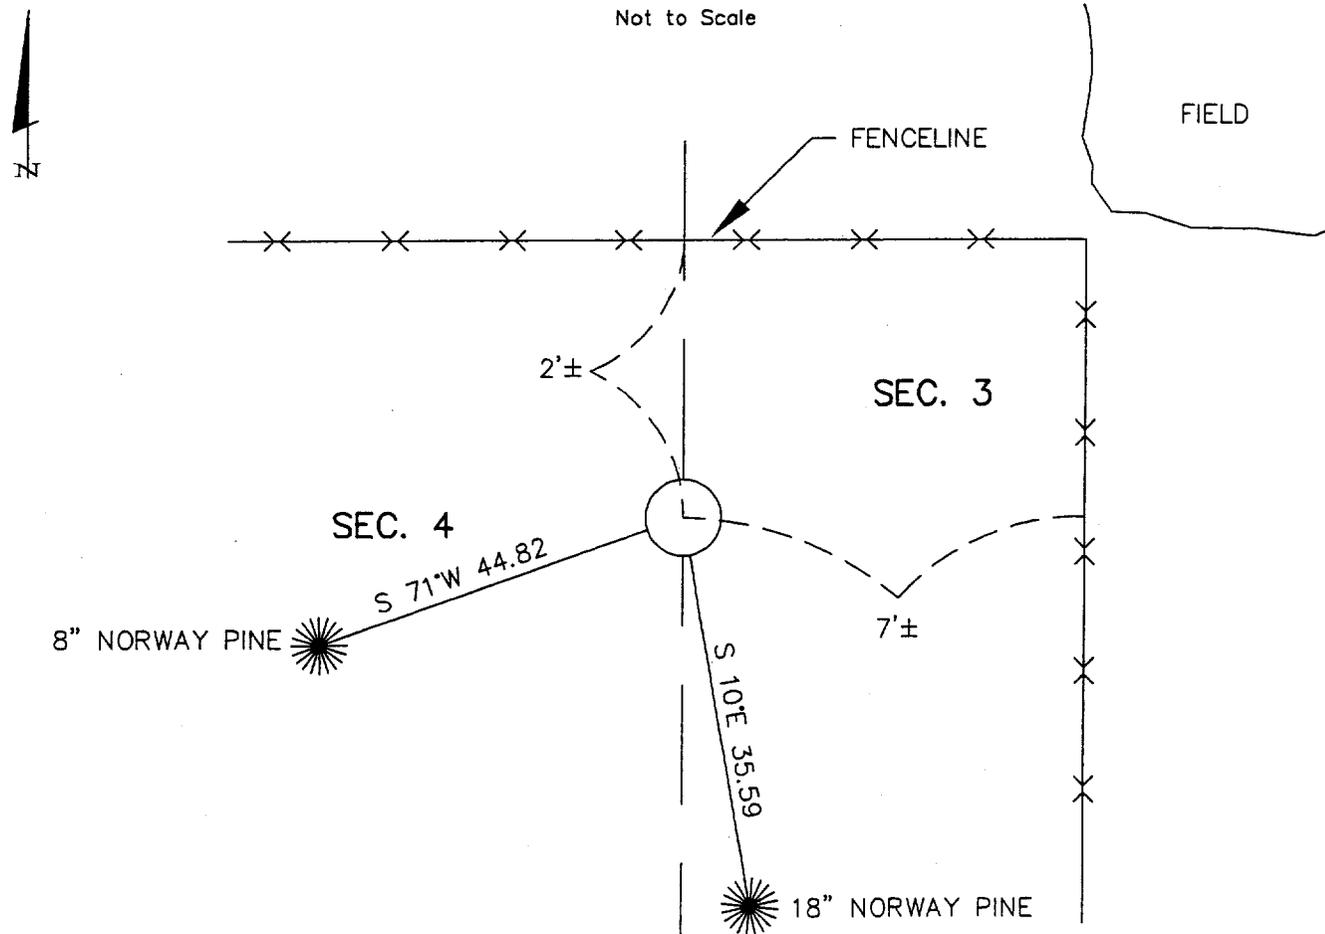

ALL DISTANCES ARE HORIZONTAL
TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. C - 13

East Quarter Corner, Section 4, Township 139 North,
Range 30 West, Cass County, Minnesota

- 1865 Wright & Walker, U. S. Deputy Surveyors, originally established this corner point while surveying the interior subdivision lines of Township 139 North, Range 30 West. They set a wood post for the corner position with the following witnesses: A 6 inch Black Pine, North 87 degrees East, 29 links; A 9 inch Black Pine, South 80 degrees West, 16 links.
- 1969 R. F. Schneider, RLS #5740, found a 1 ½ inch iron monument in place. File at Landecker & Associates, Inc. Walker office.
- 2002 September 25, a Landecker & Associates, Inc. survey crew found a 1 ¾ inch iron pipe 7 inches above ground. Landecker & Associates, Inc. accepts the found iron pipe for the quarter corner position.