

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Alfred A. Lind
Date: 4/5/03 License No: 17008

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:25 o'clock P.M. on the 9th day of May, 2003 A.D.

County Recorder Kathryn M. Morby
By: de, Deputy
DOCUMENT NO. 466365

NORTH QUARTER Corner of Section 26, Township 134, Range 30, 5th P.M.

On Jan. 29, 2003 found a 1/2" IRON PIPE IN ROCK PILE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

decl: 5° E (ASSUMED)

SKETCH OF REFERENCE TIES

Not to Scale

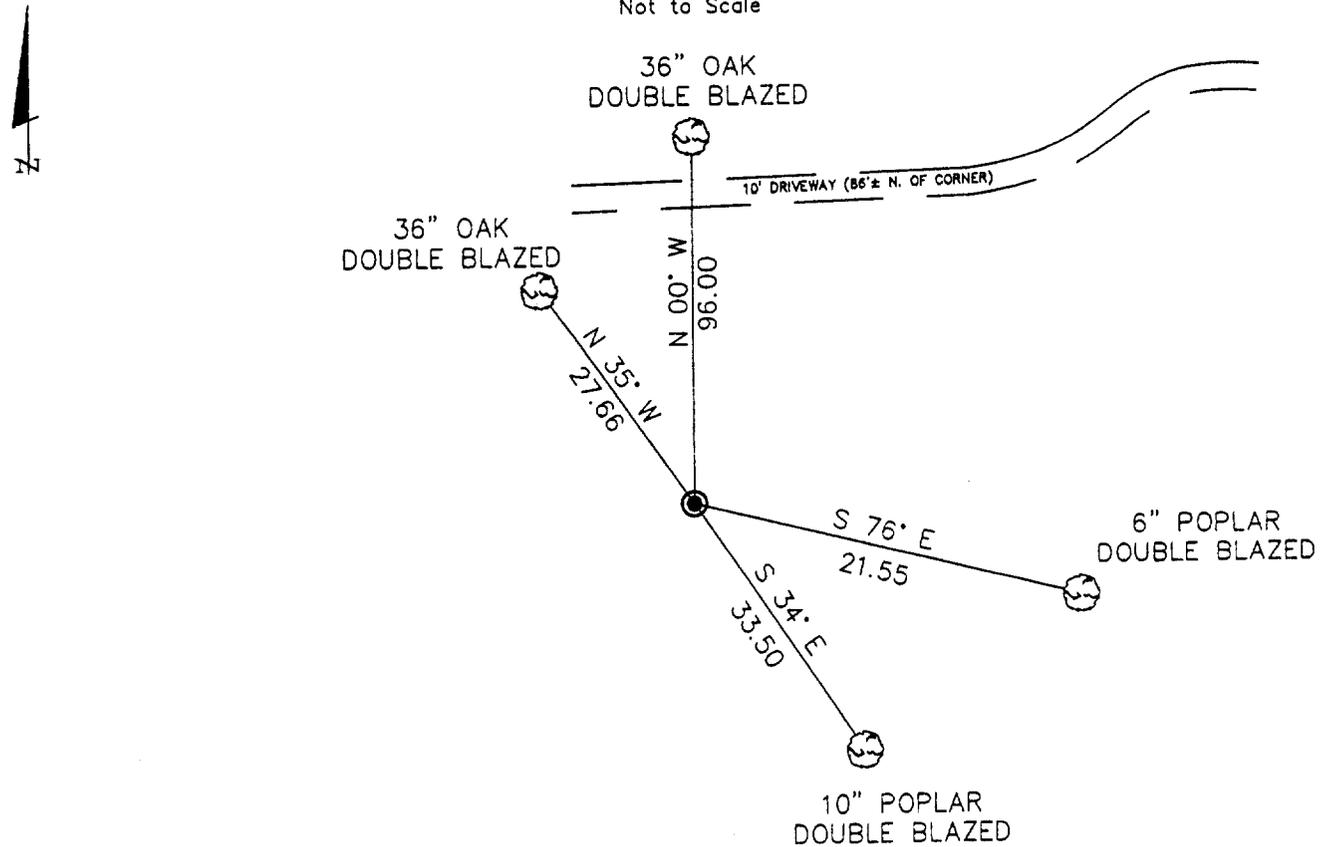

NOTE: DISTANCES SHOWN AS MEASURED TO NAIL IN SIDE OF TREE.

Statement of evidence for this corner position is on the back of this page

North Quarter corner, Section 26, Township 134 North,
Range 30 West, Cass County, Minnesota.

- 1868 Nathan Butler originally established this corner position while subdividing Township 134 North, Range 30 West. A wood post was set to mark the corner with the following witnesses: A 12" N. Pine, North 52 degrees West, 27 links; a 8" N. Pine, South 35 degrees West, 33 links.
- 1996 Landecker and Associates, Inc. found a 1/2" pipe in rock pile.
- 2003 Landecker and Associates, Inc. found the 1/2" pipe in rock pile. Found the following witness: A 36" Oak, North 0 degrees East, 96.00 feet. Established the following witnesses: A 6" Poplar, South 76 degrees East, 21.55 feet; a 10" Poplar, South 34 degrees East, 33.50 feet; a 36" Oak, North 35 degrees West, 27.66 feet.