

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Alvin A. Fink

Date: 4/5/03 License No: 17008

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:30 o'clock P.M. on the 9th day of May, 2003 A.D.

County Recorder Kathryn M. Morby  
By: de, Deputy  
DOCUMENT NO. 466366

NORTHEAST Corner of Section 26, Township 134, Range 30, 5th P.M.

On Jan. 29, 2003 found a 2" IRON PIPE


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

decl: 5° E (ASSUMED)

## SKETCH OF REFERENCE TIES

Not to Scale

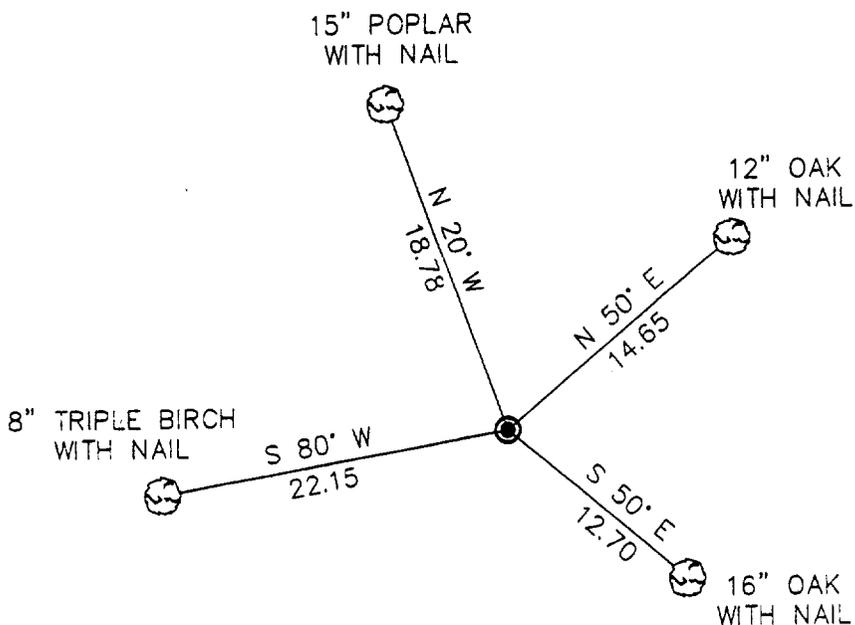

NOTE: DISTANCES SHOWN AS MEASURED TO NAIL IN FACE OF TREE.

Statement of evidence for this corner position is on the back of this page

Northeast corner, Section 26, Township 134 North,  
Range 30 West, Cass County, Minnesota.

- 1868 Nathan Butler originally established this corner position while subdividing Township 134 North, Range 30 West. A wood post was set to mark the corner with the following witnesses: A 28" W. Pine, South 12 1/2 degrees East, 40 links; a 15" R. Oak, North 44 degrees East, 61 links; a 20" W. Pine, South 73 3/4 degrees West, 70 links; a 7" W. Pine, North 13 degrees West, 29 links.
- 1951 Dean Anderson, RLS 3091, indicated a monument was place at the Southeast Corner, Section 23 within the plat of "Birch Forest".
- 1967 County Highway Department found a 2" iron pipe.
- 1996 Landecker and Associates, Inc. found a 2" pipe 1 foot above surface. No evidence of existing ties found. Established the following four witnesses: A 15" Poplar, North 20 degrees West, 18.78 feet; a 12" Oak, North 50 degrees East, 14.65 feet; a 16" Oak, South 50 degrees East, 12.70 feet; a 8" triple Birch, South 80 degrees West, 22.15 feet.
- 2003 Landecker and Associates, Inc. found the 2" iron pipe and the four witnesses from the 1996 recovery. The corner was accepted as a perpetuation of the original corner position.