


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/4 Corner _____ Corner of Section 21 , Township 133 , Range 29
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 8/27/03 found a PK nail
DATE
- left monument as found lowered monument removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

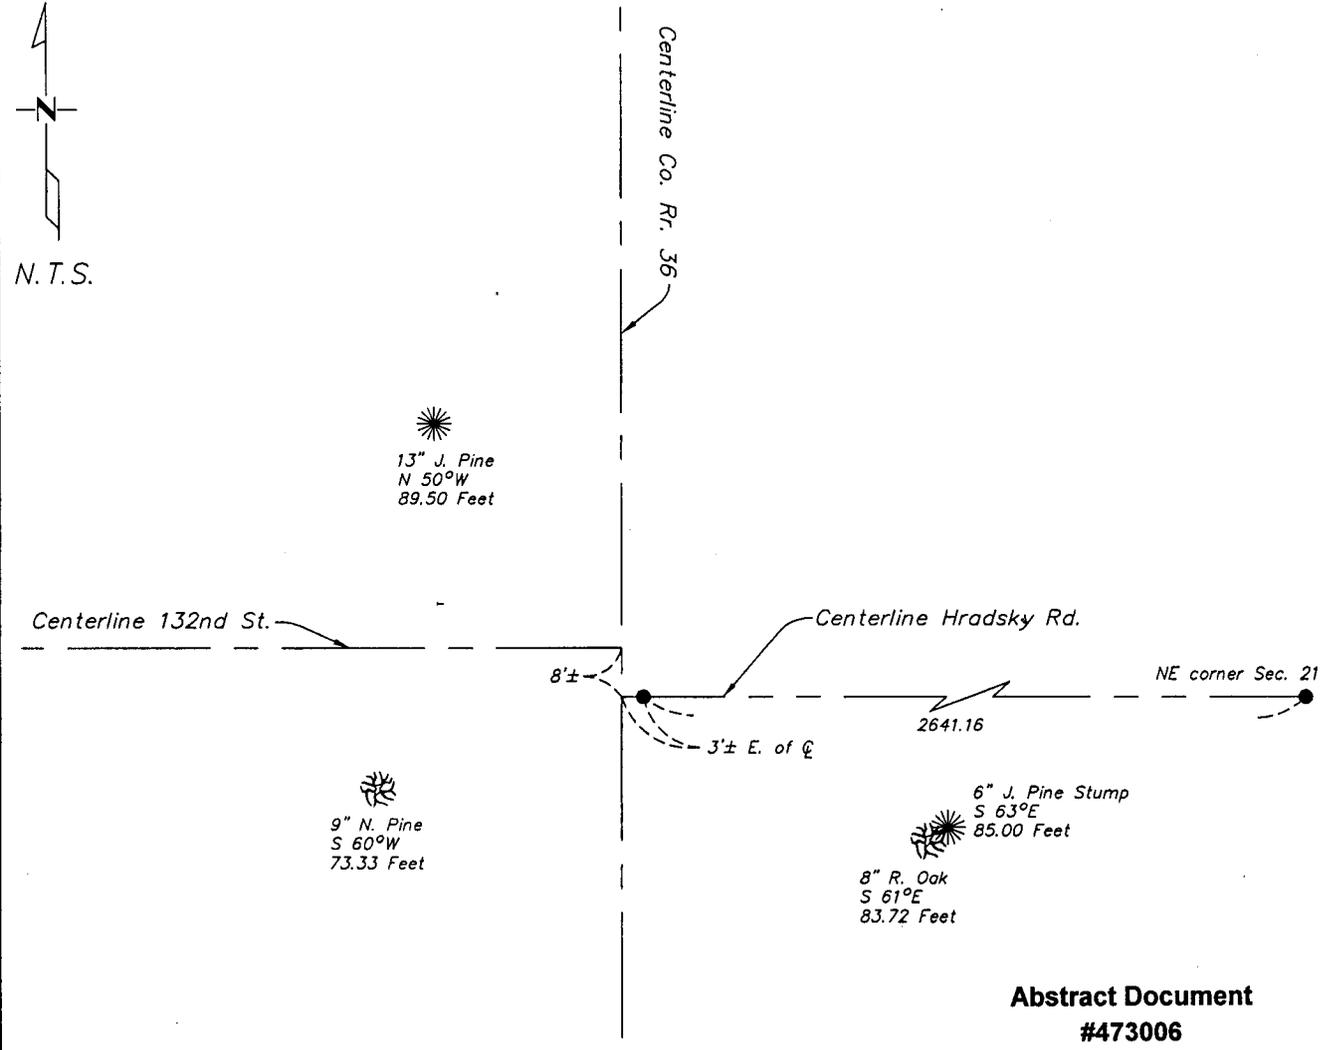

**Abstract Document
#473006**

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce Gruino 9/3/03
SIGNATURE DATE
Registration No. 17253 Bruce Gruino

- Land Surveyor Professional Engineer
- County Surveyor County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:50A.M. on the 11th day of Sept. A.D., 2003
County Recorder Kathryn M Morby
By _____ de Deputy
DOCUMENT NO. 473006

Statement of Evidence

North Quarter Corner, Section 21, T. 133N. R. 29W., 5th P.M.

- 1870 – Wood post was set for corner.
- 1918 – E.B. Horst found old bearing tree stumps and set 2" X 48" iron monument
- 1920 – L. Knudsen found iron pipe at very old location shown to him by town board.
- 1972 – Dean M. Anderson finds a P.K. nail and pulls new ties.
- 1977 – Certificate of Survey shows an in place 1/2" iron capped #3091.
- 1982 – County Highway and Surveyor pulled Dean M. Anderson pipe, checked below and found nothing. Iron checked with 1972 ties.
- 1982 – Dean M. Anderson verified ties with one power pole at a distance of 46.82' N 45° W, iron had been replaced.
- 1999 – Cass County Surveyor finds in place P.K. nail 2' East of centerline Co. Rd. No. 36, located on centerline of Hradsky Rd East and 18' South of Hradsky Rd. West and pull ties as shown on the face of this certificate.
- 2003 – Westwood Professional Services, Inc. finds P.K. nail in place and verifies with existing ties.