

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

TERRY L. FREEMAN

Date: 9/30/03 License No: 21367

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:05 o'clock P.M. on the 7th day of Oct., 2003 A.D.

County Recorder Kathryn M Norby

By: de, Deputy  
DOCUMENT NO. 474532

NORTH QUARTER Corner of Section 33, Township 140, Range 26, 5TH P.M.

On 9/16/03 found a 3/4" IRON PIPE WITH PLASTIC CAP MARKED RLS 9672 UP 5"


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

decl: 5° EAST (ASSUMED)

## SKETCH OF REFERENCE TIES

Not to Scale

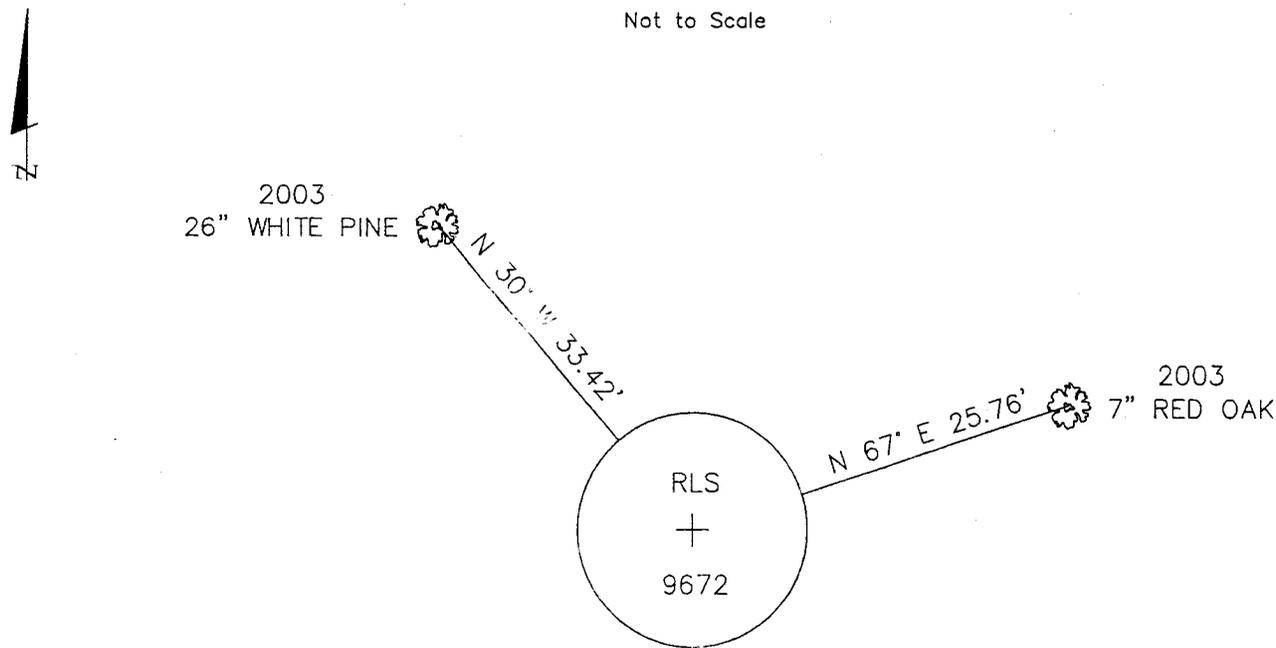

ALL BEARING TREES ARE MARKED WITH BEARING TREE TAGS.

ALL DISTANCES ARE HORIZONTAL TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page.

North Quarter, Section 33, Township 140 North, Range 26 West, Cass County, Minnesota

- 1871 Walker, Allen, & Putnam, U.S. Deputy Surveyors originally established this corner while surveying the subdivision and meander lines of Township 140 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses; A 16 inch White Pine, North 79 degrees East, 24 links; A 10 inch White Birch, South 87 degrees West, 35 links.
- 1937 CCC Book #5, page 17, shows approximate corner set.
- 1987 Wallace F. Buckler, Registered Land Surveyor, set a ¾ inch iron pipe at the lost position.
- 2003 September 16, a Landecker & Associates, Inc. survey crew found a ¾ inch iron pipe and accepts the corner as the Quarter corner and makes the following accessories: A 26 inch White Pine, North 30 degrees West, 33.42 feet; A 7 inch Red Oak, North 67 degrees East, 25.76 feet.