

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 8, Township 142 N, Range 31 W, 5th P.M.

STATE OF MINNESOTA, COUNTY OF CASS


At the corner location shown on the sketch:

On 5/4/04 found a NO MONUMENT FOUND

left monument as found, lowered monument, removed monument (explain)

On 5/4/04 placed a REFERENCE CORNER ONLY (NEW ROAD TO BE PUT IN)

SKETCH OF REFERENCE TIES

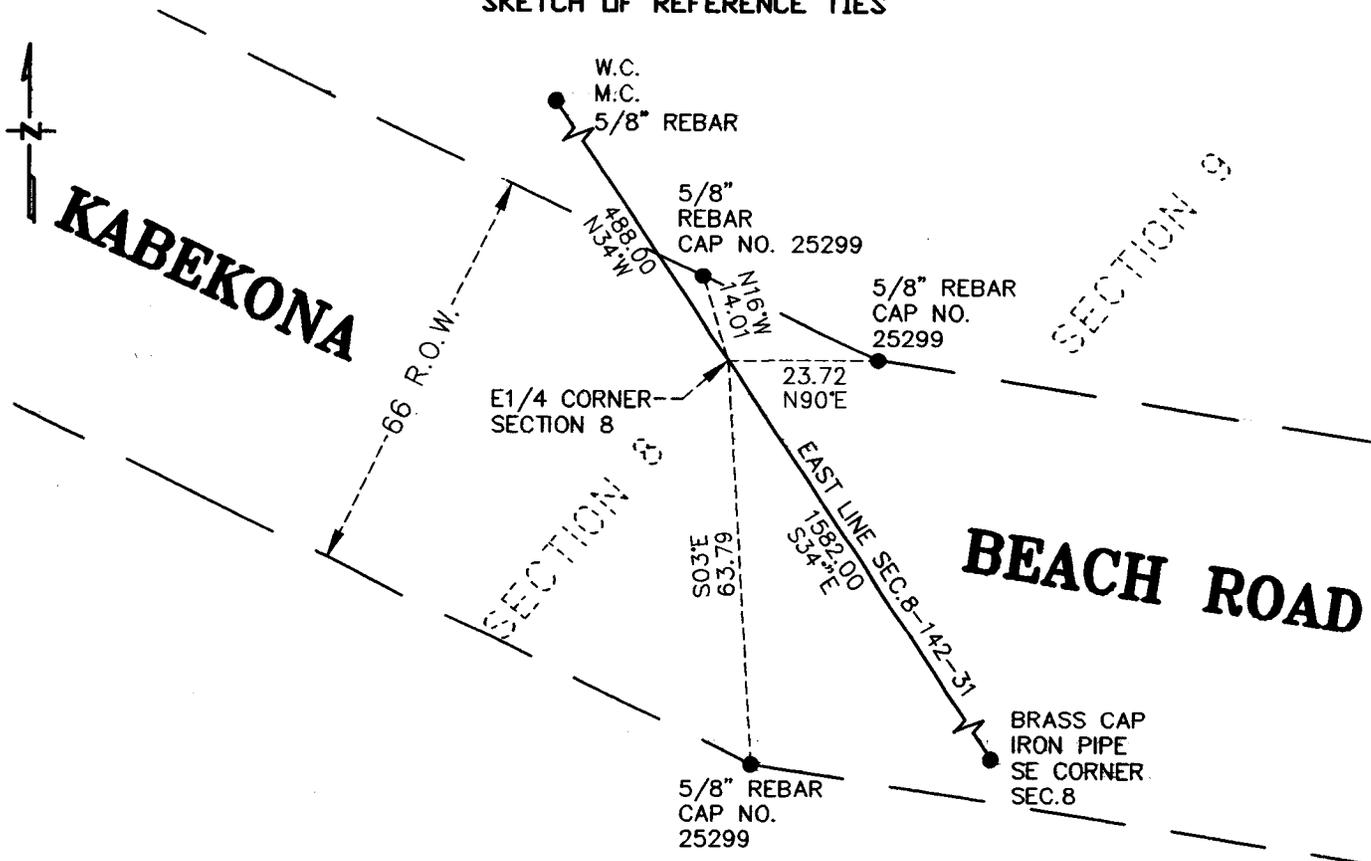

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Craig P. Sedulip 7/9/04
signature date

Registration No. 25299

- Land Surveyor
- Professional Engineer
- County Surveyor
- County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 20____

County Recorder _____
by, _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

East Quarter Corner, Section 8, Township 142 North, Range 31 West, Cass County, Minnesota.

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position with a wood post while subdividing Township 142 North, Range 31 West and established corner ties as follows:

8" Jack Pine	North 79 degrees West	14 Links
8" Jack Pine	North 7 degrees East	17 Links

1917 County Surveyor's record Book B pages 521-526 shows survey by E.B Horst. He indicates setting a 2"x 48" Boiler flue 36" in the ground. The notes do not indicate that any bearing trees were marked.

1927 a County resurvey in Recorders Office file cabinet E Number 58 shows a survey by John Greene. The plat indicates an iron monument in place.

2004 on May 4, a survey crew from RLK-Kuusisto doing a survey for a plat of KABEKONA BEACH searched for the original bearing trees and the iron monument from 1927 and found no evidence. Using found monuments on the south line of Section 8 and on the east line of the plat of KABEKONA SPRINGS ESTATES and the information in the resurvey by John Greene RLK-Kuusisto re-established this corner location. Reference ties are as follows:

5/8" rebar	North 16 degrees West	14.01 feet
5/8" rebar	North 90 degrees East	23.72 feet
5/8" rebar	South 03 degrees East	63.79 feet

A000487352

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTACERTIFIED, FILED, AND/OR
RECORDED ON
08/06/2004 11:09:25AMAS DOC #: A000487352
PAGES: 2
REC FEES: \$0.00KATHRYN M. NORBY
COUNTY RECORDERBY Kathryn M. Norby
TV DEPUTY