


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Section \_\_\_\_\_ Corner of Section S21/S22, Township 141N, Range 25W, 5th P.M.  
S28/S27  
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 6/23/04 found  corner obliterated, restored from surveyor Flynn's  
DATE  
road survey of 1913.  
 left monument as found,  lowered monument,  removed monument (explain)
- On 6/30/04 placed a 6" x 8" x 18" granite block flush with road surface  
DATE  
 and a 1/2" x 24" re-bar along side/plastic cap 12261.

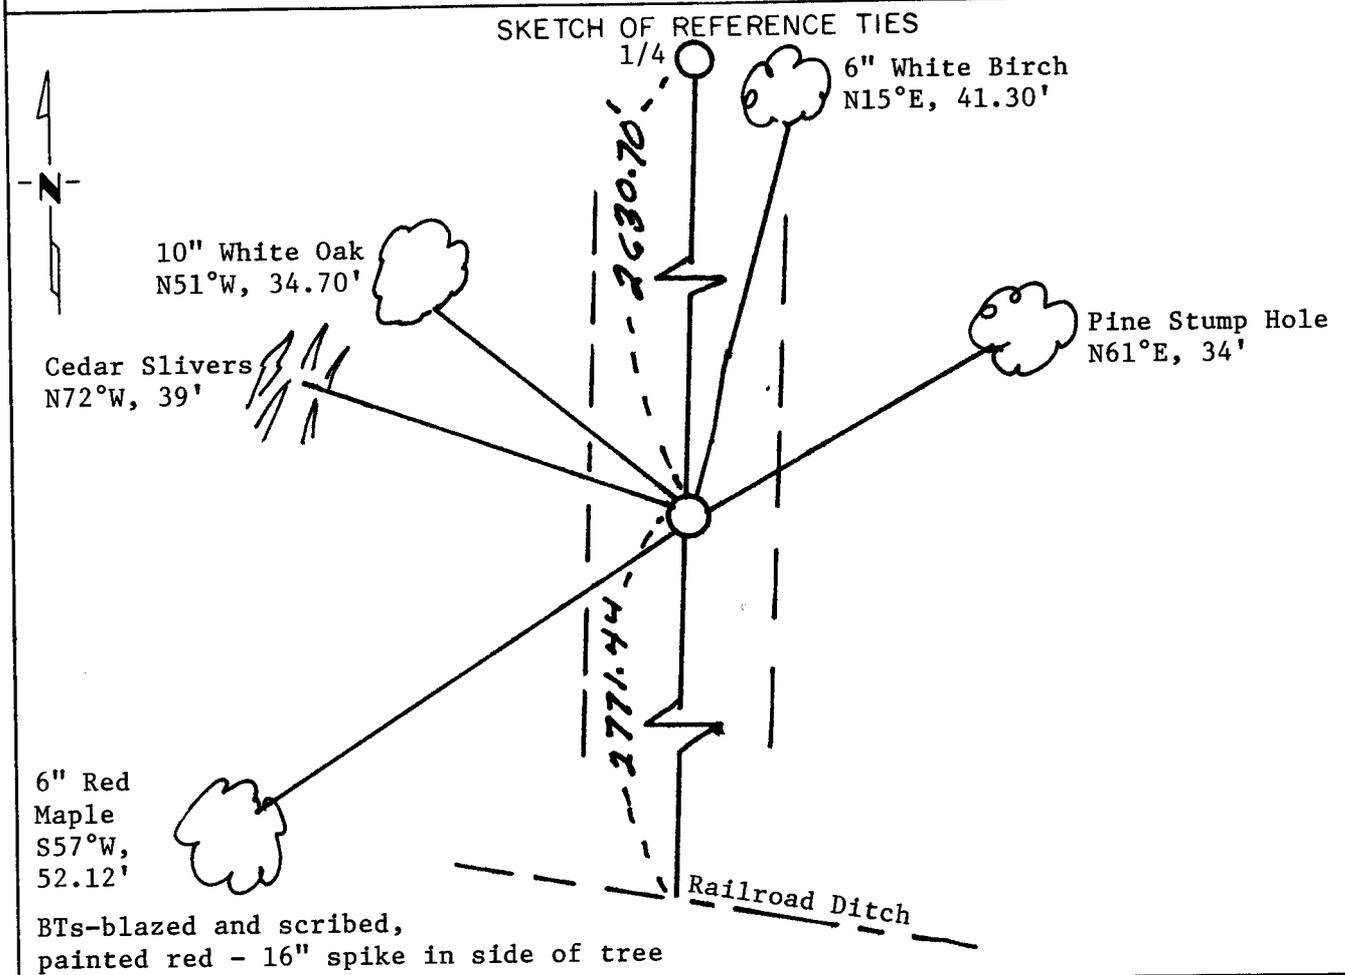

Statement of evidence relative to this corner location is on back of page.



I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Milo E. Stefan 2/12/05  
SIGNATURE DATE

Registration No. 12261

- Land Surveyor  
 County Surveyor

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

This corner was established by Edgar P. Putman and William P. Allen, Deputy Surveyor, in April 1871. They set a wood post for the Section Corner with four bearing trees:

- 5" Fir, N40°E, 29 Links
- 8" Fir, ?50°E, 47 Links
- 12" Pine, S14°W, 12 Links
- 10" Cedar, N50°W, 20 Links

In 1913, J.H. Flynn, Cass County Surveyor, recovered a 16" Pine Stump, S14°W, 12 Links and a 12" Cedar (standing), N50°W, 20 Links. He established two new bearing trees:

- 16" White Pine, N61°E, 34 Feet
- 15" Cedar, N72°W, 39 Feet

Distance from Quarter Corner Northerly was measured to be 2631 feet.  
Distance to Railroad ditch Southerly was measured to be 2770 feet.

6/30/2004 - By EDM measurement from the Quarter Corner to Sections 21 and 22 Northerly to the railroad ditch Southerly correspond to Flynn's distances exceptionally close; North 2631' (Flynn) 2630.70' (2004); South 2770' (Flynn) 2771.44' (2004).

I accept the stump hole as the position of the White Pine position and the Cedar Slivers for the positions of Flynn's bearing trees in his 1913 survey as of record as "Plat of Surveys #378 and #379" in the Cass County surveyor's office.

We placed a 6" x 8" x 18" granite block with bearing trees as indicated on the face of this document.

*Milo E. Stefan*



A000496586

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
03/29/2005 01:28:45PM

AS DOC #: A000496586  
PAGES: 2  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY *Kathryn M. Norby* DEPUTY  
*HN*