


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

QUARTER \_\_\_\_\_ Corner ~~to~~ Sections 34, Township 140N, Range 26W, 5th P.M.  
3  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 7/19/02 found a 1 1/2" Iron pipe with a 1/2" x 1/2" steel rod with a  
DATE  
3" steel cap stamped "1/4" - fence post along side.  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

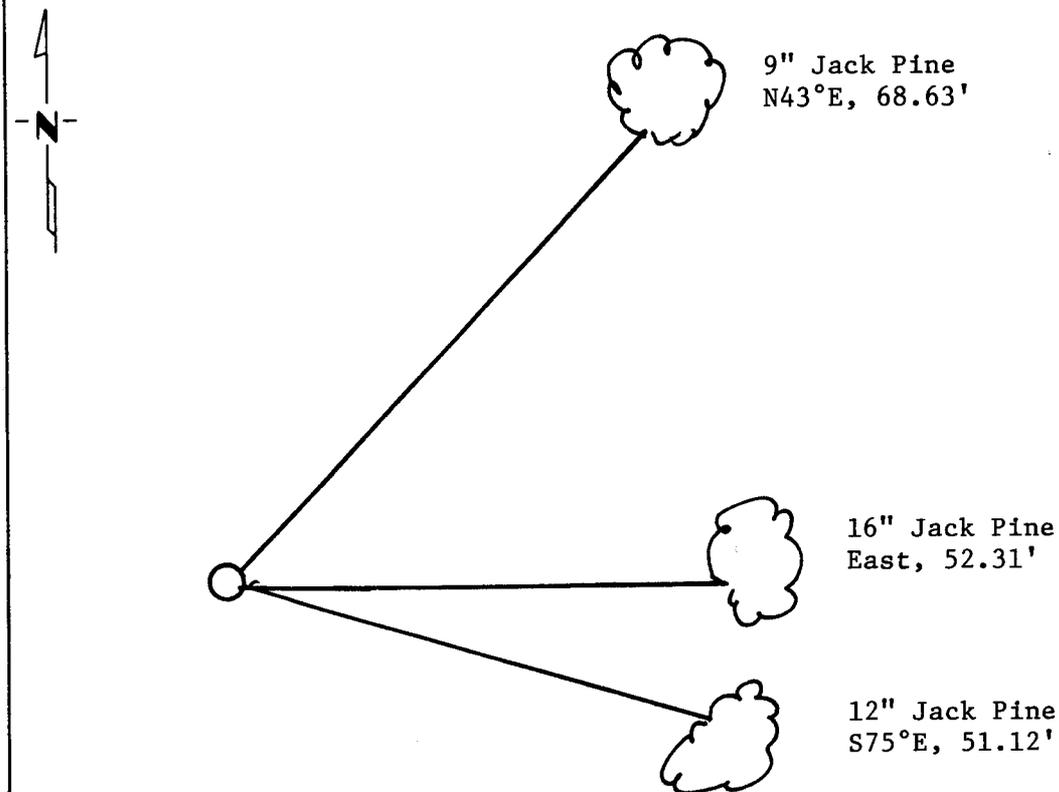

Statement of evidence relative to this corner location is on back of page.



I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Milo E. Stefan 2/11/05  
SIGNATURE DATE

Registration No. 12261

Land Surveyor

County Surveyor

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19 \_\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

ORIGINAL SURVEY

1868 - This corner was established by the U.S. General Land Office surveyors at 40.00 chains whereby a wood post was set with two bearing trees:

14" Yellow Pine, N18°E, 60 Links

9" Aspen, S69°W, 55 Links

1938 - CCC crew from Washburn Lake, Book 20, Page 40

1998 - Landecker found corner and set steel fence post, called 3 bearing trees:

9" Jack Pine, N43°E, 68.63 Feet

16" Jack Pine, East, 52.31 Feet

12" Jack Pine, S75°E, 51.12 Feet

These BT's were blazed 20 - 25 years ago.

I accept this position as the perpetuated corner position.

*Milo E Stefan*



A000496588

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
03/29/2005 01:28:47PM

AS DOC #: A000496588  
PAGES: 2  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY *Kathryn M Norby* DEPUTY