

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 TERRY L. FREEMAN

Date: 4/21/05 License No: 21367

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
 DOCUMENT NO. _____

EAST QUARTER Corner of Section 22, Township 140, Range 26, 5TH P.M.

On _____ found a _____

left monument as found, lowered monument, removed monument (explain)


On 4/12/05 placed a MAGNETIC MASONRY NAIL ±CL HWY. 6

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. P-17

Not to Scale

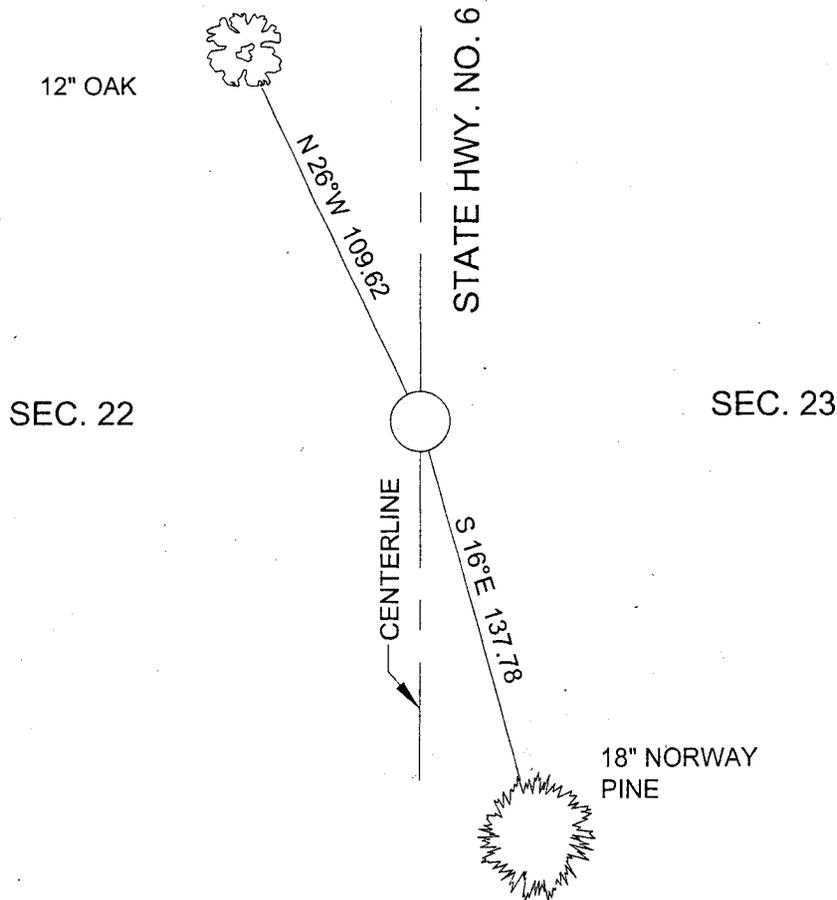

ALL DISTANCES ARE HORIZONTAL
 TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. P - 17.

East Quarter, Section 22, Township 140
North, Range 26 West, Cass County,
Minnesota

1871 William P. Allen and Edgar P. Putnam, U.S. Deputy Surveyors, originally established this corner position while surveying the interior subdivision lines and meanders of Township 140 North, Range 26 West. A wood post was set with the following witnesses: A 20 inch Norway Pine, South 2 degrees East, 247 links; A 3 inch Aspen, North 50 degrees West, 17 links.

Date? County Survey Record Book "B", pp. 88-89 shows a survey of State Rural Highway No. 83 by George A. Ralph. A monument is shown in the copied field notes of Ralph's Assistant Engineer H.L. Calwell. No ties are shown to the corner position. Recorded as Survey Record No. 257.

1973 R.F. Schneider, RLS#5740, found a 1 inch iron pipe and accepts it as the Northeast corner of Section 22. He found a 2 1/2 inch capped iron pipe and accepts it as the Southeast corner of Section 22. He established the East Quarter Corner position at the split between these two positions. On record at Landecker and Associates, Inc. Walker Office, field book 29, p. 12.

2000 A Landecker and Associates, Inc. survey crew found a railroad spike at the Northeast corner of Section 22 and an iron pipe at the Southeast corner of Section 22. The distance found agreed with R.F. Schneider's distance between these positions. The split between these two positions was accepted as the East Quarter Corner position.

2005 A Landecker and Associates, Inc. survey crew set a magnetic masonry nail proportionally for the Quarter Corner position between the Northeast and Southeast Corners and established the following accessories: A 12 inch Oak, North 26 degrees West, 109.62 feet; An 18 inch Norway Pine, South 16 degrees East, 137.78 feet.

A000503533
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
09/09/2005 10:52:20AM

AS DOC #: **A000503533**
PAGES: **2**
REC FEES: **\$0.00**

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn Norby DEPUTY
AV