

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

[Signature]

Date: 8/26/05 License No: 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO. _____

NORTHEAST CORNER Corner of Section 16, Township 139, Range 30, 5TH P.M.

On 3/28/05 found a 2" IRON PIPE UP ±10 INCHES

left monument as found, lowered monument, removed monument (explain)


On _____ placed a _____

decl: 5° EAST (ASSUMED)

SKETCH OF REFERENCE TIES

INDEX NO. J-13

Not to Scale

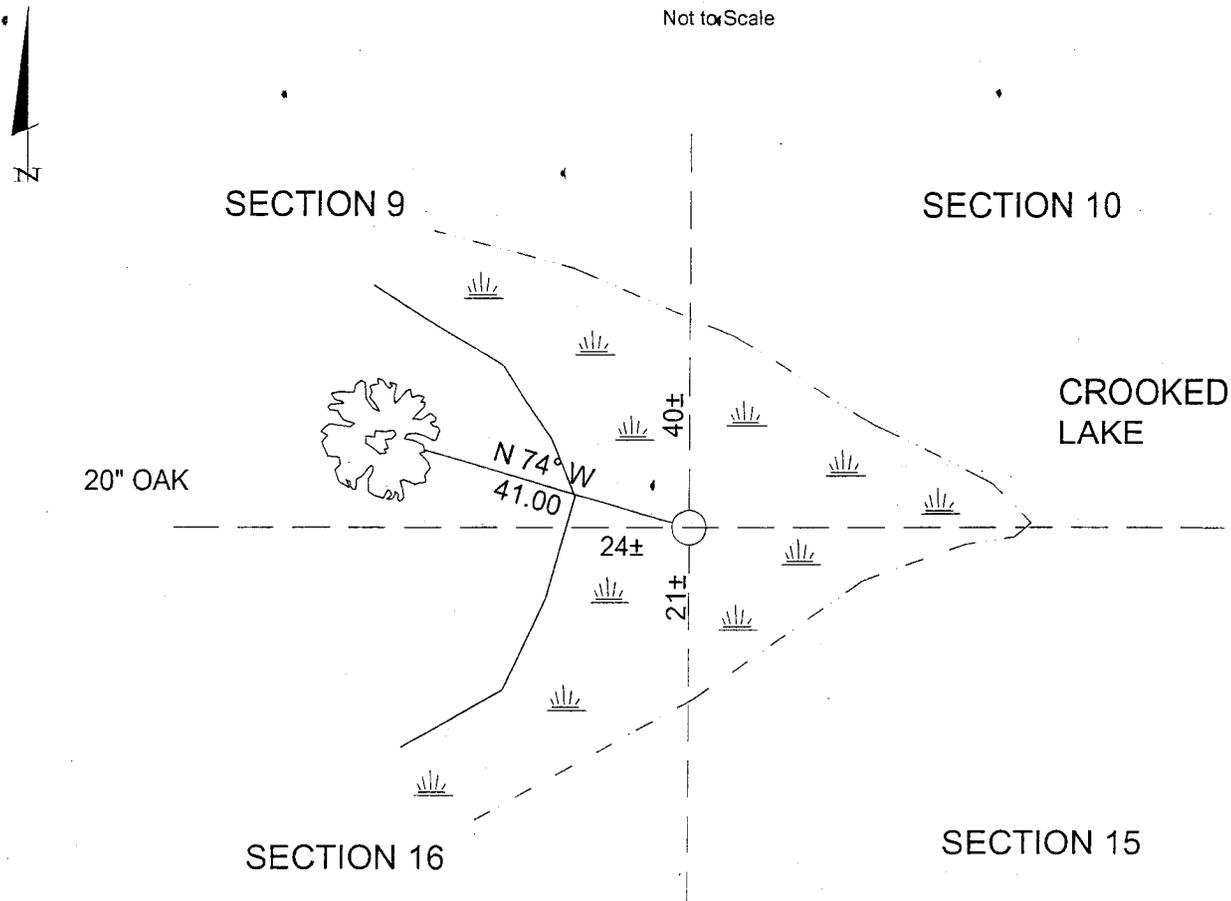

ALL DISTANCES ARE HORIZONTAL
TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. J - 13

Northeast Corner, Section 16, Township 139 North,
Range 30 West, Cass County, Minnesota.

- 1865 George B. Wright and Thomas B. Walker, U.S. Deputy Surveyors, originally established this corner position while surveying the subdivisions and meanders in Township 139 North, Range 30 West. A wood post was set for the Northeast corner of Section 16 and Meander Corner No. 51 with the following witnesses: A 10 inch Norway Pine, South 84 degrees West, 136 links; An 18 inch Norway Pine, North 64 degrees 45 minutes West, 125 links.

- 1911 Garmen, microfilm roll 11 S, Book 92, page 20, found 1 bearing tree.

- 1970 A Minnesota Conservation Department breakdown of Section 15 shows an inplace iron pipe at the Northeast corner position for Section 16. They found a 2 ¼ inch iron pipe and accepted it as the corner position.

- 1976 Roger Mustonen, R.L.S.#11946, shows a monument found at this corner position while surveying plat of Stellotto.

- 2005 A Landecker and Associates, Inc. survey crew found a 2 ¼ inch iron pipe up ± 10 inches and accepts it as the corner position. The following accessory was established: A 20 inch Oak, North 74 degrees West, 41.00 feet.

A000505015
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
10/11/2005 12:37:57PM

AS DOC #: A000505015
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby
#17 DEPUTY