


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 Corner _____ Corner of Section 26 , Township 135 , Range 30
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found lowered monument removed monument (explain)
- On 9/12/05 placed a 1/2" Iron monument capped RLS 17253
DATE

SKETCH OF REFERENCE TIES

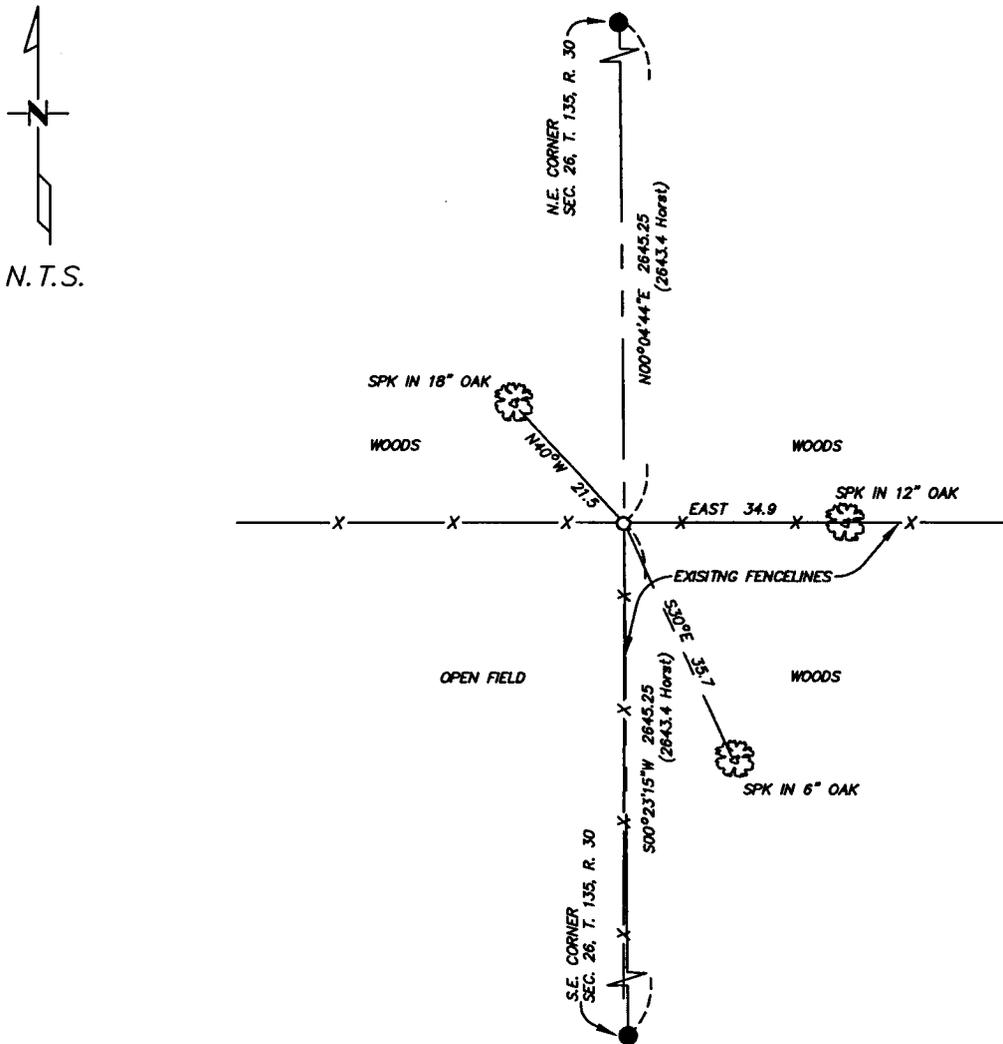

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bruce Linn 9/26/05
SIGNATURE DATE

Registration No. 17253

- Land Surveyor Professional Engineer
- County Surveyor County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

East Quarter, Section 26, T. 135N. R. 30W., 5th P.M.

1869 – Wood post set for corner

1921 – E.B. Horst set 2"x48" iron monument. County Resurvey "E-33". Book C, page 412.

1999 – John Walker (DNR) certificate shows iron pipe found. During conversation with John Walker (9/20/05), he stated that corner card was a mistake and corner was never visited.

2005 – Westwood Professional Services, Inc. sets iron monument capped RLS 17253 at split on old fence intersection which agrees reasonably with resurvey of Section 26 by E.B. Horst. Terry Stumvoll, property owner to east, long time family owner in area states that fence intersection has been accepted position for corner. Ties to which are shown on the face of this certificate.

A000509688

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
02/08/2006 11:46:27AM

AS DOC #: A000509688
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby
#V DEPUTY