

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA CONTAINED HEREIN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

Ronald L. Carnell Sr. Aug. 15, 2005
RONALD L. CARNELL SR.
MN PLS NO. 43415

- LAND SURVEYOR PROFESSIONAL ENGINEER
 COUNTY SURVEYOR COUNTY ENGINEER

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE CORNER OF SECTION 20, TOWNSHIP 143N, RANGE 31 W, 5TH PRINCIPAL MERIDIAN
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:
ON JAN 20, 2005 FOUND A(N) 2" PIPE PLUS A GLO BRASS MONUMENT
 LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
ON _____, 2005 PLACED A(N) _____


SKETCH OF
REFERENCE TIES

US GLO 1919 SURVEY
BRASS MONUMENT

2" PIPE NE CORNER
SEC 20 T143N R31W

Note:

All dimensions are to the 2" pipe
beside the brass monument

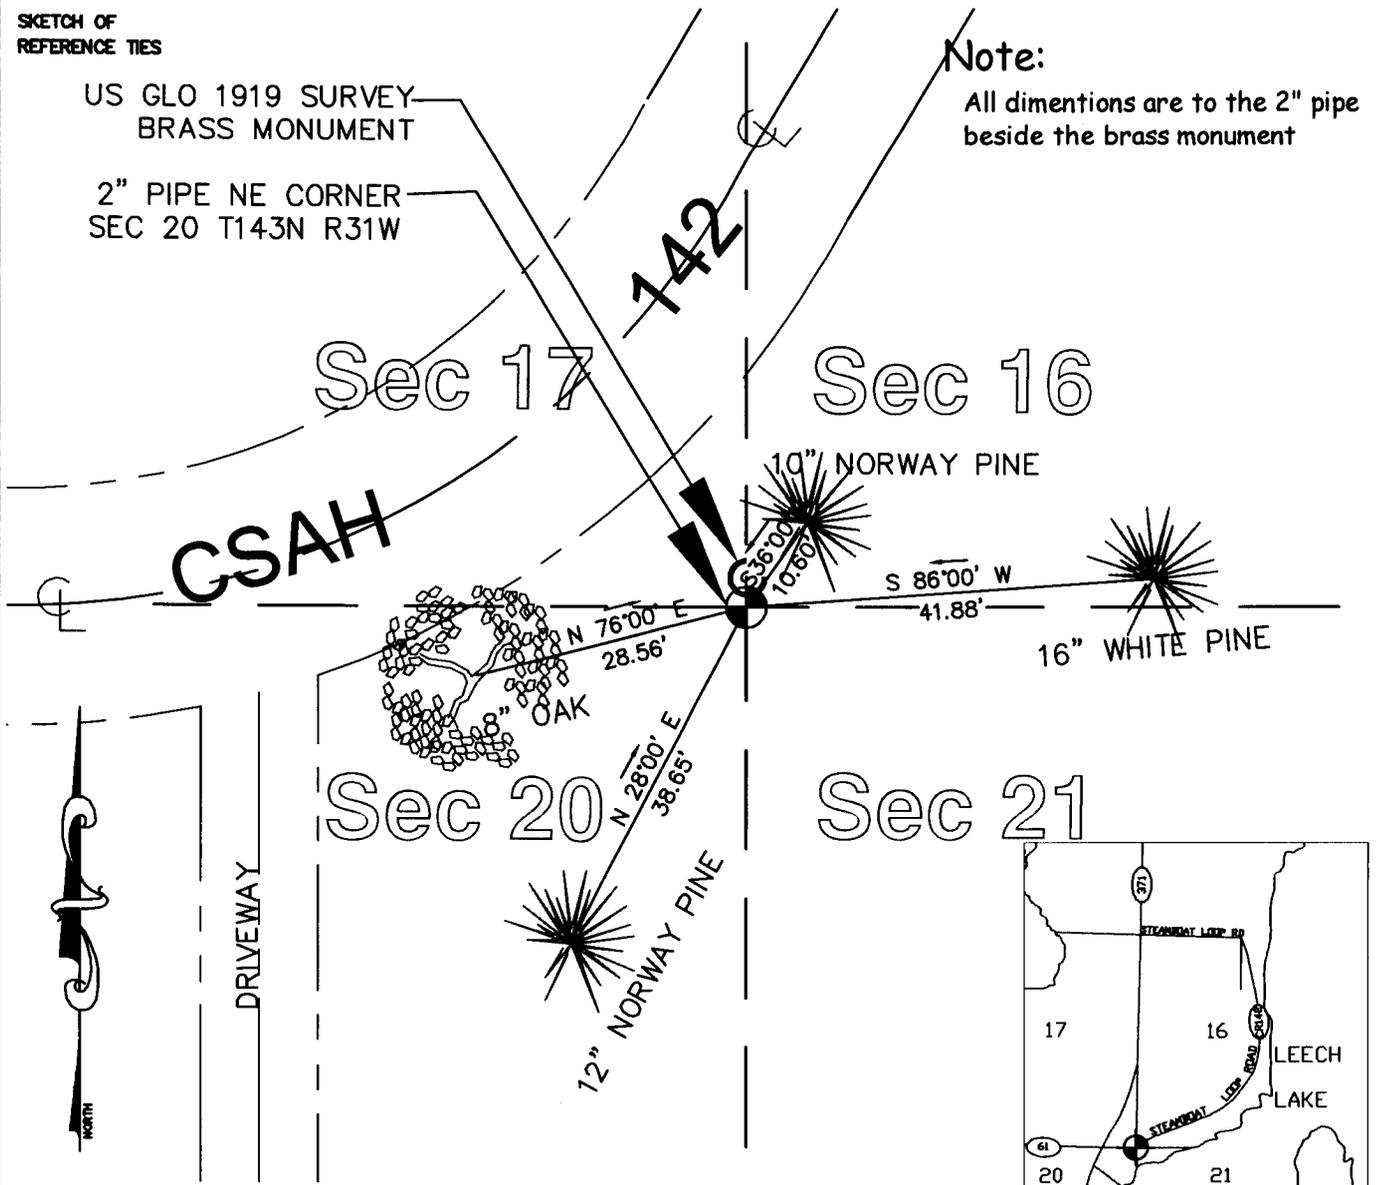

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

Statement of Evidence

Northeast Corner Section 20, Township 143 North, Range 31 West

The original corner was established and monumented by the General Land Office in 1875. The field notes describe the monument as a post. Four bearing trees were tied to the corner for reference.

On May 24, 1976, the D.N.R. Engineering Bureau contacted the Cass County offices of Recorder, Auditor, Engineer, Surveyor, and the Minnesota Department of Transportation.

On August 14, 1917, E.B. Horst, then Assistant County Surveyor found the Government post in place and a bearing tree Aspen stump 4"- N 28 degrees W- 49 links. Scribing on the stump was visible and the government distance to the post at the corner checked. The three other government bearing trees were gone. On August 15, 1917, Horst remonumented the corner with a 2"x48" iron monument and measured to a new bearing tree-Norway Pine 10"- N 24 degrees 30 minutes E-68.0 feet.

In 1919, the G.L.O. resurveyed the area and their field notes state as follows: Intersect the true point for the corner of Sections 16, 17, 20 and 21, Reestablished by Deputy County Surveyor E.B. Horst and recorded in the county records as such, which is marked by a galvanized iron pipe, 2 1/2" dia. Set in a mound of stone, North and alongside of local post and set an iron post, 3 'x 2'- 28 inches in ground, with brass cap marked. Four new bearing trees were taken-one previously used in 1917 by E.B. Horst.

"Steamboat Bend Subdivision" surveyed and recorded on May 28, 1970, by Peter J. Meyer, R.L.S. #3628, and "Steamboat Bend Subdivision-First and Second Additions", also surveyed by Meyer and recorded in 1971, all tied into corner.

On May 13, 1976, the D.N.R. found the corner as shown and described on this certificate based on previous surveying record. The true corner is the 2" iron pipe on the South side of the brass capped U.S.G.L.O. monument.

On January 20, 2005 Emmons and Olivier Resources located the corner described above. After analysis of all information the corner was accepted as marking the location.

A000509700

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
02/08/2006 11:46:39AM

AS DOC #: A000509700
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M. Norby
TV DEPUTY