

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 33, Township 133 N, Range 29 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 7/7/97 found a 3/4 INCH AXEL SHAFT WITH HUB ON TOP, UP 0.3'  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ Placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

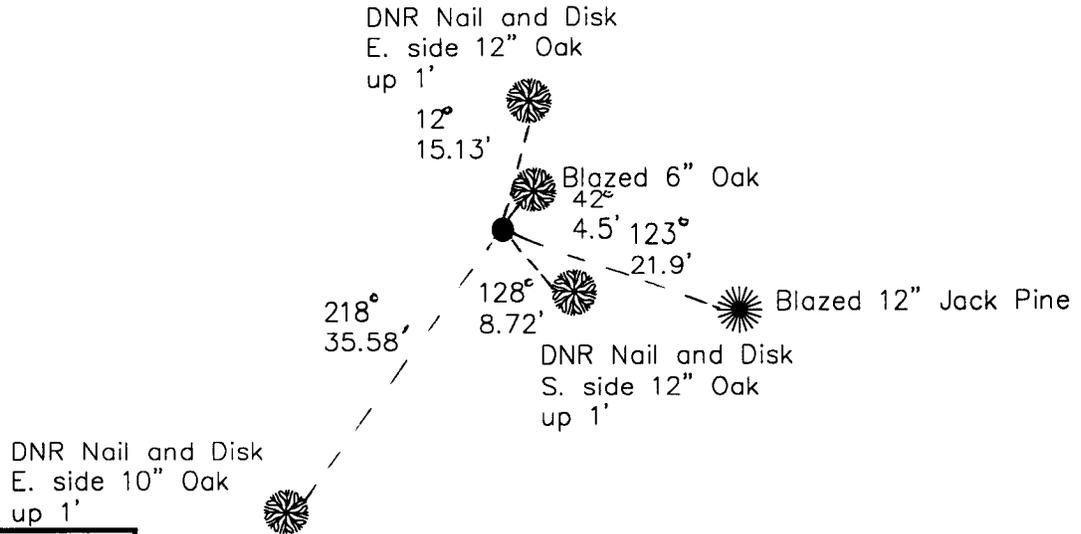

NAD83 CASS  
CO. COORDINATES

N 151253.85

E 532577.49

ALL AZIMUTHS TAKEN WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

DATE 2/24/98  
FILE SPK00139

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 2/25/98  
SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

**North Quarter Corner Section 33, Township 133 North, Range 29 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
 Cass County Surveyor  
 Crow Wing County Surveyor  
 Wally Buckler, Land Surveyor  
 Central Minnesota Surveying  
 Widseth, Smith and Nolting of Brainerd  
 Wadena County Recorder (has Howard's records)

1870 The U.S. General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees are marked:

Blk. Pine 8" South 45° 15' East 57 links (37.62')  
 Norway Pine 15" North 19° West 163 links (107.58')

1962 Dean Anderson made a plat for McKisson Acres in Section 28. His records show an iron monument in place for this corner. He set an iron pipe 327.9' easterly of the corner on the north line of Section 33. The records show a distance of 2631.58' to the northeast corner of Section 33 and a distance of 2638.11' to the center of Section 33.

1980's Wally Buckler found an iron shaft in place for this corner. He measured 2631.02' to the northeast corner of Section 33, 2768.32' to the northwest corner and 2637.57' to the center of section. The following ties were taken:

Jack Pine 10" SE 21.94'  
 Jack Pine 10" NE 21.13' (face tie, found inplace)  
 Red Oak 6" NE 4.70'

1997 The DNR survey crew found a 3/4" axle shaft with hub on top, up 4". The axle fits Anderson's survey with an iron pipe found 327.91' easterly of the corner and fits two of Buckler's ties. We measured 2630.38' to the northeast corner of Section 33, 2768.41' to the northwest corner and 2637.56' to the center of section. The axle was accepted as marking the obliterated location of the corner.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 500 Lafayette Road, St. Paul, MN 55155-4029.

A000515672

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
07/24/2006 09:43:46AM

AS DOC #: A000515672  
PAGES: 3  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY Kathryn M. Norby DEPUTY  
KV