


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.



 TODD R. JOHNSON
 Date: 6-26-07 License No: 44869
 PLS #44869

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____
 By: _____, Deputy
 DOCUMENT NO. _____


NORTH QUARTER Corner of Section 4, Township 138, Range 29, 5TH P.M.

- On _____ found a _____
- left monument as found,
 lowered monument,
 removed monument (explain)
- On 12/22/06 placed a MAG. NAIL

SKETCH OF REFERENCE TIES

Corner Index: A-11

Not to Scale

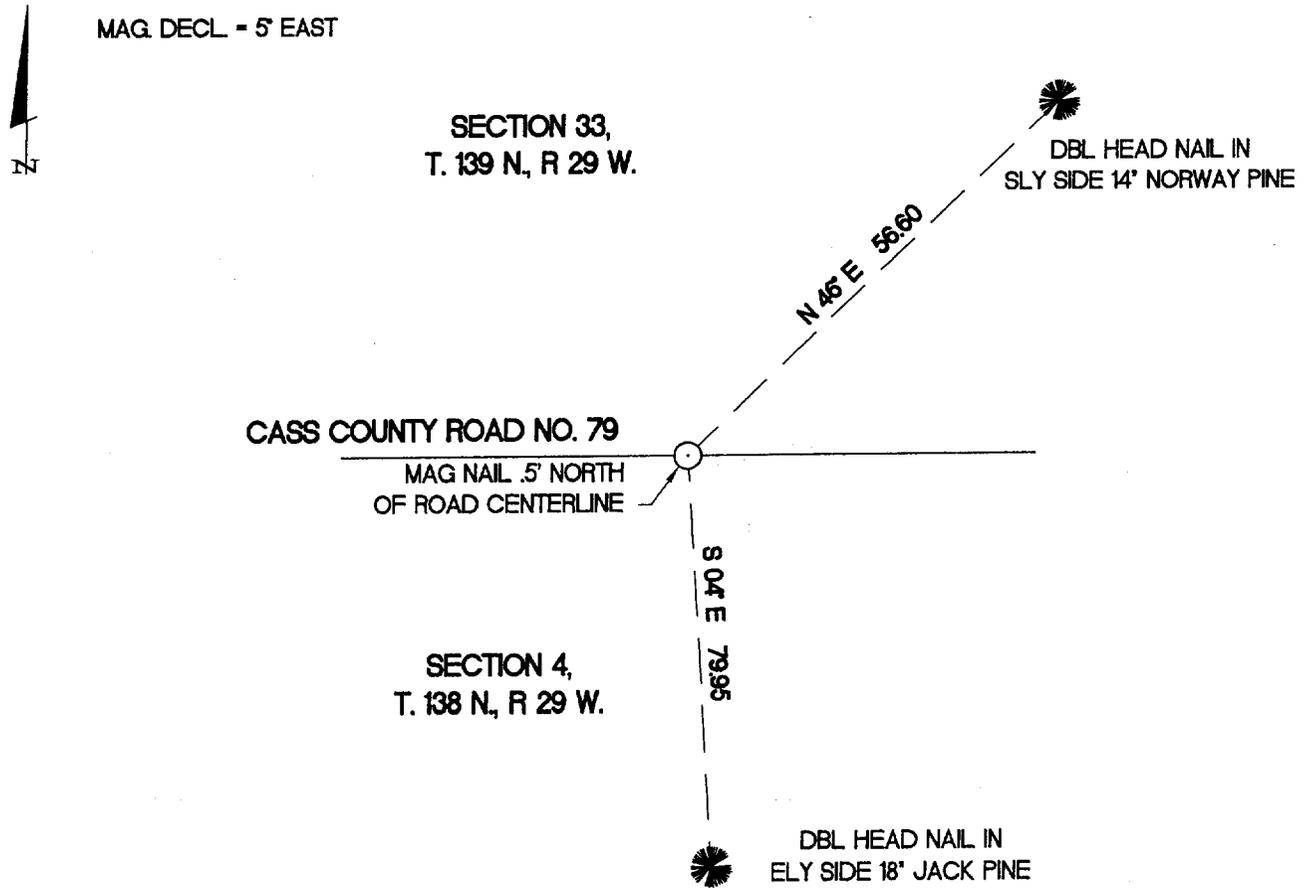

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. A - 11

North Quarter Corner, Section 4, Township 138
North, Range 29 West, Cass County, Minnesota

- 1865 Wright & Walker, U.S. Deputy Surveyors, originally established this corner position while surveying Township 138 North, Range 29 West. A wood post was set to mark the corner position with the following witnesses: An 8 inch Aspen, South 63 degrees West, 6 links; A 10 inch Aspen, North 27 degrees East, 40 links.
- 1968 August, R.F. Schneider, RLS#5740, set a 1 ½ inch iron pipe at the mid point between the Southeast and Southwest Corners of Section 33, Township 139 North, Range 29 West. He notes 3 bearing trees that had been blazed by others. A 10 inch Red Oak, Northwest, 58.40 feet; A 6 inch Red Oak, North-Northwest, 60.35 feet; An 8 inch Red Oak, South-Southeast 65.85 feet. He notes that measurements are taken to the face of the lower blaze, no nails.
- 2004 A Landecker and Associates, Inc. survey crew searches for the corner and finds nothing.
- 2006 December 22nd, a Landecker & Associates, Inc. survey crew, after finding no evidence set a mag nail at the mid point between the Northeast and Northwest Corners of Section 4, the distance found between the Northwest and Northeast corners agrees to that found by Schneider in 1968 to within 0.40 feet. The following witnesses are established: A 14 inch Norway Pine, North 46 degrees East, 56.60 feet; An 18 inch Jack Pine, South 4 degrees East, 79.95 feet.

A000529619

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
08/09/2007 02:36:27PM

AS DOC #: A000529619
PAGES: 3
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M Norby
mm DEPUTY