


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest Corner of Section 33, Township 133, Range 29  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 10/22/08 found a 2" CAPPED IRON PIPE DOWN 1.5 FEET  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

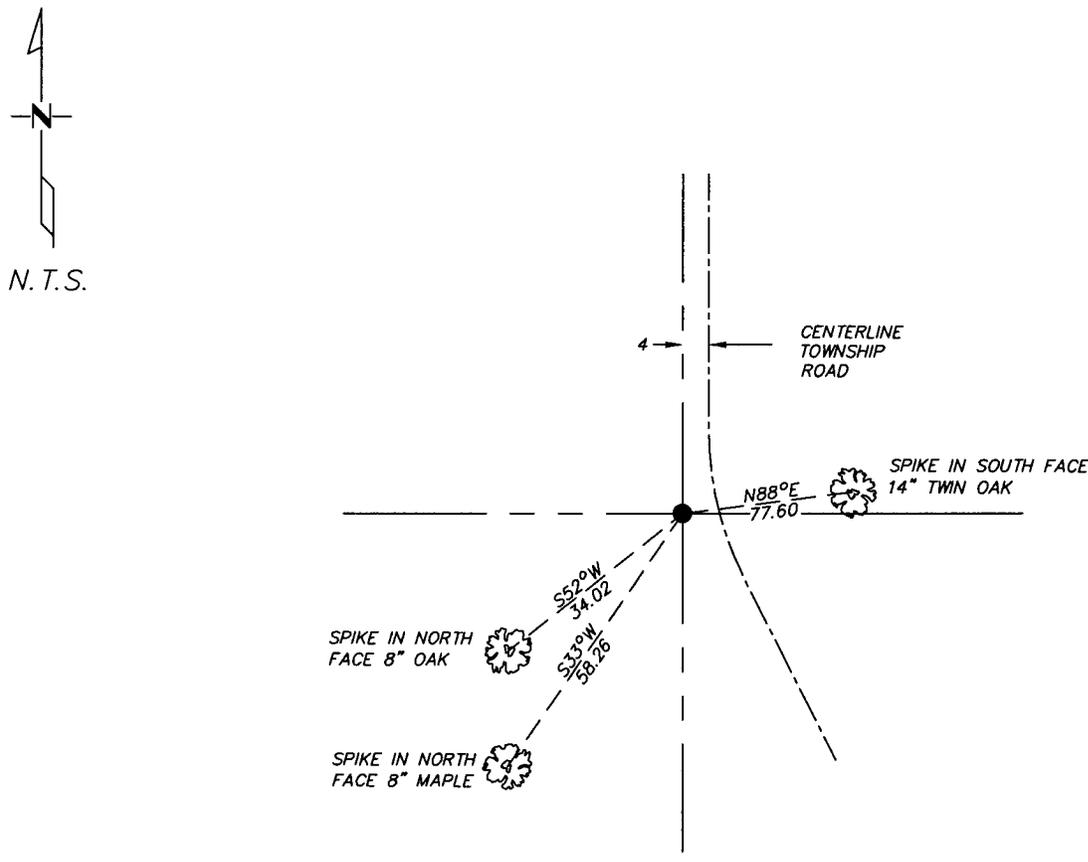

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Rene Heikentz      2-12-09  
SIGNATURE                      DATE  
 Registration No. 45875

- Land Surveyor     Professional Engineer
- County Surveyor     County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_  
 County Recorder \_\_\_\_\_  
 By \_\_\_\_\_, Deputy  
 DOCUMENT NO. \_\_\_\_\_

A000547847

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
04/06/2009 03:32:43PM

AS DOC #: A000547847  
PAGES: 3  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY

*Kathryn M. Norby*  
DEPUTY  
*JK*

## Statement of Evidence

Northwest corner, Section 33, T. 133N. R. 29W., 5th P.M.

1870 – Walker, Allen & Putnam, General Land Office (GLO) Deputy Surveyors, in notes of the subdivision of Township 133 North, Range 29 West, set a wood post for the original corner and referenced it as follows:

18" White Pine N 22° E 95 links (62.70 feet)

18" White Pine S 61° E 132 links (87.12 feet)

18" White Pine N 16–1/2° W 189 links (124.74 feet)

24" White Pine S 0° W 89 links (58.74 feet)

Said record is on file with the Secretary of State (MNSOS), St. Paul, Minnesota, copies are on file in the office of the Cass County Surveyors Office (CCSO).

1905 – W.H. Hallet, Surveyors Report to the County Commissioners on County Roads, on file in the CCSO, shows the GLO distance of 9773 links from the northeast corner of Section 29 to Meander Corner No. 36 between Sections 32 and 33 on the north bank of the Crow Wing River, being a route for a road that passes over the subject corner.

1949 – Bureau of Land Management (BLM) Set a 2 inch diameter pipe with brass cap which was "determined on center line of an improved road and lane projected N., and E. of a fence corner to the W. of the road". The following accessories are noted:

8" White Oak N 86–3/4° W 117 links (77.22 feet)

6" Red Oak S 63° W 77 links (50.82 feet)

6" Red Oak N 37° W 105–1/2 links (69.63 feet)

The above record is on file with the MNSOS, copies are on file in the CCSO.

1990 – BLM monument found in place by Tom Thiessen, Minnesota License No. 16097. This information is on file in the office of Westwood Professional Services, Inc., Brainerd, Minnesota

1995 – BLM monument found in place by Wallace F. Buckler, Minnesota License No. 9672, Crosby, Minnesota.

1998 – John Walker, LS 16098, Minnesota Department of Natural Resources, survey of part of Crow Wing State Park in Section 33, on file in the CCSO, indicates an iron pipe recovered at the northwest corner of Section 33.

2002 – Bruce Grivna, LS 17253, Registered Land Survey No. 023, recorded as Document No. 19754 with the Cass County Registrar of Deeds indicates a monument found.

2004 – BLM monument found in place by Wallace F. Buckler, Minnesota License No. 9672, as shown on RLS NO. 31, recorded as Document No. T000022460 with the Cass County Registrar of Deeds

2005 – Bruce Grivna, LS 17253, Registered Land Survey No. 033, recorded as Document No. T000023782 with the Cass County Registrar of Deeds indicates a monument found.

10/22/08 – Westwood Professional Services, Inc. finds the 2 inch diameter BLM monument, down 1.5 feet, the ties to this monument are shown on the front of this certificate.