


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Reference to MC #36 Corner of Section 33, Township 133, Range 29  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 10/22/08 found a 1/2 inch diameter pipe capped RLS NO. 16097  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

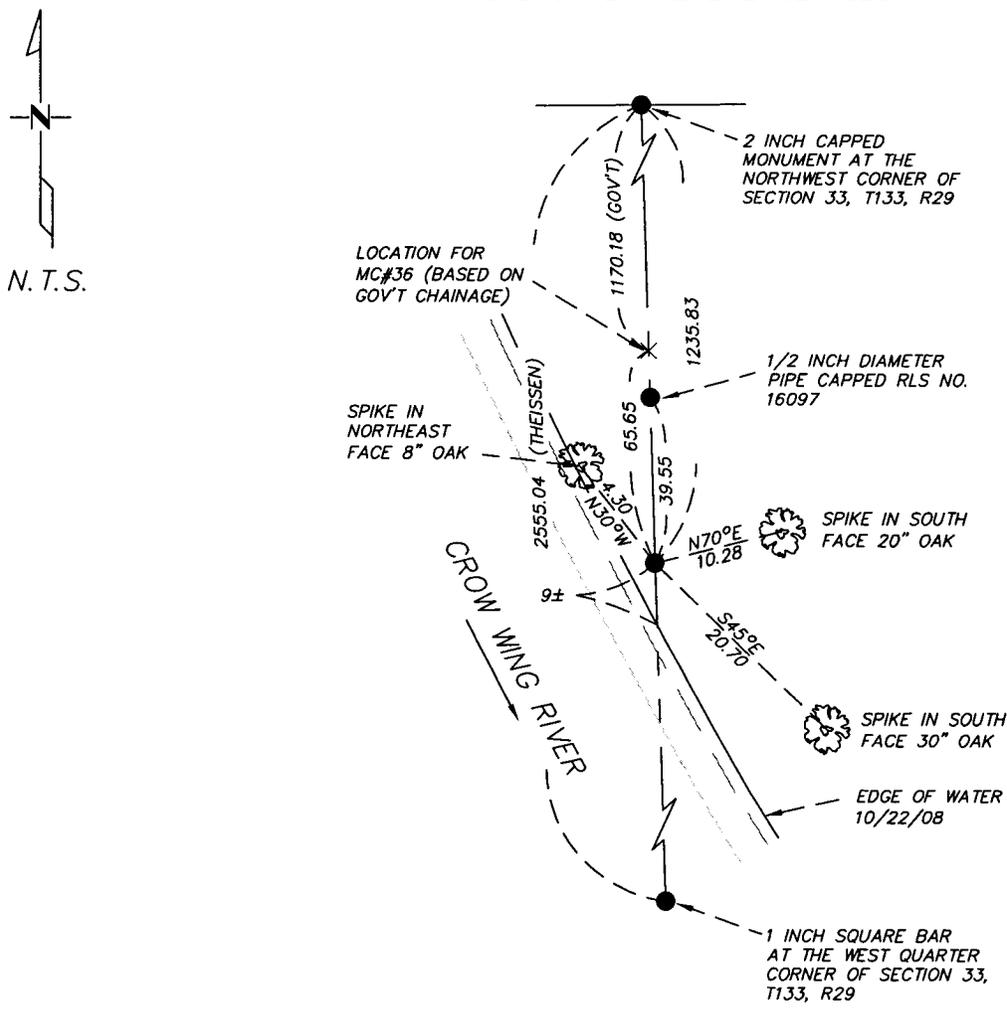

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Rae Herbert      2-10-09  
SIGNATURE                      DATE

Registration No. 45875

- Land Surveyor     Professional Engineer
- County Surveyor     County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_

County Recorder \_\_\_\_\_  
 By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

A000547848

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
04/06/2009 03:32:44PM

AS DOC #: A000547848  
PAGES: 3  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY

*Kathryn M. Norby*  
DEPUTY  
*SKJ*

## Statement of Evidence

Reference to MC #36, Section 33, T. 133N. R. 29W., 5th P.M.

1870 – Walker, Allen & Putnam, General Land Office (GLO) Deputy Surveyors, in the notes of the subdivision of Township 133 North, Range 29 West, set a post for the original corner and referenced it as follows:  
6" Aspen N 55 1/4° E 19 links (5.94 feet)  
3" Oak N 40° W 36 links (23.76 feet)  
Said record is on file with the secretary of State (MNSOS), St Paul, Minnesota, copies are filed with the Cass County Surveyors Office (CCSO).

1905 – W.H. Hallet, Surveyors Report to the County Commissioners on County Road, on file at the CCSO, shows the GLO distance of 9773 links from the northeast corner of Section 29 to Meander Corner No. 36 between Sections 32 and 33 on the north bank of the Crow Wing River.

1949 – The Bureau of Land Management (BLM) Set a 2 inch diameter pipe with brass cap at the northwest corner of Section 33 and ran south searching for MC's and section corners along the west line of Section 33, according to their notes no monuments were found or set along the west line of Section 33. Said records are on file with the MNSOS, copies are filed with the CCSO.

1990 – Field notes prepared under the direction of Tom Thiessen, Minnesota License No. 16097 indicate a found a 2 inch diameter capped pipe at the northwest corner of Section 33, from which he ran a closed traverse south to a 1 inch square bar down 1.5 feet at the West Quarter corner of said Section 33, Thiessen's notes indicate that this corner was evidenced by existing tie trees, the source of these tie trees was not indicated. He then set a 1/2 inch diameter pipe capped RLS No. 16097 at a point on line between the northwest corner and the West Quarter corner of Section 33. Copies of Thiessens field notes are on file at Westwood Professional Services, Brainerd, Minnesota.

1197–2000 – John Walker, LS 16098, Minnesota Department of Natural Resources, survey of part of Crow Wing State Park in Section 33, on file at the CCSO, indicates that only the northwest corner of Section 33 was recovered. This record shows the dimensions to the West Quarter corner and Southwest corner are based on previous surveys by Wallace F. Buckler or Tom Thiessen. This survey monuments the East/West Quarter line of Section 33.

10/22/08 – Westwood Professional Services, Inc. finds a 1/2 inch diameter pipe capped RLS No. 16097 established by Tom Thiessen and excerpts it as being a point indicating the west line of Section 33, the ties to which are shown on the front of this certificate.