

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 20, Township 135, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 7/7/98 found a cluster of three stones (6"x 10" each), down 3.5'  
DATE
- left monument as found,     lowered monument,     removed monument (explain)
- On 7/7/98 Placed a 3/4" X 18" Iron rod with plastic cap marked "DNR Survey  
DATE Marker", down 0.2', in center of stones

SKETCH OF REFERENCE TIES

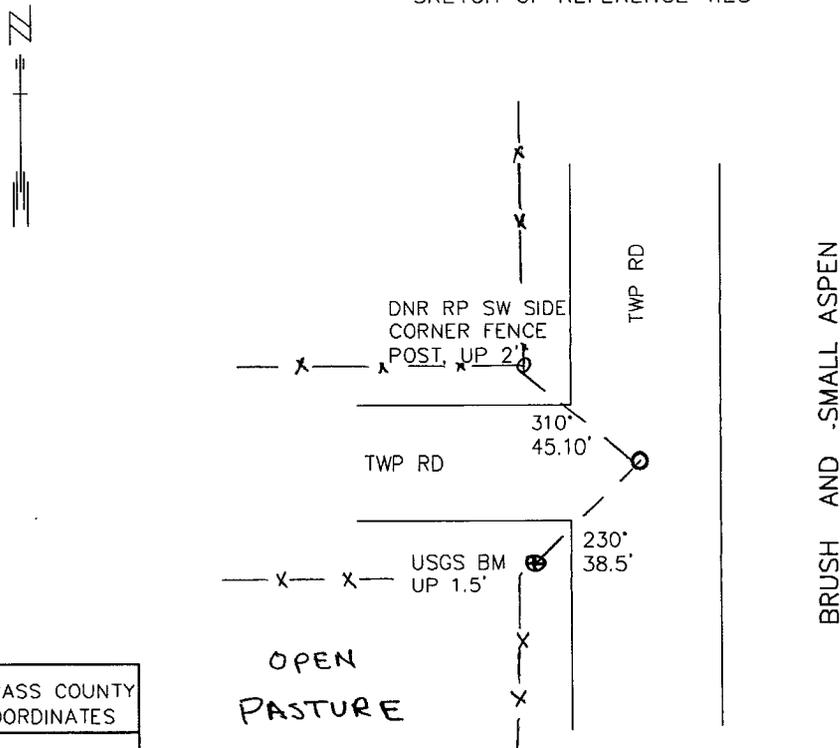

CASS COUNTY  
COORDINATES  
N 225382.95  
E 497642.53

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

2/18/2000  
FOM01856

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*John D. Walker*      4/30/09  
SIGNATURE                      DATE

License Number 16098

- Land Surveyor,     Professional Engineer
- County Surveyor,     County Engineer

OFFICE OF THE COUNTY RECORDER  
County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. recorders office at \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 19\_\_\_\_

County Recorder \_\_\_\_\_  
By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

**Northeast Corner Section 20, Township 135 North, Range 30 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

- MN Secretary of State
- Cass County Surveyor
- Widseth, Smith and Nolting of Brainerd
- Landecker and Associates of Pequot Lakes
- Landecker and Associates of Walker
- Central Minnesota Surveying

1869 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

- Oak 10" S 42° E 32 links (21.12')
- Oak 12" N 46° E 67 links (44.22')
- Oak 10" N 8 ½ ° W 39 links (25.74')
- Birch 8" S 70° W 46 links (30.36')

???? The survey of State Rural Highway No. 80 shows stationing at this corner. I believe the distance to the East Quarter Corner Section 17 is 2646.8'(stationing is hard to read).

1920 Lincoln Mackey surveyed the Rainbow Trail through this township. He found a stone monument that had been set by Hallett and the stump of the NE bearing tree. He took a ties to a 9" poplar S 54° E 43.8' and a U.S.G.S. Bench Mark (3" diameter monument) S 49° 45' W 38.5'. He shows a measurement of 2648.7' to the East Quarter Corner of Section 17.

1998 In February, the DNR survey crew found 1 ½" iron pipe, down 6" in the centerline of a north-south gravel road and in line with the centerline of a gravel road west. A MNDNR Survey Marker was set in the top of the pipe, down 4". The U.S.G.S. Bench Mark is still in place and measures 39.46'. In July the crew dug for the stone that had been set by Hallett. Down 3.5' three 6"x10" stones were found. The tie distance of 38.5' from the BM falls in the center of the stones. The iron pipe and MNDNR Survey Marker were moved to the center of the stones and new ties taken. Distances were measured to the following corners:

- East Quarter Corner Section 17 - N 00°55'55"E 2649.77'
- North Quarter Corner Section 21 - S 89°40'01"E 2641.10'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

A000549046

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
05/12/2009 03:29:20PM

AS DOC #: A000549046  
PAGES: 8 gmw  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY Kathryn M Norby DEPUTY  
mw