

A000549057

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
05/12/2009 03:29:31PM

AS DOC #: A000549057
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M Norby DEPUTY
mw

Index No. A-17


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 3, Township 139 N, Range 27 W

5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/1/08 Placed a 2" X 60" O.D. IRON PIPE UP 1' IN A TAMARACK AND
DATE BLACK SPRUCE SWAMP

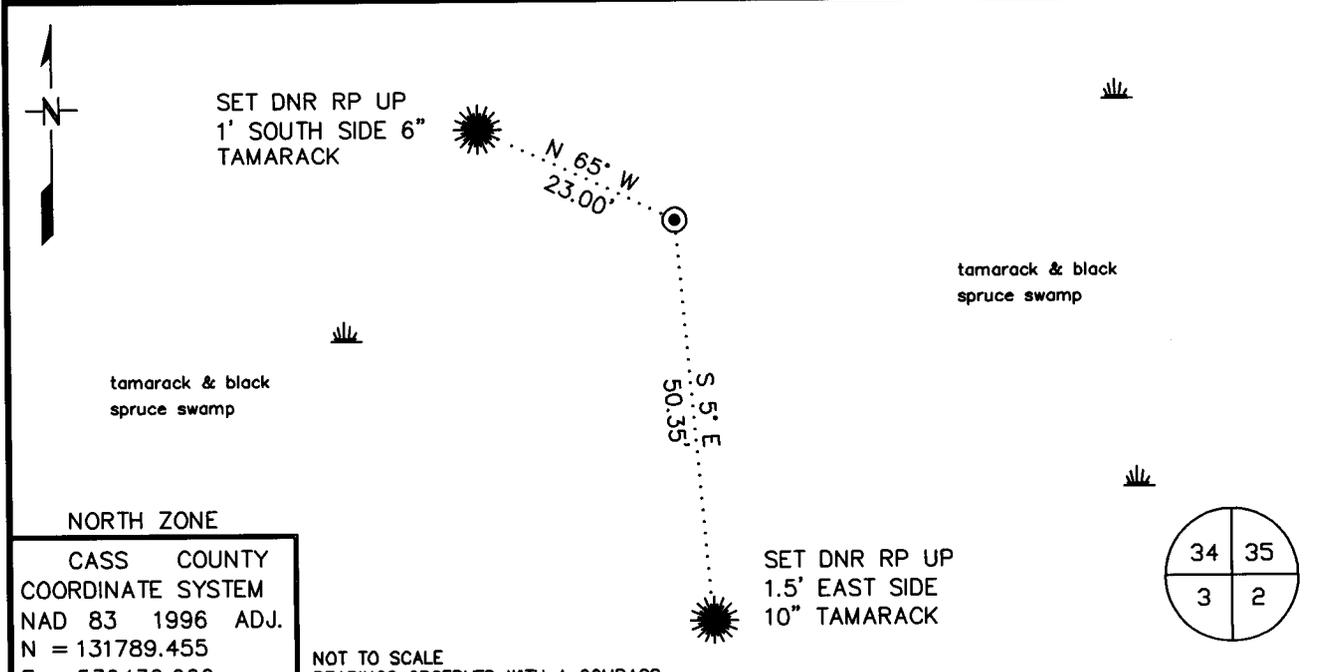

Statement of evidence for this corner location is on back of this page.

RAL DECEMBER 2008
WMA00844

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE Joseph J Fleisher DATE 4/28/09 License Number 44974

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

PAGE 1 OF 2 PAGES

STATEMENT OF EVIDENCE**Northeast Corner Section 3, Township 139 North, Range 27 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State
 Cass County Recorder
 Cass County Surveyor
 Landecker & Associates Inc.
 Washburn Lake DNR Forestry

1863 The US General Land Office field notes, on file in the Secretary of State's Office, indicate a post set at the corner with the following bearing trees:

4" Tamarack	N 8° E	24 Links (15.84')
4" Tamarack	S 61° E	29 Links (19.14')
4" Tamarack	S 2°30' W	41 Links (27.06')
4" Tamarack	N 32° W	41 Links (27.06')

1873 The US General Land Office field notes, on file in the Secretary of State's Office, indicate the corner post reestablished from standing bearing trees.

1936 Civilian Conservation Corps (CCC) field notes Book 7, page 19, located at Washburn Lake DNR Forestry office indicate a tamarack stake set at the approximate corner, 80 chains from the east, as original corner post was not found.

1937 CCC field notes Book 1, page 25, indicate a post at the corner, 88.78 chains as measured from the southeast corner of Section 3.

1990 Landecker & Associates established the corner by single proportion measurement between the Northeast corner of Section 2 and the Northeast corner of Section 4 during the course of a survey for the "Stevens Lake Homesites" plat, but did not set a monument at the corner.

2008 In October, the DNR survey crew searched and found no evidence of the corner or accessories. A 2" x 60" outside diameter iron pipe was set by a single proportion method between the northeast corner of Section 2 and the northeast corner of Section 4 and ties were taken.

Northeast corner of Section 4 bears N 89°46'06" W 5253.47'

Northeast corner of Section 2 bears S 89°46'06" E 5253.47'

For more information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401