

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

MEANDER Corner to Sec. 36 31 T. 140 North R. 27 West 26 West

State of Minnesota }
County of Cass } ss.

I hereby certify that on 12th day of December, 1940

I found the Meander Corner to Sec. 36 T140 N R27W 31 T140 N R26W

which was evidenced by All evidence lost but I re-established the corner. (See Below)

and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of an 1-1/2" iron pipe, 4-1/2' long, capped and stamped.

I further certify that I established two bearing trees for reference or witness monuments consisting of a 5" Ash and a 6" Ash.

which reference or witness monuments are located in the manner following:

Ash 5" N 45 1/2 W 60.7 Feet

Ash 6" N 25 E 147.4 Feet

To locate this corner I started south from the accepted iron pipe corner to Sec. 25 & 36 T 140 N R 27 W and Sec. 30 & 31 T 140 N R 26 W - set by County Surveyor Green in 1924 - on a line bearing S 6 E and ran four miles to the accepted iron pipe corner for Sec. 13 & 24 T 139 N R 27 W and Sec 18 & 19 T 139 N R 26 W - set by Deputy County Surveyor H.S. Todd - setting a temporary corner on the ice on Lake George for the corner to Townships 139 & 140 North Ranges 26 & 27 West. Then I started East from the accepted corner to Sec. 35 & 36 T 140 N R 27 W and Sec. 1 & 2 T 139 N R 27 W - set by Deputy County Surveyor H.S. Todd in 1913 from original evidence and relocated by County Surveyor Green - on a line bearing N 84 E and ran to the iron pipe corner Sec. 31 T 140 N R 26 W and Sec 6 T 139 N R 26 W - set by County Surveyor Green - setting a temporary corner to the four townships on the ice. By double proportion I located the corner to Townships 139 & 140 North Range 27 West and Townships 139 & 140 North Ranges 26 West.


Then by single proportion I located the Meander corner on the North Shore of Lake George between Sec. 36 T 140 N R 27 W and Sec. 31 T 140 N R 26 W.

On the above work I used a Gurley Transit, a standard 100 foot steel tape and a plumb bob for breaking chain.

Dated at Outing Minn., this 3rd day of January

George L. Ryan (Signature)

CCC Camp S-22 Engineer

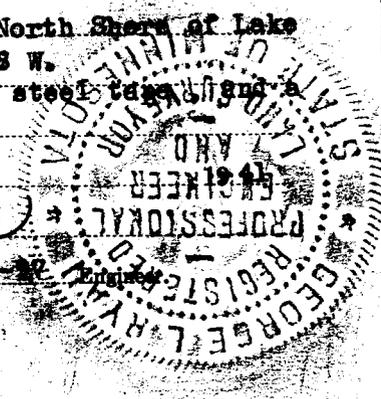

Office of Register of Deeds }
County of } ss.

I hereby certify that the within instrument was filed in this office for record on the day of A. D. 19, at o'clock M.

Register of Deeds.

By Deputy.

A000560850
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
06/07/2010 2:14:10 PM
AS DOC #: A000560850
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER