



8-01-018-9
Tx:4007179

A000562188

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
07/28/2010 08:52:30 AM
AS DOC #: A000562188
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER**

Index No J - 5

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 18, Township 134, Range 30
5TH Principal Meridian, State of Minnesota, County of CASS


At the corner location shown on the sketch:

On 9/05/07 found a 3 INCH IRON PIPE, UP 1 FOOT, LEANING SOUTHERLY

STRAIGHTENED MONUMENT

left monument as found, lowered monument, removed monument (explain)

On _____ Placed a _____
DATE

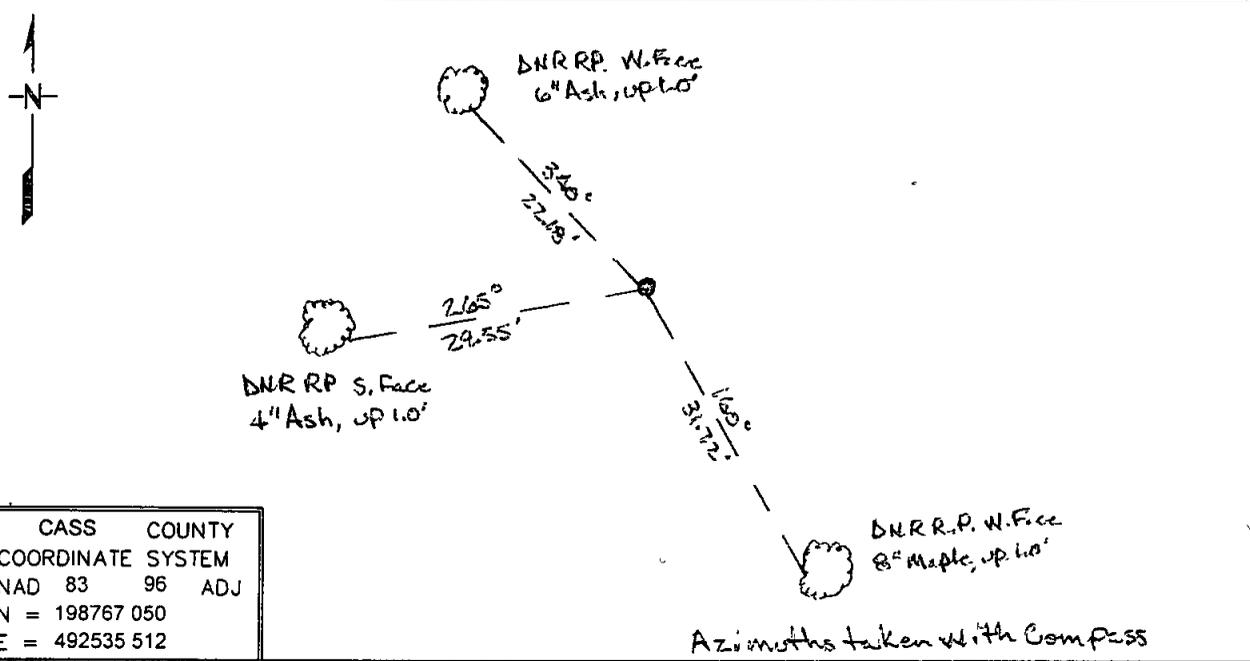

CASS COUNTY
COORDINATE SYSTEM
NAD 83 96 ADJ
N = 198767 050
E = 492535 512

Statement of evidence for this corner location is on back of this page

JDW - 2/25/08
SFT00039 - 1110

I certify that this document was researched and prepared by me or under my direct supervision

SIGNATURE [Signature] DATE 10/8/08 License Number 16098

Title. Land Surveyor Professional Engineer County Surveyor County Engineer

Northeast Corner Section 18, Township 134 North, Range 30 West

The Department of Natural Resources, Division of Lands and Minerals, contacted the following office for information regarding this corner:

MN Secretary of State
 Cass County Surveyor's Office
 Kramer Leas DeLeo
 Westwood Professional Services
 Widseth Smith Nolting & Associates
 Landecker and Associates

- 1868 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and no bearing trees were taken.
- 1972 Plat of Orchard Park by Dean Anderson shows a 2" pipe with aluminum cap at the corner. The plat is tied into an iron pipe on the north line of section 17 by a bearing and distance from the plat monuments. The distance from the pipe on the north line to the Northwest corner is 3074.57'.
- 1994 In April the DNR Survey crew located monuments on the plat of Orchard Park and computed a position for this corner. This computed position was used to double proportion in the Northeast Corner of Section 19. The north south proportion was only 3.7' longer per mile than the GLO for the two miles. A DNR survey marker was set at the computed position to perpetuate the Northeast Corner Section 19. Bearings and distances to the corners used for double proportioning were as follows:
- N01°12'12"E, 5283.69' to the Northeast Corner Section 18 as computed from the Plat of Orchard Park.
 - S89°32'54"E, 5283.94' to the Northeast Corner Section 20
 - S00°44'28"E, 5283.68' to the Northeast Corner Section 30
 - N89°51'38"W, 5464.59' to the Northwest Corner Section 19
- 1997 In June, Landecker and Assoc. surveyed a parcel in Government Lot 2 of section 17. They show monuments at the Northwest and West Quarter corners and also show a position for the North Quarter Corner. A distance of 3077.67' is shown from a point on the north line section to the northwest corner.
- 2007 In September, the DNR survey crew found a 3" iron pipe 4.3' south and 1.4' east of the computed location from the 1994 survey. This iron pipe is the same type as set by Curo in the early 1900's. He and other county surveyors had done a lot of work in this township around 1916. The iron pipe was accepted as marking the obliterated location for the corner and ties were taken.
- Northeast Corner Section 19 bears S01°23'01"W 5279.40'
 - Computed position on the north line section 17 per the plat of Orchard Park bears S89°42'51"E, 3073.05'.

For more information on our survey in this area, please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401