


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 21, Township 133, Range 29  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 5/6/10 found a Cast Iron Monument  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

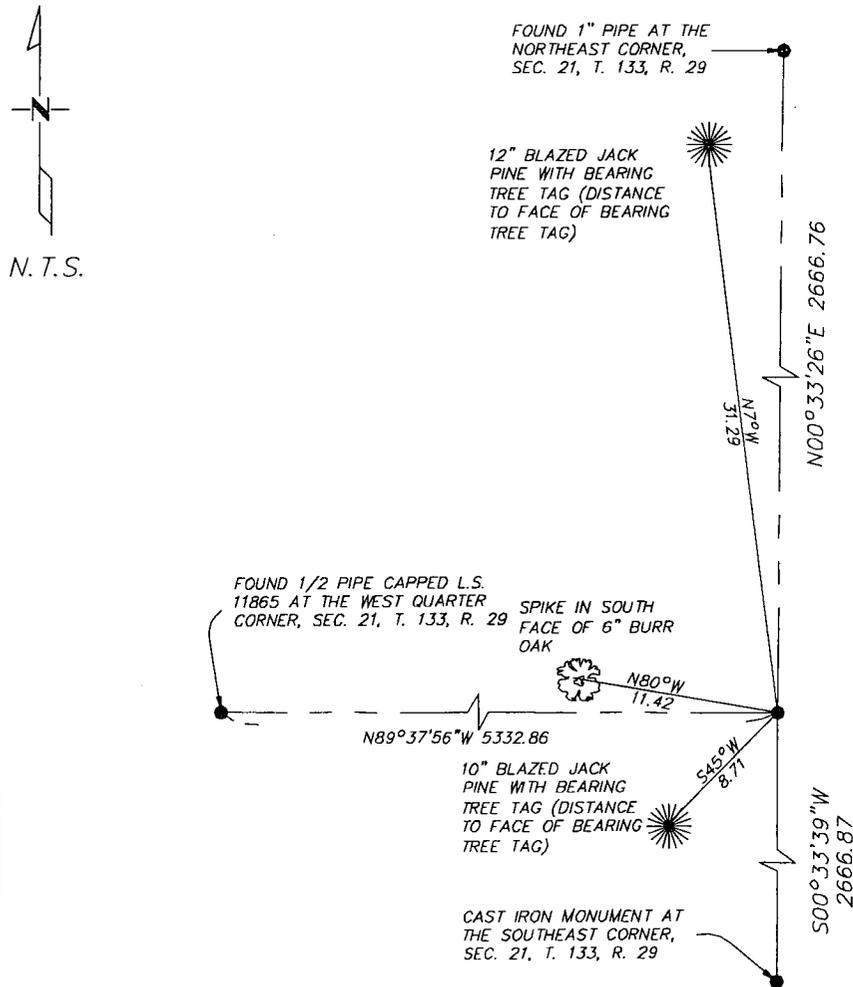

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]      11/2/11  
SIGNATURE      DATE

Registration No. 43932

- Land Surveyor     Professional Engineer  
 County Surveyor     County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_

County Recorder \_\_\_\_\_  
 By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_



Statement of Evidence:

East Quarter Corner of Section 21, Township 133 North, Range 29 West, Sylvania Township, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota.

1870 Original US General Land Office survey set a wood post and bearing trees noted as:

6" Black Pine	N 51 1/4 W	5 links
6" Black Pine	N 67 E	32 links

1892 R.K. Whiteley set corner from original Bearing Trees, referenced in Crow Wing County Record Book W-4, Page 20.

1977 Dean M. Anderson, Registered Land Surveyor Number 3091 searched for evidence of previous surveys and found nothing due to the fact that the area had been cleared and grubbed. He established the Southeast Corner of Section 21 lost by double proportionate method which fit an old fence line running west within a foot. He then set the East Quarter of Section 21 lost as set equal distance between the Northeast and Southeast corners of Section 21. He noted ties:

6" Jack Pine	N10°W	31.20 feet
3" Jack Pine	N89°E	5.22 feet
4" Jack Pine	S30°W	8.75 feet

This information is contained in Crow Wing County Record Book 284, Page 12.

1977 Dean M. Anderson, Registered Land Surveyor Number 3091, indicates monument in place on Certificate of Survey dated June 22, 1977.

1980 Jeff Miller, Registered Land Surveyor Number 13336, shows monument in place on Certificate of Survey.

2009 Don Sigety, Crow Wing County Surveyor shows a cast iron monument in place per Section Subdivision dated May 1, 2009. He shows a distance of 2666.87 feet to a cast iron monument at the Southeast corner of Section 21 and a distance 2666.99 feet to a 1/2 inch iron pipe at the Northeast corner of Section 21 which agrees with 1977 Dean Anderson position.

2010 Westwood Professional Services, Inc. found a Cast Iron Monument and two of the 1977 ties established by Dean Anderson. We measured 2666.76 feet to the Northeast corner of Section 21 and 2666.87 feet to the Southeast corner of Section 21 which agrees with previous measurements by Dean Anderson and Don Sigety. The cast iron monument is accepted as marking the position for this corner. The cast iron monument together with the recovered and established references for the position are shown on the face of this document.

**A000567336**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**01/14/2011 3:34:06 PM**  
**AS DOC #: A000567336**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**

9/1/2010