

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 2, Township 139N, Range 28W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 12/08/2010 found a 2-1/2" Iron pipe for corner, top half broken off.
Date

left monument as found lowered monument removed monument (explain)

On 12/08/2010 placed a 1-1/4" x 7' Iron pipe through old pipe for corner.
Date

SKETCH OF REFERENCE TIES

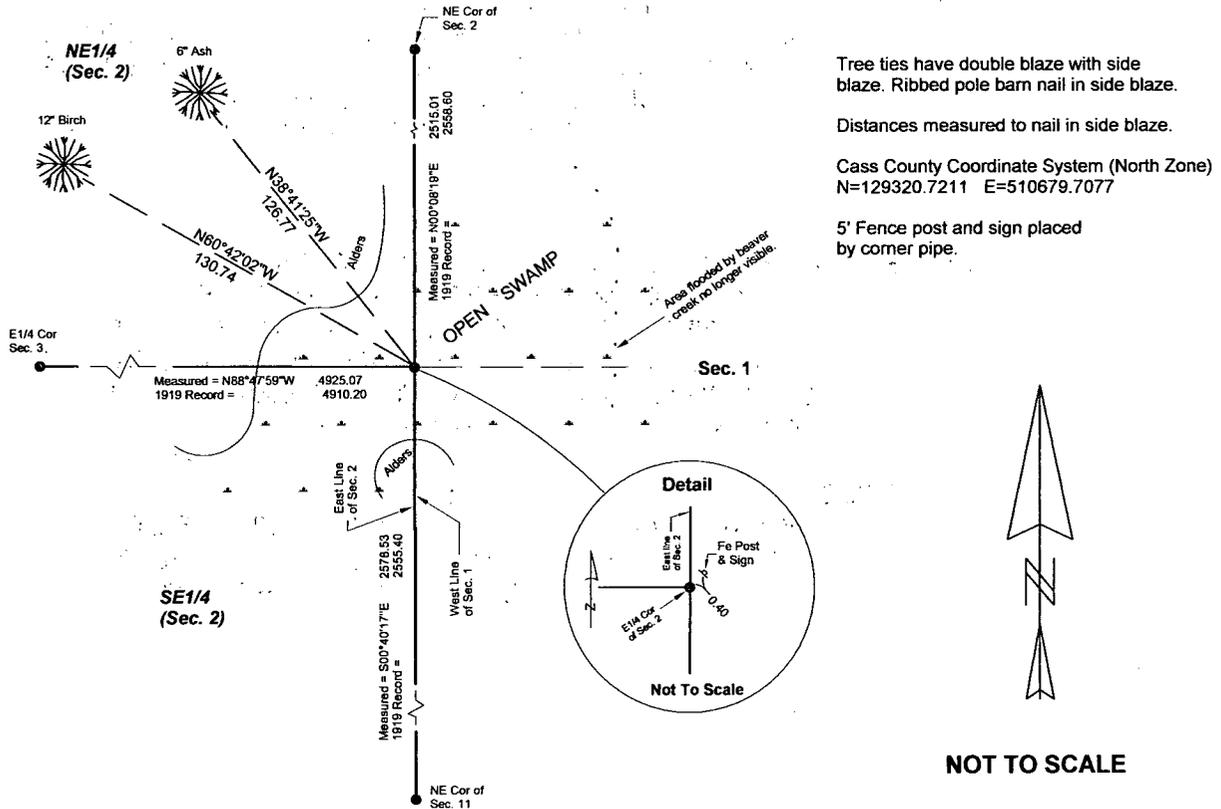

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R Kohout 1/13/11
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

A000567744
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
01/31/2011 08:35:28 AM
AS DOC #: A000567744
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER



STATEMENT OF EVIDENCE:

EAST QUARTER CORNER OF SECTION 2, TWP.139N, RGE. 28W

1864 APRIL DEPUTY SURVEYORS JOHNSON AND THORTON IN THE ORIGINAL GOVERNMENT SURVEY SET A POST.

TIES: 7" ASPEN N 60 W 219 LINKS (144.54 FEET)

5" TAM N 12 E 38 LINKS (25.08 FEET)

1914 TOWNSHIP ROAD ORDER (NO SURVEY)

1919 SEPT. BEN F. CLARK, LS #231, FOR A CONTRACTED COUNTY SUBDIVISION FILED IN THE OFFICE OF THE COUNTY RECORDER ON MARCH 3, 1922 AS DOC. NO. 69793. IN COUNTY SURVEYS BOOK C, PAGE 322 CLARK INDICATED HE SET A 2-1/2" x 48" IRON PIPE AND LISTED ONE TIE TREE - A 10" POPLAR S 44 E 29.9 FEET

2010 DEC. MARVIN R. KOHOUT, LS #17774, AND CREW FOUND CLARK'S MONUMENT IN POOR SHAPE AND BROKEN. THE FOUND PIPE WAS ACCEPTED AS THE EAST QUARTER CORNER OF SECTION 2. A 1-1/4" x 7' IRON PIPE WAS SET THROUGH THE OLD MONUMENT. BEAVER ACTIVITY HAS ELIMINATED OR KILLED NEARLY ALL THE TREES IN THE AREA.

DIRECTION AND DISTANCE TO:

FOUND NORTHEAST CORNER	N 00-08-19 E	2515.01
FOUND SOUTHEAST CORNER	S 00-40-17 E	2578.53
FOUND WEST 1/4 CORNER	N 88-47-59 W	4925.07