

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 6, Township 136, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 11/02/10 found ALUMINUM TELSPAR MONUMENT (FLUSH)
- left monument as found, lowered monument, removed monument (explain)
- On _____ PLACED _____
DATE

SKETCH OF REFERENCE TIES

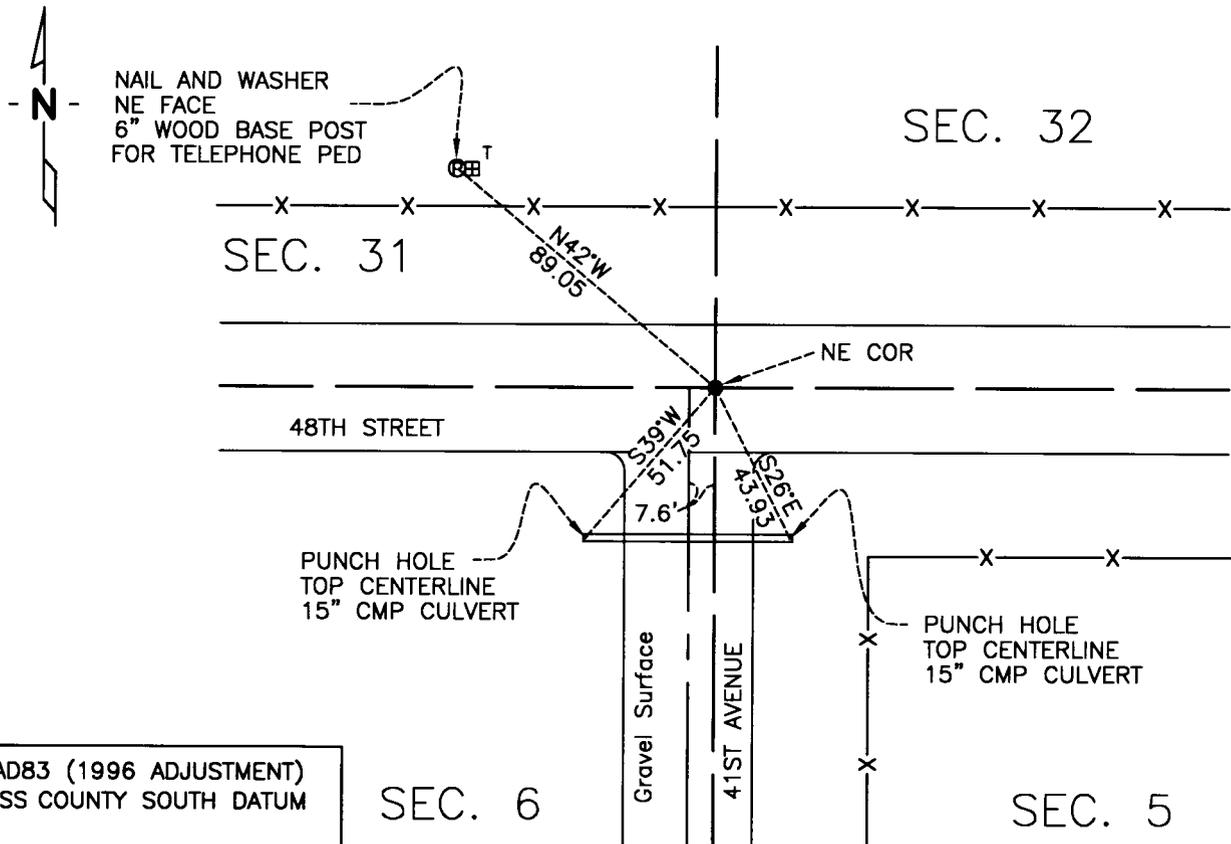

NAD83 (1996 ADJUSTMENT)
CASS COUNTY SOUTH DATUM

N= 273,231.87500
E= 491,997.09600

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
SURVEYOR

2/10/11
DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20__

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____



Statement of Evidence:**Northeast corner of Section 6, Township 136 North, Range 30 West**

- Oct.
1870 R. Cronk, GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:
- 11" W. Pine S821/4°E 218 links (143.88 feet)
12" N. Pine S32°W 166 links (109.56 feet)
- Nov.
1908 John Curo, County Surveyor, found this corner as part of his breakdown and survey of Section 6, Township 136, Range 30, he found all the original GLO bearing trees, County Survey Record Book "B", survey record No. 273. (see page 148 for Curo's notes)(see page 156 for detailed Section 6 measurements). Curo book 85 page 249.
- Oct.
1909 Township Road Order shows no survey.
- 1977 P.F. Schneider for the Highway Dept. Co, Rd. 28 corner position from road stationing.
- Jan.
1995 Minnesota D.N.R. found an Aluminum Cap Monument and made static GPS observations. measured the following ties, punch hole W. end 15" cmp 208° 51.80 ft., punch hole E. end 15" cmp 150° 43.94 ft., DNR RP E. side brace post 326° 89.07 ft.
- July
2001 CCSO found an aluminum cap telspar monument, flush and on centerline of Co. Rd. 28, 9 feet east of centerline of 41 Avenue. measured the following ties, fence post S29°E 79.50 ft., 18" cmp S40°W 51.68 to PK, tele ped post N36°W 89.08 ft., street sign E. flange N10°W 53.71 ft.
- Sept
2002 CCSO gathered a GPS position on the Aluminum Monument.
- Nov.
2010 Craig E. Johnson, LS, CFedS, found the aluminum monument and accepted it as the NE corner of Section 6. Reference ties were taken as depicted on the face of this certificate.

A000568458
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:52:46 AM
AS DOC #: A000568458
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER