

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 32, Township 135, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 11/30/10 found IRON PIPE MARKED 23668
- left monument as found, lowered monument, removed monument (explain)
- On _____ PLACED _____
DATE

SKETCH OF REFERENCE TIES

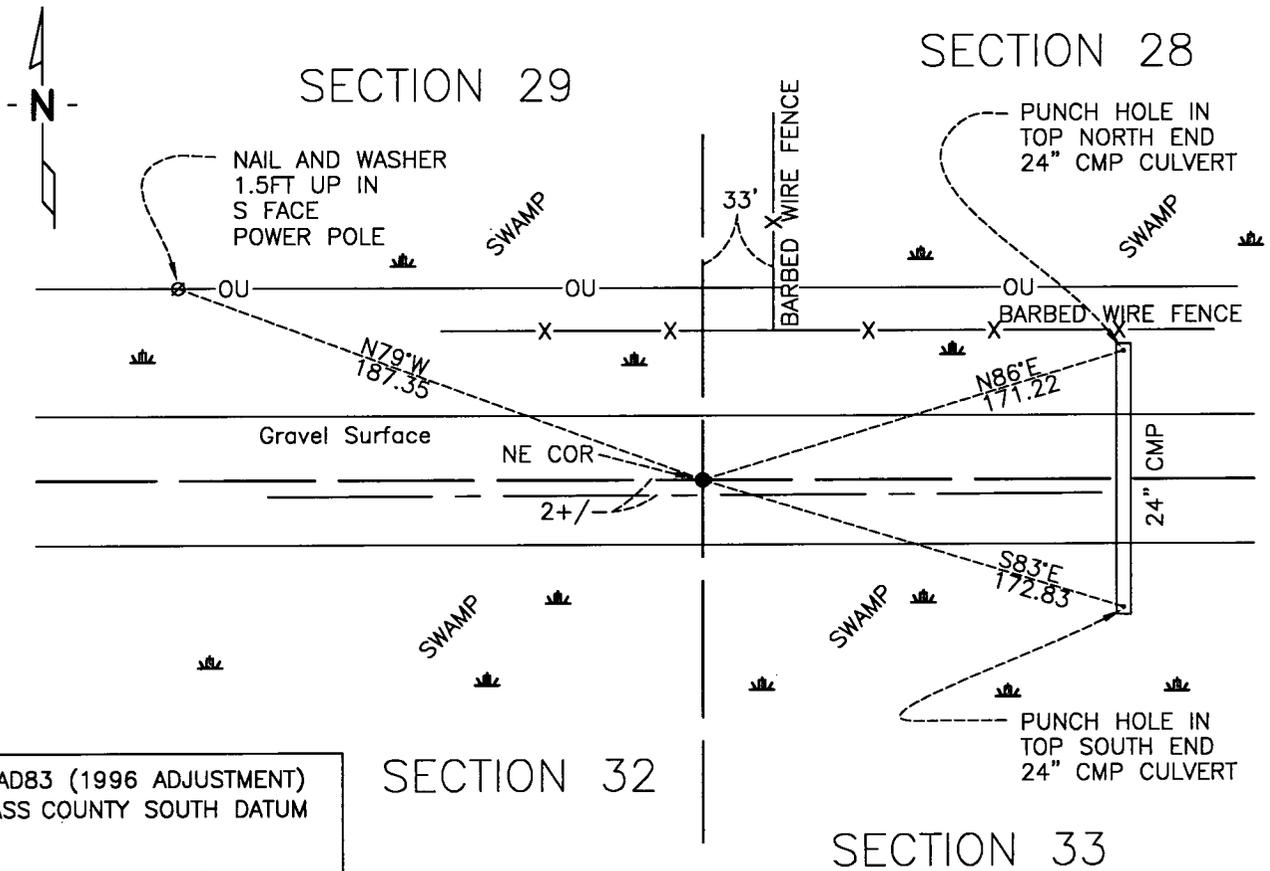

NAD83 (1996 ADJUSTMENT)
CASS COUNTY SOUTH DATUM

N= 214,827.07300
E= 497,788.49000

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 02/14/11
SURVEYOR DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

A000568482
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:53:10 AM
AS DOC #: A000568482
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER



Statement of Evidence:**Northeast corner of Section 32, Township 135 North, Range 30 West**

Oct. T.B. Walker GLO Deputy Surveyor set a wood post for the original
1869 corner and referenced it as follows:

| | | |
|----------|-------|-------------------------|
| 12" Tam. | N50°W | 14 links (9.24 feet) |
| 5" Tam. | S70°W | 15 links (9.90 feet) |
| 8" Tam. | S30°E | 22 links (14.52 feet) |
| 9" Tam. | N30°E | 5 1/2 links (3.63 feet) |

Oct. W.H. Hallett, Surveyor's Report, Township Road Order on file at
1903 the Cass County Highway Department, indicates a road on the East line of Sections 20 and 29.

Feb. W.H. Hallett, Surveyor's Report, Township Road Order on file at
1904 the Cass County Highway Department, indicates a road on the East line of Sections 32 and 29.

Oct. E.B. Horst, LS 376, Deputy County Surveyor, Survey Book C,
1917 Record No. 388, Page 72, on file in the CCSO, states "all down and burned but, we find a piece of the N.W. tree still bearing the scribe marks; from this tree I check up with the other stumps and set a wood post for the true corner." Pictorial on page 73 indicates the following witnesses:

| | |
|-----------------------|-----------------------|
| Wit Post NE 46.7 feet | Wit Post SE 46.7 feet |
| Wit Post SW 46.7 feet | Wit Post NW 46.7 feet |

Nov. J. Kramer, LS 23668, Certificate of Survey, Project No. FINK0501,
2005 on file in the Kramer Leas Deleo, Baxter Office and a copy on file in the CCSO, indicates an iron monument set. Correspondence with Mr. Kramer in 2009, he states this corner "was set back using the E-W road, and an old survey running down this E-W road. I used the N $\frac{1}{4}$ of 33 (pipe) and an occupation at the N $\frac{1}{4}$ of 32, it fit within a foot or so."

Feb. B. Hippen CCSO technician, records of the CCSO, found a 7/8
2009 inch outside diameter iron pipe, down 0.2 foot, 2 feet, more or less, north of centerline of 92nd Street, this agrees with the data on Kramer's 2005 Certificate of Survey, and witnessed the same as follows:

| | | |
|--------------|-------|-------------|
| Power Pole | N75°E | 134.72 feet |
| Power Pole | N85°W | 187.21 feet |
| 36" CMP | S85°E | 160.25 feet |
| Fence Corner | N40°E | 42.5 feet |

Nov. Craig E. Johnson, LS, CFedS, found a 1\2" iron pipe capped
2010 23668, the iron matched the position of the K.L.D. survey. The pipe was accepted as the corner and reference ties set as depicted on the face of this certificate.