

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 01, Township 145 N., Range 30 W., 5th P.M.  
State of Minnesota, County of Cass

At the corner location shown on the sketch:


On \_\_\_\_\_ found \_\_\_\_\_

- left monument as found
- lowered monument
- removed monument (explain)

On 04-05-2011 placed a 4' long 1/2" rebar with a 3.5" diameter brass cap. Set between two 8' fence posts and wired together. Wired a fence post horizontal along side of monument on surface grade.



## SKETCH OF REFERENCE TIES (NOT TO SCALE)

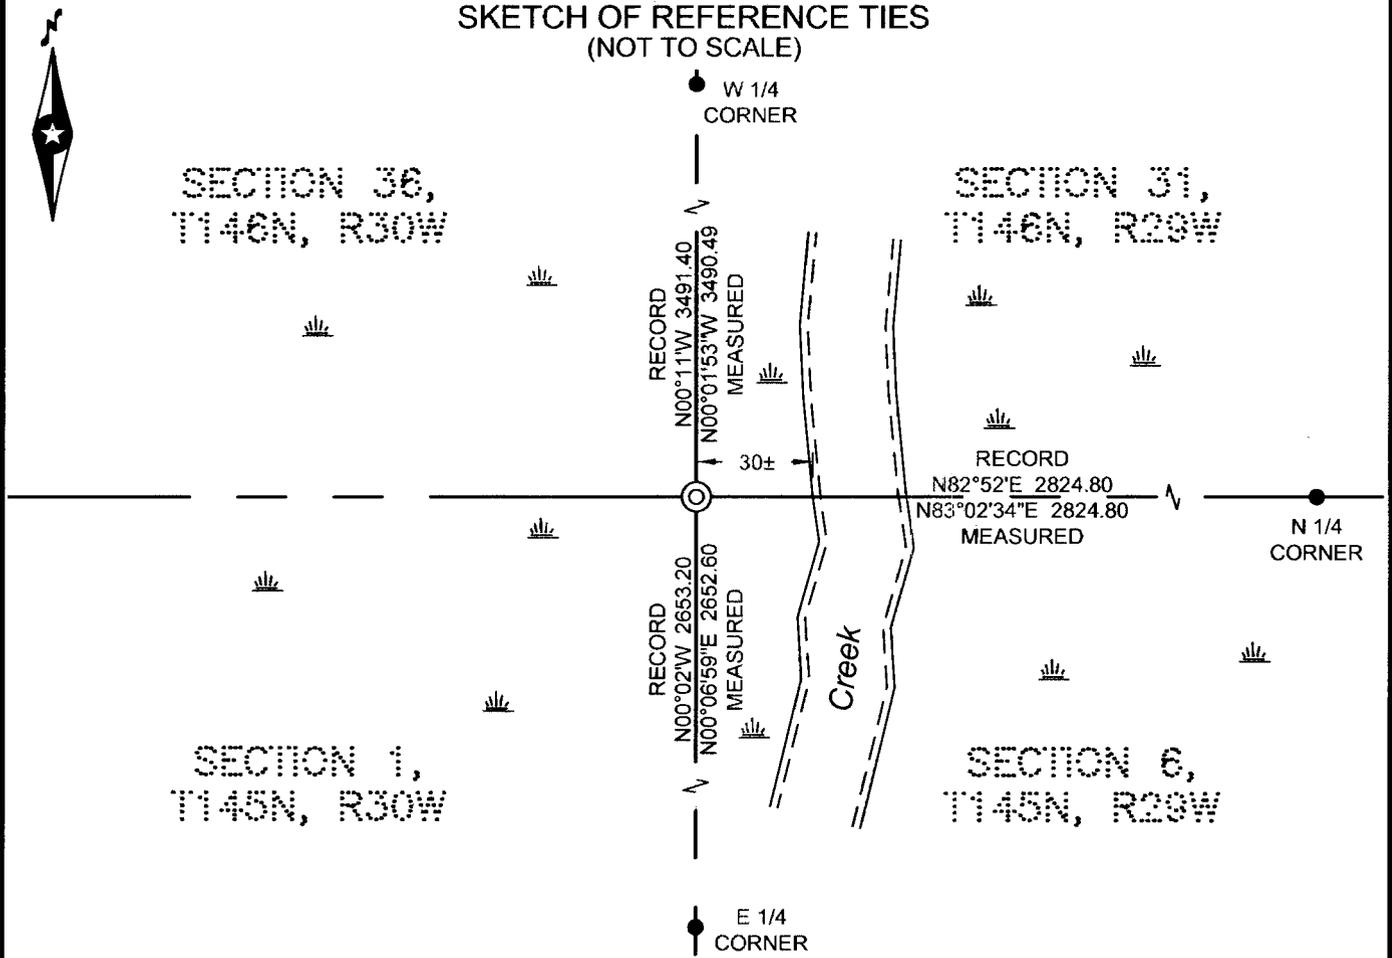

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

  
 Terry L. Freeman, Land Surveyor

Date 2/28/12 MN License No. 21367

**A000578276**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**03/01/2012 2:29:12 PM**  
**AS DOC #: A000578276**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**

Index No.   A.0 - 25.0  

**STATEMENT ON EVIDENCE**

**Northeast Corner of Section 01, Township 145 North, Range 30 West of the 5th Principal Meridian.**

**In 1875**, Benjamin C. Bakdwin, U.S. Deputy Surveyor, set a wood post to mark the location of this corner and established bearing trees as follows: a 8" Tamarack, S70°E 250 links; a 6" Tamarack, N80°E 240 links; a 4" Tamarack, S80°W 177 links; a 4" Tamarack, N70°W 240 links.

**1900 and 1903**, U.S. Army Corp of Engineers maps for the Leech Lake and Lake Winnibigoshish Reservoirs show corner found by surveyors T. Milton Fowble, Horace Dunaway, and W.C. Lemen. A copy of the map is on file in the Cass County Survey Department.

**In 1933**, H. Craig, United States Cadastral Engineer, made a dependent resurvey of Section 36, T146N, R30W, and found remains of the 3 original BTs: a 14" fallen Tamarack (blaze and scribe mark in place), S70°E 250 links; a Tamarack stump (rotted), S79°W 177 links; a 6" Tamarack stump (rotted), N71°W 240 links; 24" Norway Pine, N89 1/2°E 725 links. He set a 6" x 24" concrete monument with a 3 1/2" dia. brass tablet, and established new accessories as follows: a 24" Norway Pine, N41° 08'E 825 links; a 6" x 72" tamarack stake alongside (Running notes on file in Cass County Survey Department)

**On April 5, 2011**, a Northern Engineering & Consulting survey crew set a 4" long 1/2" rebar with a 3.5" diameter brass cap. Set between two 8" fence posts and wired together. Wired a fence post horizontal along side of monument on surface grade. The latitude of the corner position was determined using a single proportion from found quarter corners north and south of the corner. The departure of the corner position was determined using record departure from the found quarter corner to the east. The quarter corner to the west has been obliterated, so double proportion was not used.

**Minnesota State Plane (Central Zone)**

Northing 1207681.797  
Easting 2583554.574

**County Coordinates (Cass County North)**

Northing 321925.144  
Easting 450634.889

