

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 36, Township 145 N., Range 31 W., 5th P.M.  
State of Minnesota, County of Cass

At the corner location shown on the sketch:


On 05-04-2011 found a 6" diameter concrete cylinder with a 3.5" G.L.O. brass cap,  
2" above the surface grade.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_



## SKETCH OF REFERENCE TIES (NOT TO SCALE)

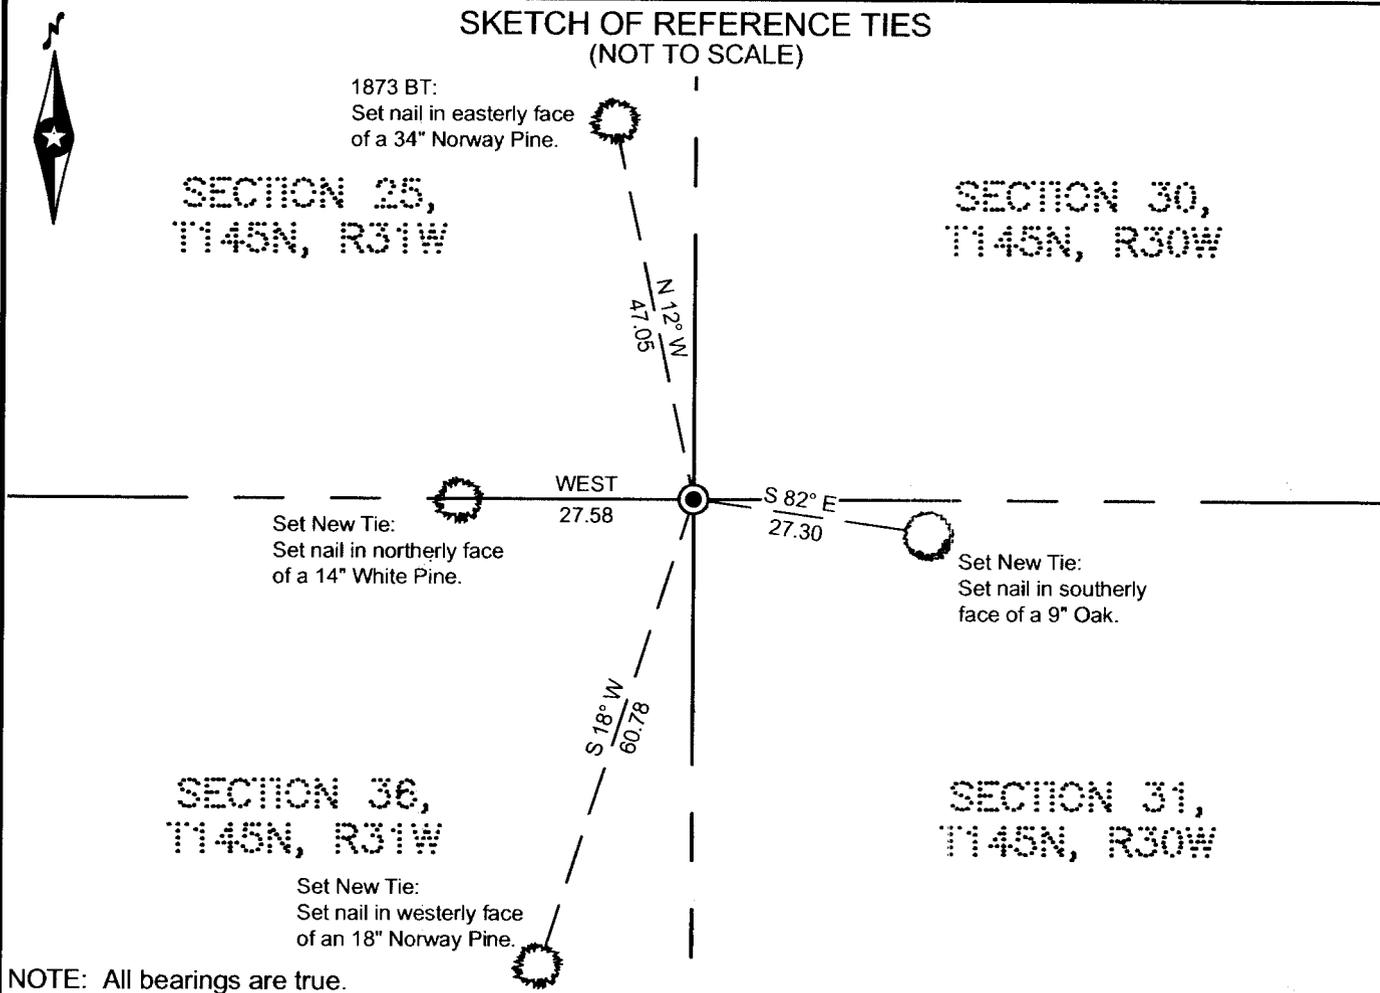

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 12/9/11 MN License No. 21367

**A000578283**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**03/01/2012 2:29:19 PM**  
**AS DOC #: A000578283**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**

Index No. V.0 - 25.0

**STATEMENT ON EVIDENCE**

**Northeast Corner of Section 36, Township 145 North, Range 31 West of the 5th Principal Meridian.**

In 1873, P.H. Conger, U.S. Deputy Surveyor, set a wood post in place to mark the location of the Section corner and established bearing trees as follows: a 8" Norway Pine, N12°W 70 links; a 3" Birch, S73°E 55 links; and a 16" Norway Pine, S50°W 80 links.

In 1933, W. W. Bandy, United States Surveyor, made a dependent resurvey of part of the east boundary of Township 145 North, and found remains of original BTs as follows: a 20" Norway Pine, N11°W 70 links; a Birch stump (rotted), S73 1/2°W 55 links. He set a 6"dia. x 24" cylindrical concrete monument with a 3 1/2" dia. brass tablet and recorded a new BTs: a 7" Burr Oak, N11°E 127 links; a 8" Birch, S30°E 35 links; a 7" White Pine, S47°W 48 links.

On May 4, 2011, a Northern Engineering & Consulting survey crew found a 6" concrete cylinder with a 3-1/2" G.L.O. brass cap up 2" above surface grade. The crew found and set BTs as shown on the front page of this certificate. Concrete cylinder with brass cap accepted as a perpetuation of the original corner.

**Minnesota State Plane (Central Zone)**

Northing 1181005.756  
Easting 2551917.009

**County Coordinates (Cass County North)**

Northing 295264.202  
Easting 418985.456