

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South 1/16th corner of Section 13, Township 145 N., Range 29 W., 5th P.M.
 State of Minnesota, County of Cass

At the corner location shown on the sketch:


On 06-02-2011 found _____ a 2.5" iron pipe with a 3" diameter brass cap,
 _____ 14" above the surface grade.

left monument as found lowered monument removed monument (explain)

On _____ placed _____



SKETCH OF REFERENCE TIES (NOT TO SCALE)

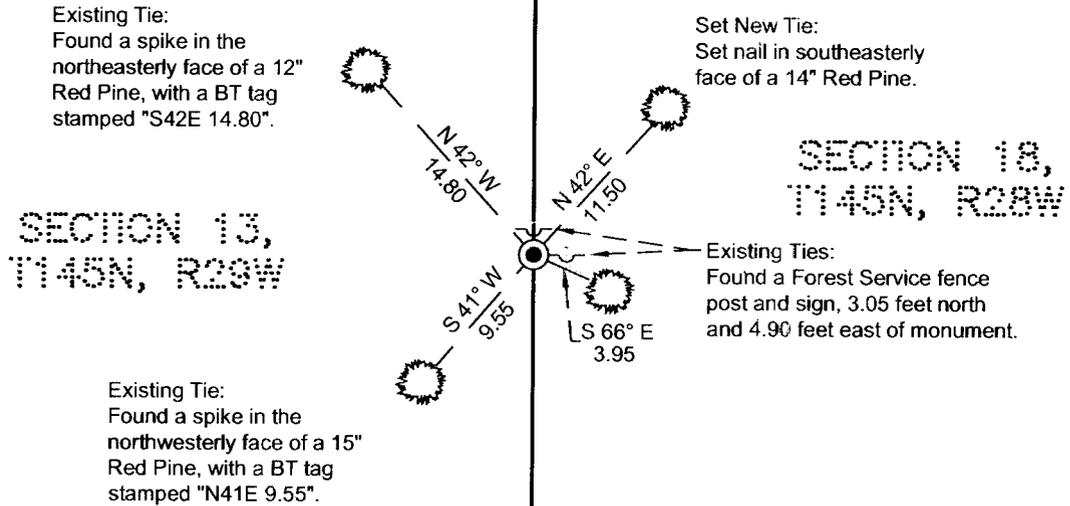

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 12/13/11

MN License No. 21367

A000578286
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
03/01/2012 2:29:22 PM
AS DOC #: A000578286
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

Index No. M.0 - 25.0

STATEMENT ON EVIDENCE

South 1/16th Corner of Section 13, Township 145 North, Range 29 West of the 5th Principal Meridian.

In 1955, Harold Curo survey in Section 18-145-28 (Curo Book 270, Pg. 147-158) shows he set an iron for the corner.

In 1968, William Okerman, U.S.F.S. Surveyor established corner by cadastral survey at proportionate position. He set a 2" x 5' long galvanized iron pipe filled with concrete with a 3" stamped brass cap and marked BT's: a 9" Red Oak, N34"E 109.02 feet; a 10" Red Oak, S48"E 225.20 feet; and an 8" Red Oak, S76"E 189.76 feet. Information on file in the USFS Cass Lake Office T145N R28W Book 1, page 24.

In 1979, MN Department of Natural Resources Engineering office survey shows crew found 1968 brass cap monument. Worksheet on file in Cass County Surveyors office.

In 1992, Gary Brama, U.S.F.S. office personnel found the 1968 monument and northeast BT. He marked new BT's: a 10" Norway Pine, S66"E 3.95 feet; an 11" Norway Pine, S41"W 9.55 feet; an 8" Norway Pine, N42"W 14.80 feet; and a steel sign post, East 4.85 feet. Information in U.S.F.S. Cass Lake office T145N R28W Book 1, Pg. 24.

In 2004, Landecker & Associates, Inc. plats JUDD'S WEST WINNIE and shows brass cap found at corner. Recorded Sept. 30, 2004 as Doc #T000022932.

On June 2, 2011, a Northern Engineering & Consulting survey crew found a 2-1/2" iron pipe with a 3" diameter brass cap, 14" above the surface grade. Three existing ties were found and one new tie was established as shown on the front page of this certificate.

Minnesota State Plane (Central Zone)

Northing 1193787.558
Easting 2615015.357

County Coordinates (Cass County North)

Northing 308017.248
Easting 482088.882

