

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast corner of Section 36, Township 145 N., Range 30 W., 5th P.M.

State of Minnesota, County of Cass

At the corner location shown on the sketch:


On 05-06-2011 found a 6" diameter concrete cylinder with a 3" diameter brass cap,
20" above the surface grade. The monument is approximately 75 feet northerly of Ketchum Road NW.

left monument as found lowered monument removed monument (explain)

On 07-29-2011 lowered monument so that the top is flush with the surface grade.



SKETCH OF REFERENCE TIES (NOT TO SCALE)

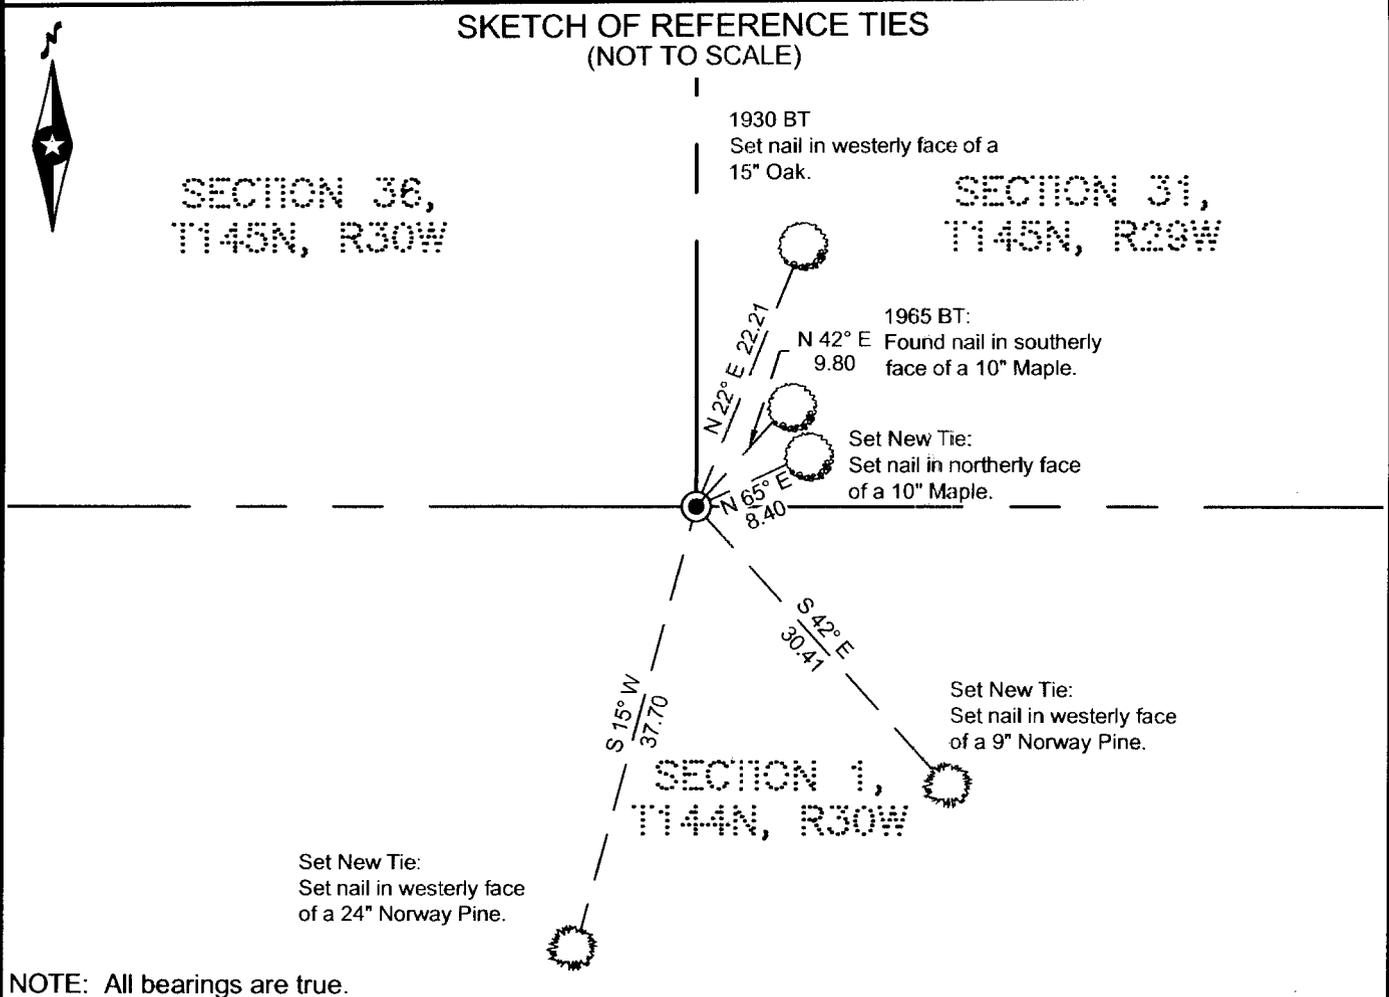

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Terry L. Freeman, Land Surveyor

Date 12/13/11

MN License No. 21367

A000578289
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
03/01/2012 2:29:25 PM
AS DOC #: A000578289
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

Index No. Z 0 - 25.0

STATEMENT ON EVIDENCE

Standard Southeast Corner of Section 36, Township 145 North, Range 30 West of the 5th Principal Meridian.

In **1871**, G.R. Stuntz, U.S. Deputy Surveyor set a wood post in place to mark the location of this corner and established bearing trees as follows: a 7" Aspen, N50°E 30 links and a 14" Yellow Pine, N70°W 30 links.

In **1900 and 1903**, U.S. Army Corp of Engineers maps for the Leech Lake and Lake Winnibigoshish Reservoirs shows the corner was found by surveyors Horace Dunaway, T. Milton Fowble, and W.C. Lemen. A copy of the map is on file in the Cass County Survey Department.

In **1930**, Willis W. Bandy, United States Surveyor found both original BT's and set a 26" long 6" diameter concrete cylinder with a brass cap and marked a new bearing tree: a 9" Burr Oak, N18°E 34 links. Notes on file in the Cass County Survey Department.

In **November 1965**, James Ekstrom, U.S.F.S. personnel notes in T145N R30W, Book 2, page 7 that the 1930 GLO monument was not found, as the area has been "dozed up". He found the stump of the northwest original BT and the 1930 BT. He set a 6" diameter 5' long concrete cylinder with stamped brass cap and marked two BT's: a 6" Oak, N7°W 56.2 feet and a 6" Maple, N42°E 9.8 feet. William Okerman, U.S.F.S. Surveyor recorded an Affidavit as to Location of Government Corner on Nov. 17, 1966 with the same information as the 1965 Ekstrom information.

On **May 6, 2011**, a Northern Engineering & Consulting survey crew found the concrete cylinder with brass cap up 20" and the 1930 BT and the 1965 northeast BT.

On **July 29, 2011**, a Northern Engineering & Consulting survey crew lowered the monument so that the top is flush with the surface grade. Four new bearing trees were marked as shown on the front page of this certificate. Northern Engineering & Consulting accepts the found monument as a perpetuation of the original corner.

Minnesota State Plane (Central Zone)

Northing 1175686.176
Easting 2583335.401

County Coordinates (Cass County North)

Northing 289930.078
Easting 450401.211

