

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 01, Township 141 N., Range 31 W., 5th P.M.
 State of Minnesota, County of Cass

At the corner location shown on the sketch:


On 04-18-2011 found 1917 and 1984 bearing trees.

left monument as found lowered monument removed monument (explain)

On 04-18-2011 placed a 1/2" x 24" rebar with a 3-1/2" diameter brass cap,
flush with the bituminous surface.




SKETCH OF REFERENCE TIES (NOT TO SCALE)

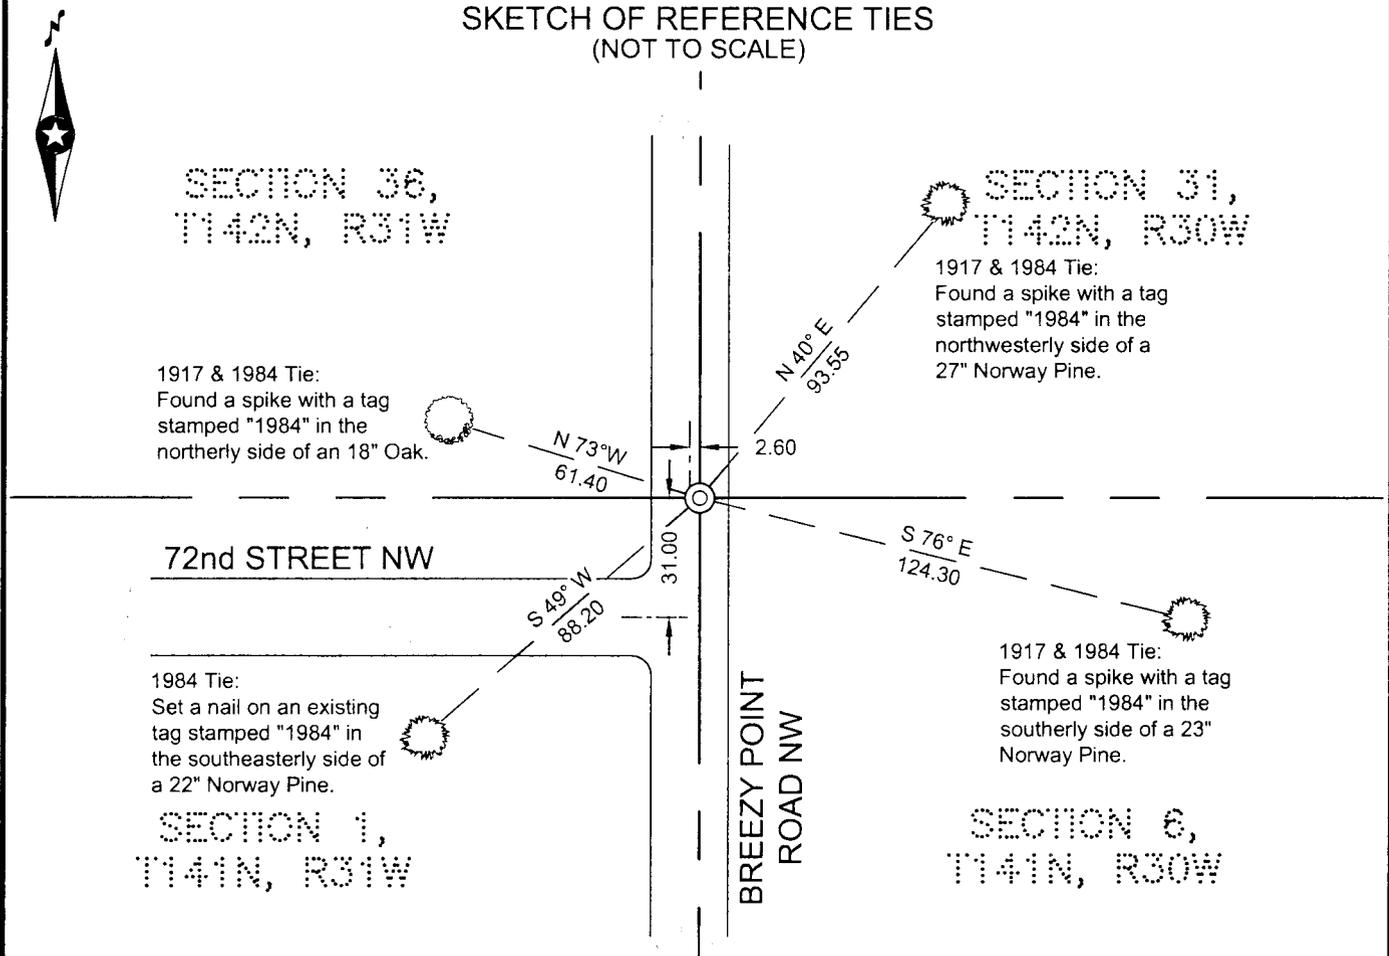

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

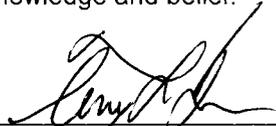
 Terry L. Freeman, Land Surveyor

Date 2/28/12 MN License No. 21367

A000578311
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
03/01/2012 2:29:47 PM
AS DOC #: A000578311
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER

Index No. A.0 - 25.0

STATEMENT ON EVIDENCE

Northeast Corner of Section 01, Township 141 North, Range 31 West of the 5th Principal Meridian.

In 1873, P.H. Conger, U.S. Deputy Surveyor, set a wood post in place for the location of this corner and established bearing trees as follows: a 14" Aspen, N33°E 36 links; an 8" White Pine, N15°W 43 links; a 10" White Pine, S48°30'W 87 links; and a 7" White Pine, S80°E 37 links.

In 1911, County Surveyor John Curo and Deputy Harry S. Todd found hub set from old Government BT's. They set a 2" x 48" capped galvanized iron pipe. (County Survey Record No. 169 Book A Pages 382-383 also in Curo Book 73 Pages 21-24, and Book 98, Pg. 51)

In 1916, E.B. Horst, Deputy County Surveyor, finds iron monument set by Curo. (County Survey Record #478 Book C, Page 523 also in Curo Book 80 Page 40)

In 1917, County Surveyor, E.B. Horst, shows 2-1/2" x 48" iron pipe on Section Line Diagram (Curo Book 77, Page 96). Running notes on file in Cass County Survey Department.

In 1917, Albinus N. Kimmell, U.S. Cadastral Engineer found 2" iron pipe with cap and original southeast BT. He set a 3" x 36" iron pipe with brass cap and marked BT's: an 8" Norway Pine, N38°E 142 links; a 6" Norway Pine, S77°E 188 links; a 5" White Oak S7-3/4°W 282 links; and a 6" White Oak, N75-1/2°W 93 links.

In 1922, Township Road order shows no survey. Information in Cass County Surveyors Office.

In 1984, U.S.F.S. personnel Krause, Brama, and Allison and Cass County technician Freeman find a 2" x 28" iron pipe bent south. They straightened and reset down 0.8' in road. They placed tags on northeast, southeast, and northwest 1918 GLO BT's and mark new BT: a 17" Norway Pine, S49°W 88.2 feet. Information in U.S.F.S. Cass Lake office T141N R30W Book 5, Page 16 and on Cass County Corner Card.

On April 4, 2011, a Northern Engineering & Consulting survey crew find iron gone and find northeast, southeast, and northwest 1918 GLO BT's and 1984 U.S.F.S. BT and set a 1/2" x 24" rebar with a 3.5" diameter brass cap, flush with the surface grade. The corner is accepted as a perpetuation of the original corner.

Minnesota State Plane (Central Zone)

Northing 1082056.772
Easting 2553825.428

County Coordinates (Cass County North)

Northing 196311.802
Easting 420847.076

