

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 27, Township 135 N, Range 32 W

5TH Principal Meridian, State of Minnesota, County of CASS


At the corner location shown on the sketch:

On 12-8-11 found a 2 1/2 INCH I.D. IRON PIPE 4" BELOW ROAD SURFACE  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On                      Placed a                       
DATE

Tx: 4023956  
0  
3  
3  
3  
0  
8

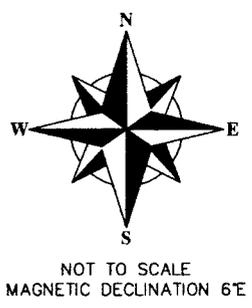

### SKETCH OF REFERENCE TIES

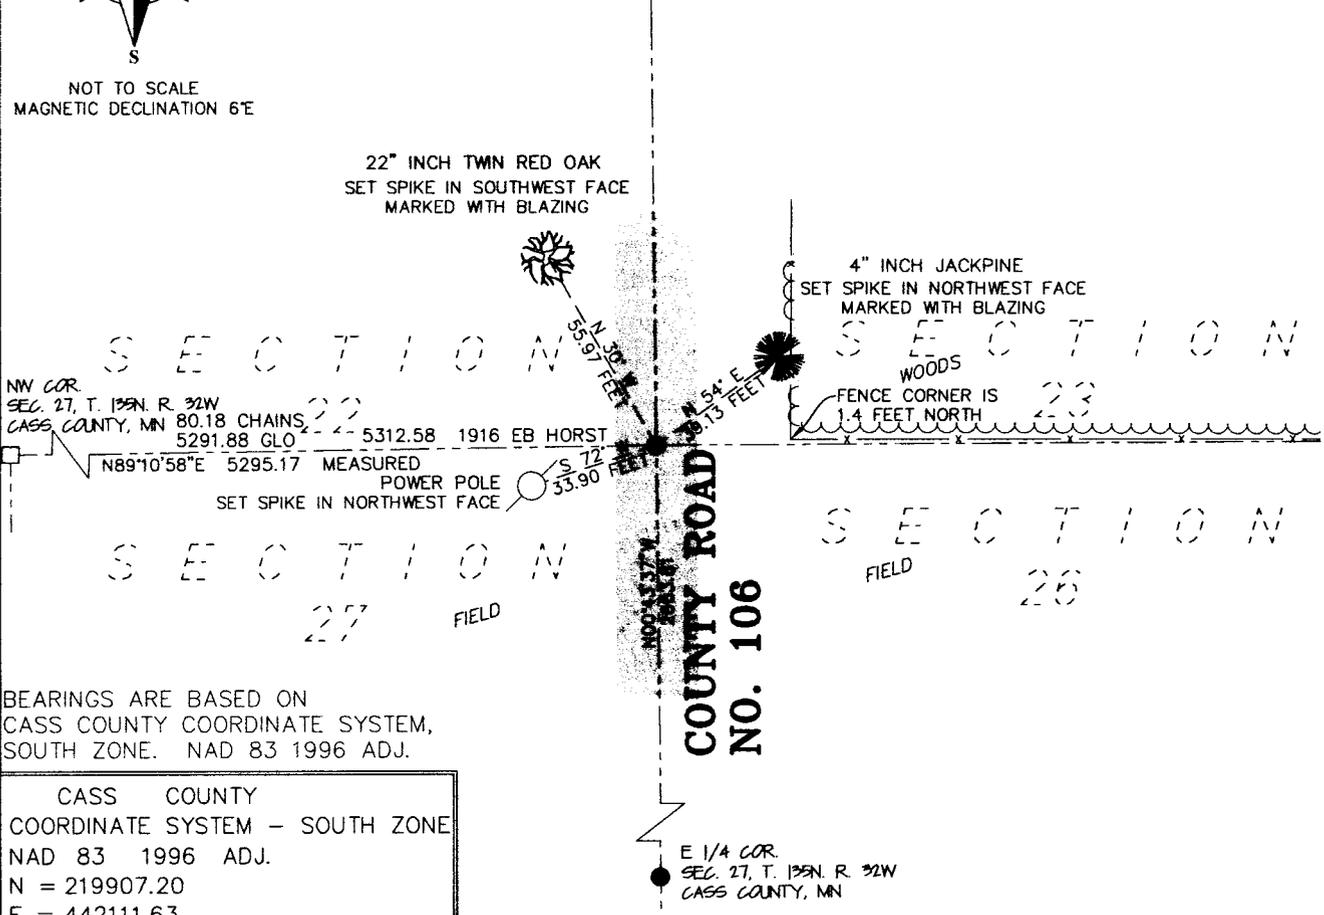

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*[Signature]* 3/1/2012  
Signature Date

License No. 17768

Land Surveyor  Professional Engineer  
 County Surveyor  County Engineer

**OFFICE OF THE COUNTY RECORDER**  
County of CASS


I hereby certify that this document was filed in the County Recorders office at                      M. on the                      day of                      A.D., 20                    

County Recorder                       
By                     , Deputy

DOCUMENT NO.

Northeast Corner, Section 27, Township 135 North, Range 32, Cass County, MN

- 1866 Oscar E. Garrison, GLO Deputy Surveyor, set post with four bearing trees for this corner. Reference ties: 10 inch Yellow Pine S 50 degrees W .68 chains; 16 inch Yellow Pine N 78 degrees W .67 chains; 14 inch Yellow Pine S 70 degrees E .61 chains; 10 inch Yellow Pine N 52 ½ degrees E .82 chains.
- 1866 The GLO measurement between the Northwest corner of said Section 27 and the Northeast corner of said Section 27 measurement = 80.18 chains or 5291.88 feet
- 7/1916 Survey Book C, Page 49 - EB Horst measured from the Northwest corner of said Section 27 to the Northeast corner of said Section 27 measurement = 5312.58 feet to a post in the center of the road. He verified the post with the badly burned stumps for the bearing trees from the original survey. He replaced the post with a iron monument and remarked the bearing tree stumps.
- 12/2011 Arro Land Surveyors search the area for the GLO reference ties and post and found nothing. There was a fence line East and a north-south County Road for occupation.
- 12/2011 Arro Land Surveyors found a 2 ½ inch ID iron pipe 4 inches below the road surface in near the center line of the north-south road. Mr. Horst in 1916 replaced the post with an iron monument. The found monument was accepted as the corner for the Northeast corner of said Section 27. Arro's measurement between the found monuments for the Northwest corner of said Section 27 and the Northeast corner of said Section 27 measurement = 5295.17 feet

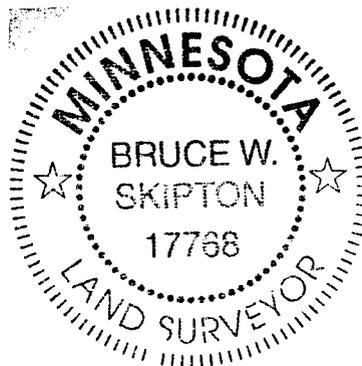

**A000578691**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**03/15/2012 10:27:20 AM**  
**AS DOC #: A000578691**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**