



8 0 3 7 2 7 5

Tx:4026798

A000581279

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
06/12/2012 11:25:17 AM
AS DOC #: A000581279
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER**

Index No. N-5

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


 NORTHEAST Corner of Section 19 , Township 135 , Range 32
 5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On found a
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/29/12 Placed a 3/4" X 24" REBAR WITH PLASTIC CAP STAMPED "MN DNR LS 47461"
DATE
 0.4' BELOW SURFACE AND 6' SOUTH OF CENTERLINE OF EAST-WEST GRAVEL ROAD



NO GOOD TIES AVAILABLE

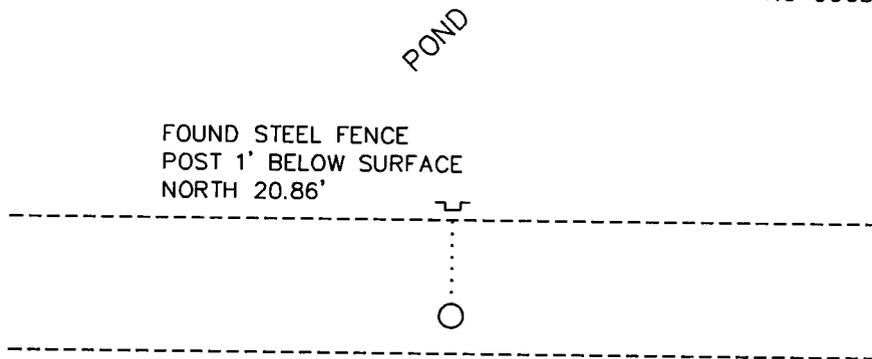

CASS COUNTY
COORDINATE SYSTEM
NAD 83 1996 ADJ.
N = 225066.755
E = 426115.094

NOT TO SCALE.
BEARINGS OBSERVED WITH COMPASS.

Statement of evidence for this corner location is on back of this page.

RAL APRIL 2012
WMA01870.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE DATE 3/15/12 License Number 47461

Title: Land Surveyor County Surveyor

STATEMENT OF EVIDENCE**Northeast Corner of Section 19, Township 135 North, Range 32 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN History Center
 Wadena County Highway Dept.
 Cass County Surveyor
 Wadena County Recorder
 Nyberg Surveying

1866 The US General Land Office field notes, on file in the History Center, show this corner in a pond. Set three witness corner posts:

Witness Corner Post 8.25 chains (544.5') south
 Black Pine 8" N 81° W 1.3 chains (85.8')
 Black Pine 10" S 83° E 1.37 chains (90.42')
 Witness Corner Post 7.5 chains (495') east
 Black Pine 10" S 55° E .70 chains (46.2')
 Black Pine 10" N 55° E 1.15 chains (75.9')
 Witness Corner Post 2.98 chains (196.68') west
 Black Pine 10" N 72° W .59 chains (38.94')
 Black Pine 16" S 32° W .49 chains (32.34')

1920 County Book "C" page 368, on file at the Cass County Surveyor's office, has notes for a survey of Rainbow County Road. E. B. Horst, Cass County Engineer, and Lincoln Mackey, assistant, computed corner by double proportion and set 4 witness iron monuments:

West side of lake - 269.26' with Jack Pine 14" N 65° 32' W 70.5'
 East side of lake - 637.16' with Jack Pine 13" N 56° 31' E 121.2'
 North side of lake - 654.7' with Jack Pine 10" N 22° 14' E 99.8'
 South side of lake - 511.7' with Jack Pine 7" S 61° 59' W 133.3'

They measured 2620.9' to the east quarter corner of section 18, 2681.8' to the north quarter corner of section 20, 2620.8' to the east quarter corner of section 19 and 2634.9' to the north quarter corner of section 19.

2012 In February, the DNR survey crew searched the area and found nothing near the centerline, but did find a 2' steel fence post on the north edge of the east-west gravel roadway. The survey crew searched for the 1920 witness corners but did not find any of them. They located the east-west road, north quarter corner of section 20, east quarter corner of section 19, northwest corner of section 19 and the east quarter corner of section 18. A corner position was computed proportionally using the 1920 measurements to the adjacent corners. The measurements were very close to the 1920 measurements. After analysis, the corner was considered obliterated and accepted at the computed position using the 1920 survey information. An iron monument was set to mark the corner location as shown on the face of this document.

East Quarter Corner of Section 18 bears N02°01'59"E 2620.83'
 East Quarter Corner of Section 19 bears S01°57'53"E 2620.83'
 North Quarter Corner of Section 20 bears N89°28'19"E 2682.73'
 North Quarter Corner of Section 19 bears N89°24'39"W 2635.61'

For information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401